


01CRD0734

Light Source	7x0.5W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=150 120V=37 240V=25
Consumption (W)	24V=3.5 120V=4.4 240V=4.6
Luminance (LM)	CW=88 WW=75
IK	10

Linear Drawing

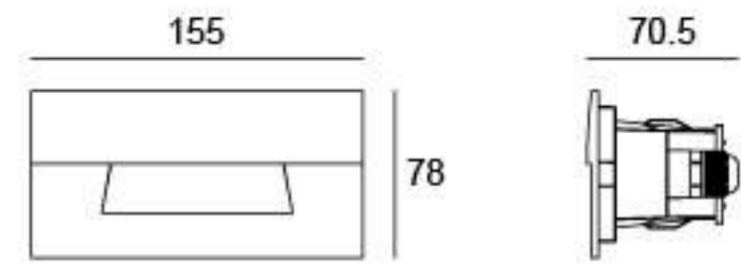

Unit: mm

Specification

Front Cover& Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Option 1:PC/ABS ALLOYS 090# Option 2:Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003

Sleeve



Sleeve 090#

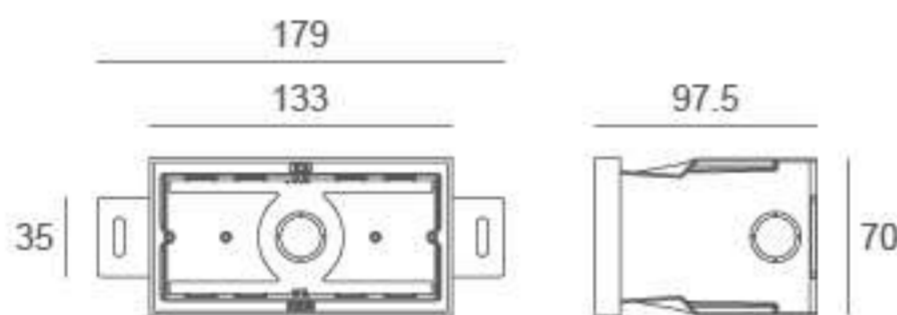


Diagram Of Instruction

