


01CXD0934

Light Source	9x0.5W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=250 240V=46
Consumption (W)	24V=6 240V=6.3
Luminance (LM)	WW=172
IK	07

Linear Drawing

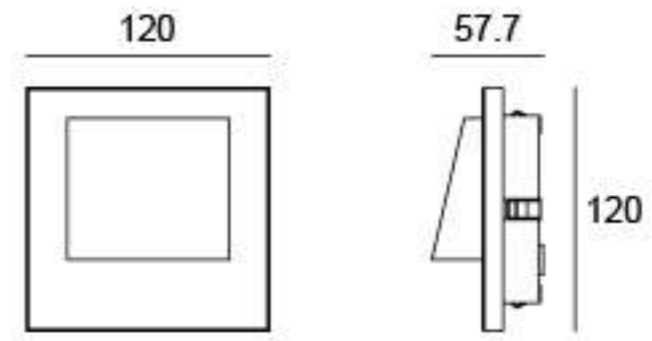

Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Option 1: PC/ABS ALLOYS 150# Option 2: Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm², L=0.3m(24V) AC power: H05RN-F 3×1.0mm², L=0.3m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary



Sanded Black
RAL 9005

Secondary




Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003


Sleeve

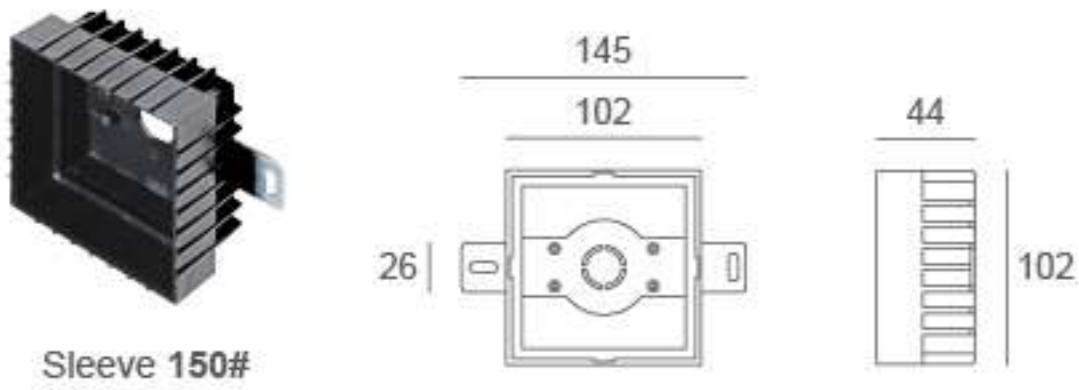

Sleeve 150#


Features

Screwless front cover


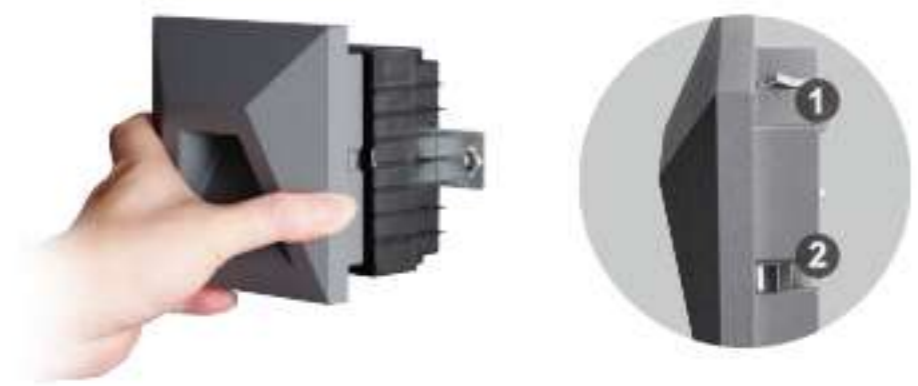


Use the high-strength clips for fixation.
(please refer remark ① & ②)

Diagram Of Instruction

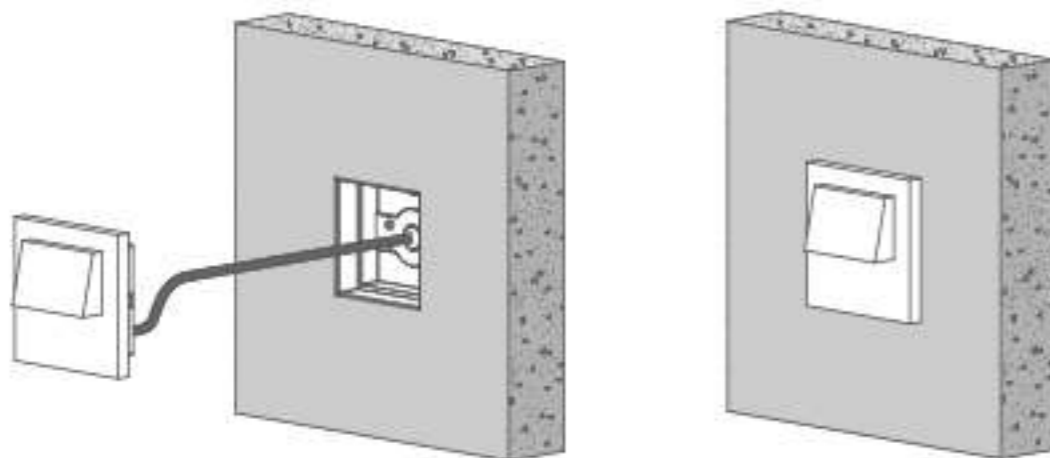

Photometric

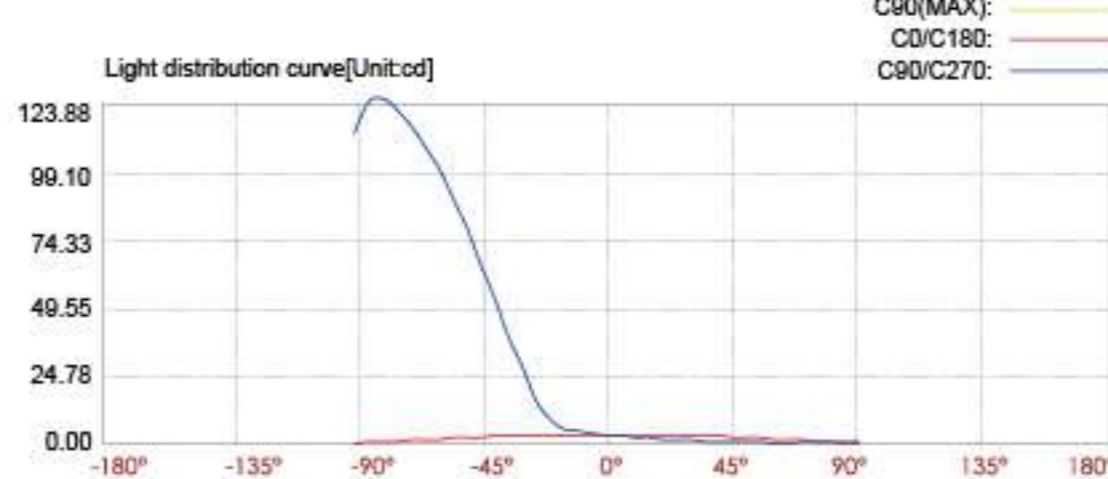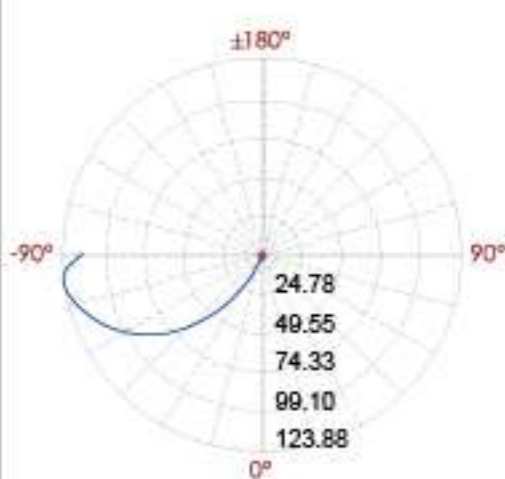

Lux distance curve

Center beam LUX	Illuminance at a distance	
	Beam width V	H
2m 0.85 LUX	4.8m	1.6m
4m 0.21 LUX	9.5m	3.3m
6m 0.10 LUX	14.3m	4.9m
8m 0.05 LUX	19.0m	6.6m
10m 0.03 LUX	23.8m	8.2m
12m 0.02 LUX	28.5m	9.9m

Ver.Spread:99.9 Hertz.Spread:44.7