


01DPD1233

Light Source	12x0.15W
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=125 240V=14
Consumption (W)	24V/240V=3
Luminance (LM)	WW=87
IK	09

Linear Drawing

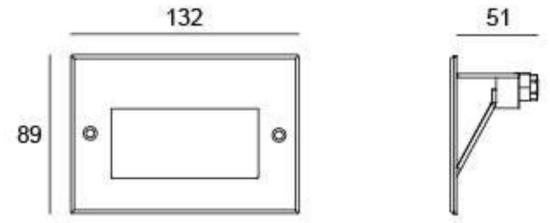

Unit: mm

Specification

Housing	SUS 316#
Light Window	UV stop & flame resistant PC
LED Type	SMD
Cable Gland	IP 67
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2x1.0mm ² , L=0.5m, Low Voltage H05RN-F 3x1.0mm ² , L=0.5m, High Voltage
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request

Color Option



Gunstock Brown-Light
KAP03




Sanded Electrolysis SUS

Sleeve (Stainless Steel, Included)

SUS 202#




Sleeve 270#

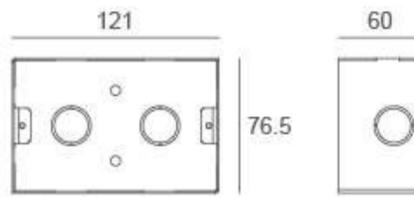

Photometric

12m	0.03 LUX
11m	
10m	0.05 LUX
9m	
8m	0.08 LUX
7m	
6m	0.14 LUX
5m	
4m	0.31 LUX
3m	
2m	1.25 LUX
1m	

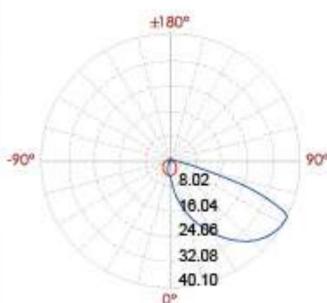

Center beam LUX	Illuminance at a distance		Beam width	
	V	H	V	H
2m	1.25 LUX		4.2m	1.9m
4m	0.31 LUX		8.3m	3.8m
6m	0.14 LUX		12.5m	5.7m
8m	0.08 LUX		16.7m	7.7m
10m	0.05 LUX		20.8m	9.6m
12m	0.03 LUX		25.0m	11.5m

Ver. Spread: 92.4 Horiz. Spread: 51.1