


01DQD2432

Light Source	24x0.09W
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=167 240V=18
Consumption (W)	24V/240V=4
Luminance (LM)	WW=136
IK	09

Linear Drawing

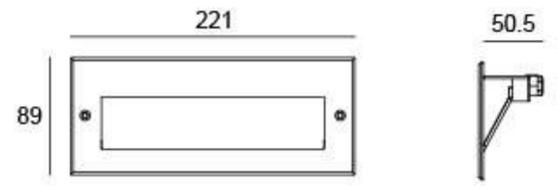

Unit: mm

Specification

Housing	SUS 316#
Light Window	UV stop & flame resistant PC
LED Type	SMD
Cable Gland	IP 67
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2x1.0mm ² , L=0.5m, Low Voltage H05RN-F 3x1.0mm ² , L=0.5m, High Voltage
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request

Color Option



Gunstock Brown-Light
KAP03





Sanded Electrolysis SUS

Sleeve (Stainless Steel, Included)

SUS 202#





Sleeve 271#

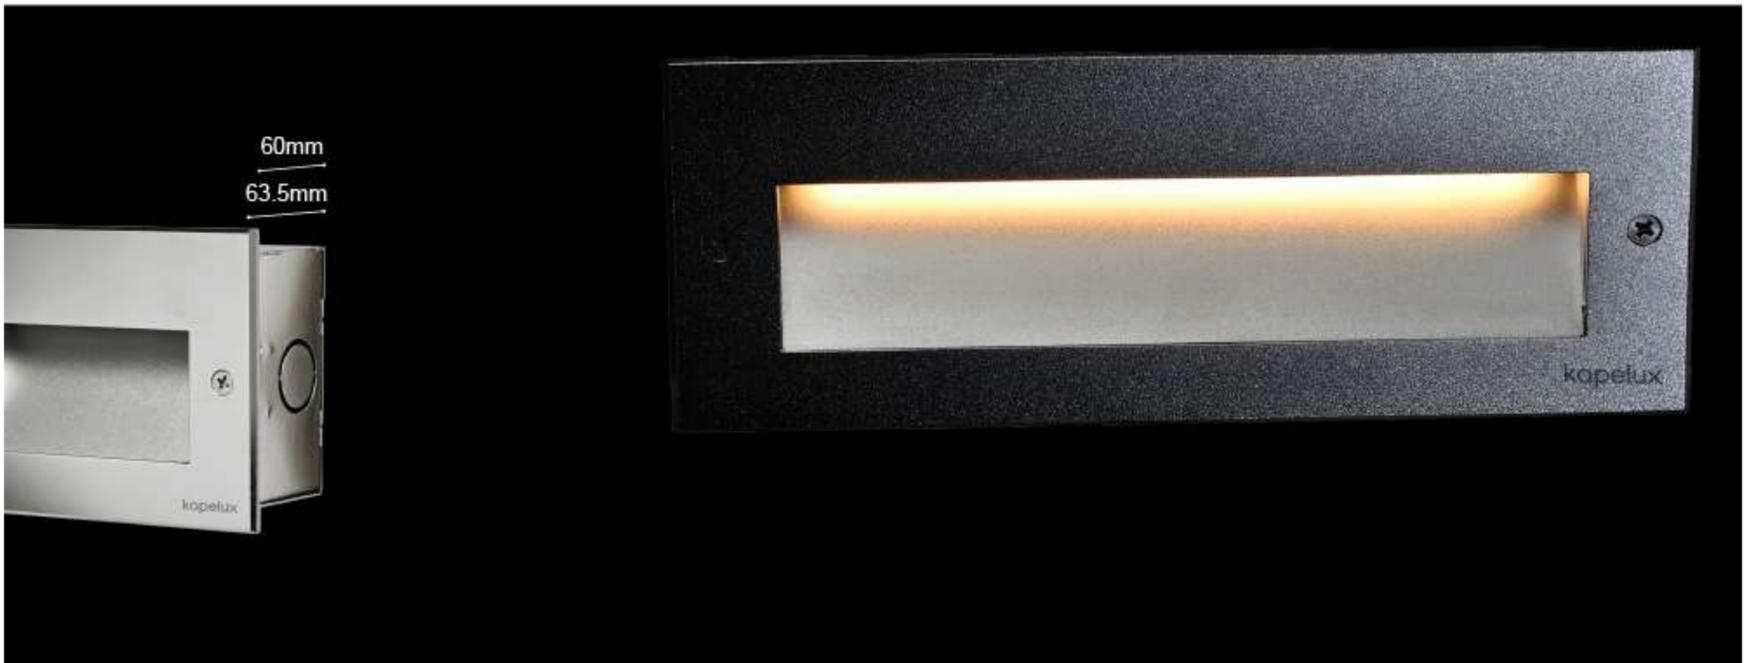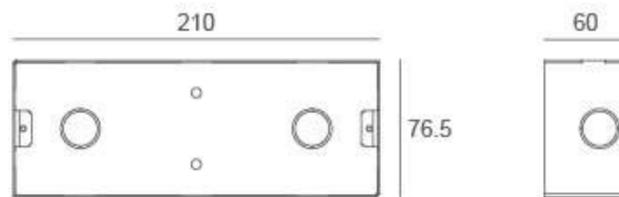

Photometric

12m	0.06 LUX
11m	
10m	0.08 LUX
9m	
8m	0.13 LUX
7m	
6m	0.22 LUX
5m	
4m	0.50 LUX
3m	
2m	2.02 LUX
1m	

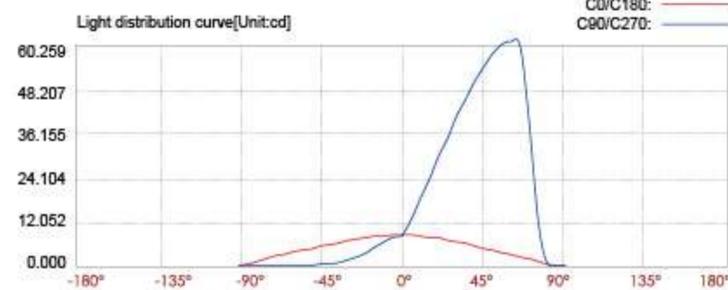

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	2.02 LUX	1.9m	4.8m
4m	0.50 LUX	3.8m	9.6m
6m	0.22 LUX	5.7m	14.4m
8m	0.13 LUX	7.6m	19.2m
10m	0.08 LUX	9.5m	24.0m
12m	0.06 LUX	11.4m	28.8m

Ver. Spread: 100.5 Hertz. Spread: 51.0