


01DRD5632

Linear Drawing

Light Source	56x0.07W
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=170 240V=18
Consumption (W)	24V/240V=4
Luminance (LM)	WW=32
IK	09

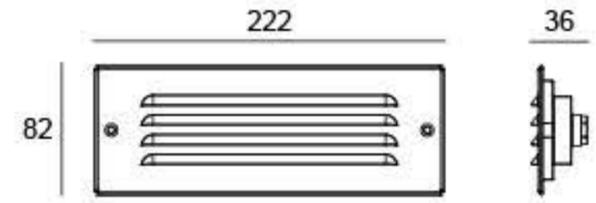

Unit: mm

Specification

Front Cover	SUS 316#
Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & flame resistant PC
LED Type	SMD
Cable Gland	IP 67
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2×1.0mm ² , L=0.5m,Low Voltage H05RN-F 3×1.0mm ² , L=0.5m,High Voltage
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Color Option



Gunstock Brown-Light
KAP03




Sanded Electrolysis SUS

Sleeve (Staninless Steel,Included)

SUS 202#





Sleeve 272#

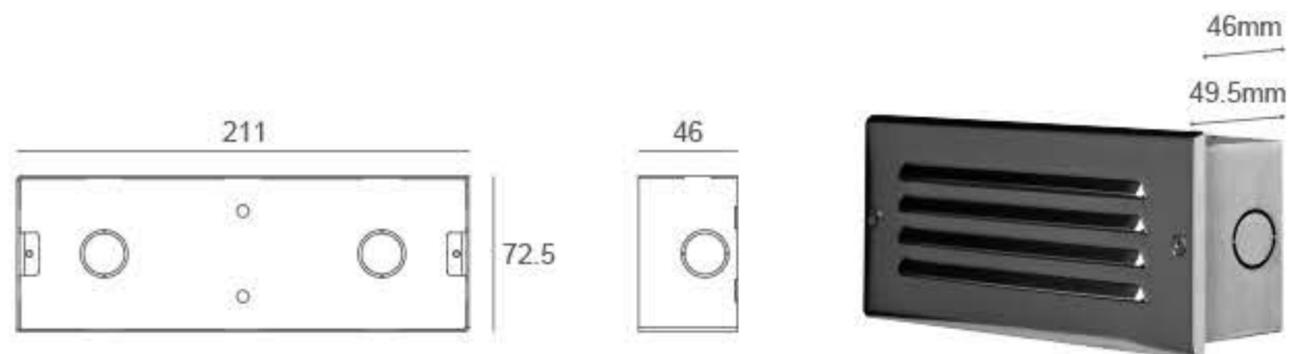

Photometric

12m	0.03 LUX
11m	
10m	0.05 LUX
9m	
8m	0.07 LUX
7m	
6m	0.13 LUX
5m	
4m	0.29 LUX
3m	
2m	1.17 LUX
1m	

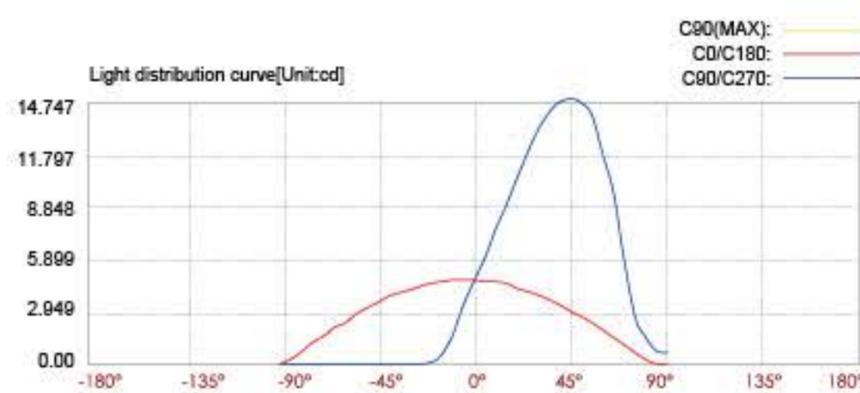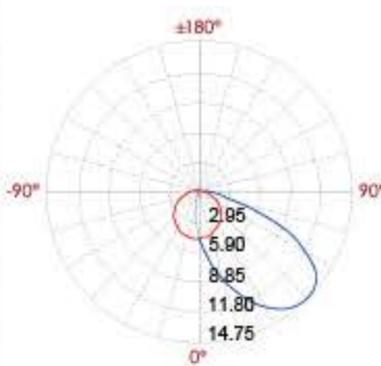

Center beam LUX	Beam width	
	V	H
2m 1.17 LUX	5.0m	2.2m
4m 0.29 LUX	10.1m	4.5m
6m 0.13 LUX	15.1m	6.7m
8m 0.07 LUX	20.2m	8.9m
10m 0.05 LUX	25.2m	11.1m
12m 0.03 LUX	30.3m	13.4m

Ver.Spread:103.3 Horiz.Spread:58.3