

## 01EBAB0129

Light Source	1x12W
Selected Degree(°)θ1/2	60°
Input Voltage (V)	AC 240
Operating Current (MA)	240V=66
Consumption (W)	240V=15
Luminance (LM)	WW=550
IK	05


### Specification

Front Cover	12# Die-casting RAL9005 powder coated aluminum T=60-80um,Adhesion of ISO class 1/ASTM class 4B
Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um,Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered Glass
Gasket	Waterproof silicone gasket
LED Type	COB
Operating Temperature	-20°C~40°C
Driver	Built in on/off driver
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 3x1.0mm <sup>2</sup> L=0.3m


### Sleeve



Sleeve 223#

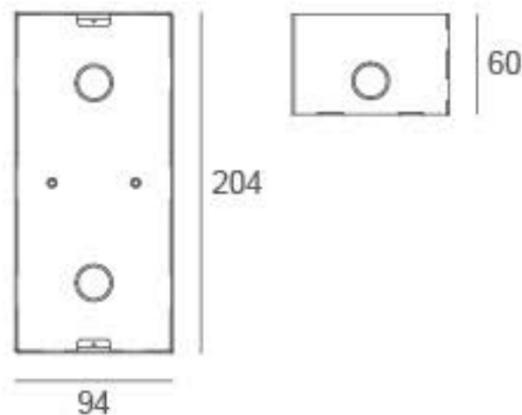

### Linear Drawing

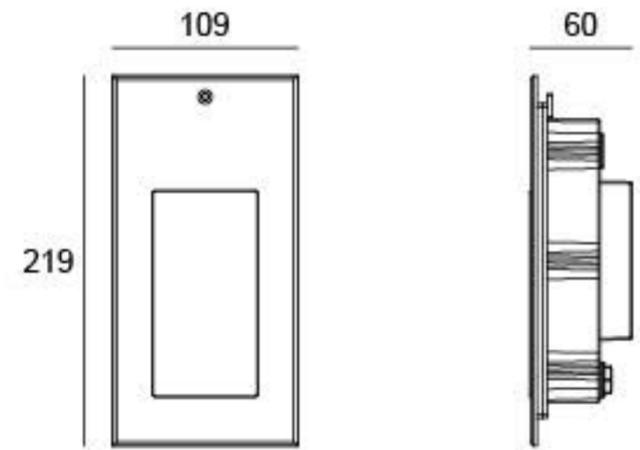

Unit: mm

### Painting Color

#### Primary



Sanded Dark Grey  
KAP 7037

#### Secondary



Sanded Black  
RAL 9005



Sanded Bronze  
KAP 7008

