


01EBC1235

Linear Drawing

Light Source	12x1W
Lens	C21
Selected Degree (°)θ1/2	90° x 39°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=583 240V=64
Consumption (W)	24V/240V=14
Luminance (LM)	WW=735
IK	10

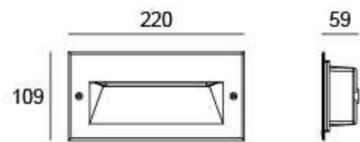


Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm², L=0.5m (24V) AC power: H05RN-F 3×1.0mm², L=0.5m (240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



C21

75° / 50°

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded Bronze
KAP 7008



Sanded White
RAL 9003

Sleeve



Sleeve 223#








Diagram Of Instruction

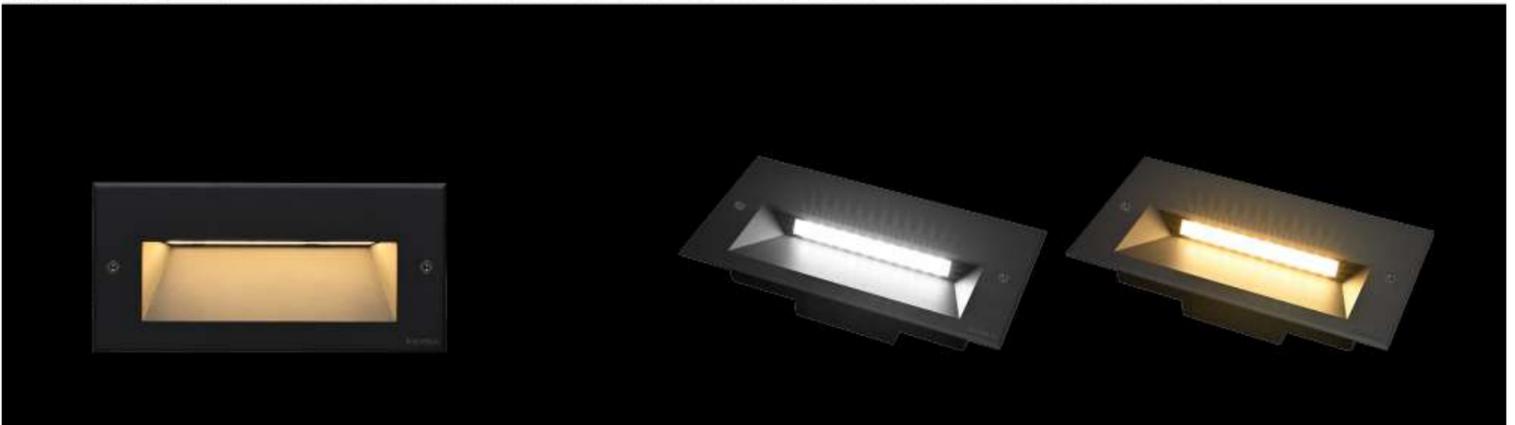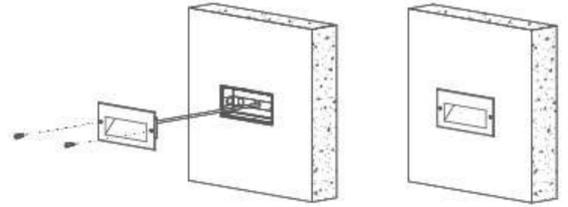


Photometric

12m	0.14 LUX
11m	
10m	0.20 LUX
9m	
8m	0.32 LUX
7m	
6m	0.56 LUX
5m	
4m	1.27 LUX
3m	
2m	5.07 LUX
1m	



Light distribution curve[Unit:cd]

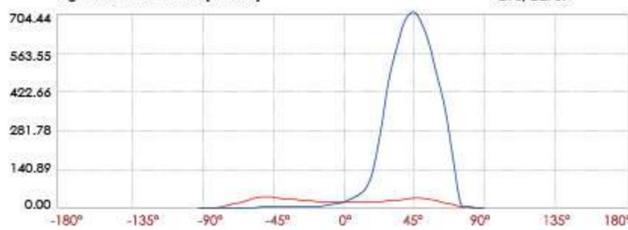

Lux distance curve

Center beam LUX	Beam width V	H
2m 5.07 LUX	4.0m	1.4m
4m 1.27 LUX	7.9m	2.8m
6m 0.56 LUX	11.9m	4.2m
8m 0.32 LUX	15.9m	5.6m
10m 0.20 LUX	19.8m	7.0m
12m 0.14 LUX	23.8m	8.4m