


01ECAB0169

Light Source	1x18W
Selected Degree(°)θ1/2	60°
Input Voltage (V)	AC 240
Operating Current (MA)	240V=89
Consumption (W)	240V=20
Luminance (LM)	WW=1100
IK	05


Specification

Front Cover	12# Die-casting RAL9005 powder coated aluminum T=60-80um,Adhesion of ISO class 1/ASTM class 4B
Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um,Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered Glass
Gasket	Waterproof silicone gasket
LED Type	COB
Operating Temperature	-20°C~40°C
Driver	Built in on/off driver
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 3×1.0mm² L=0.3m

Sleeve

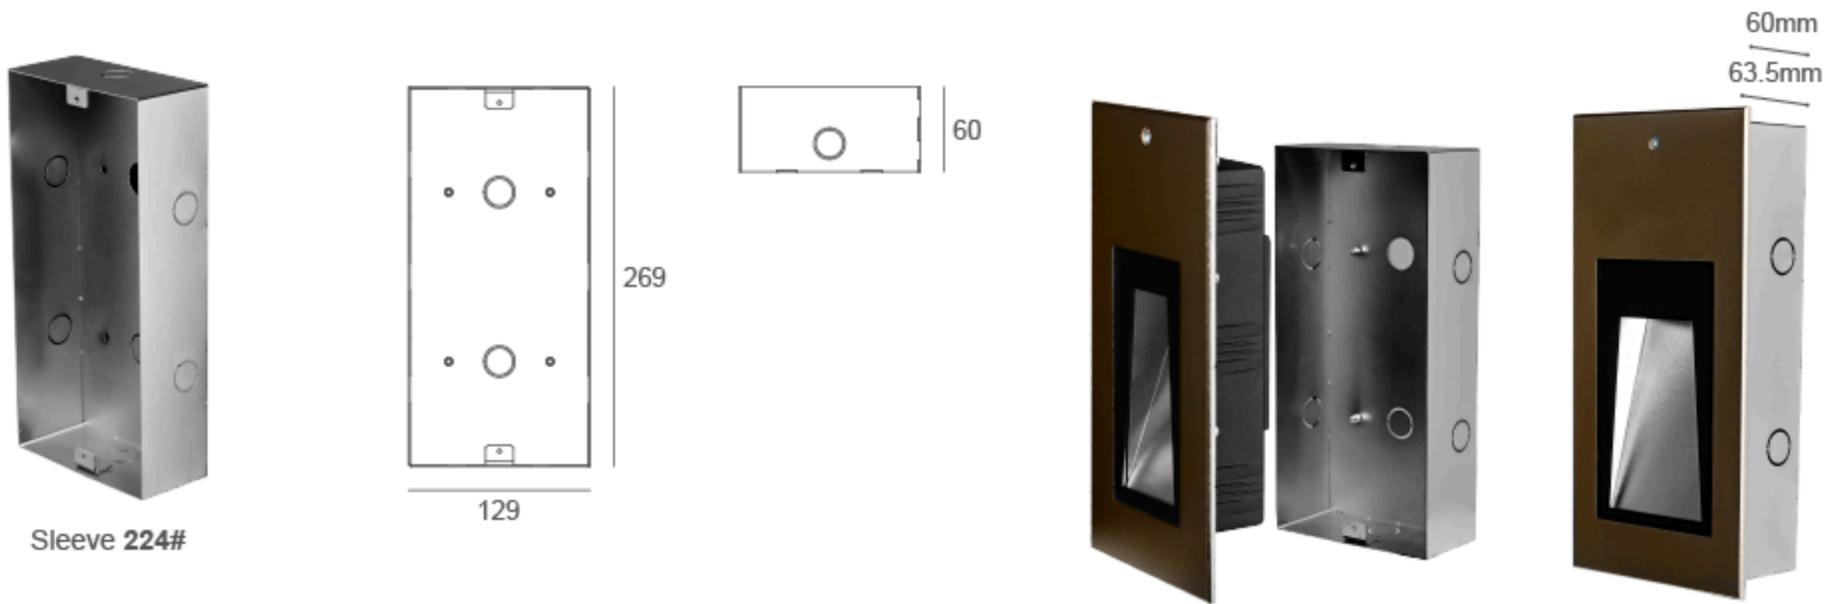

Linear Drawing

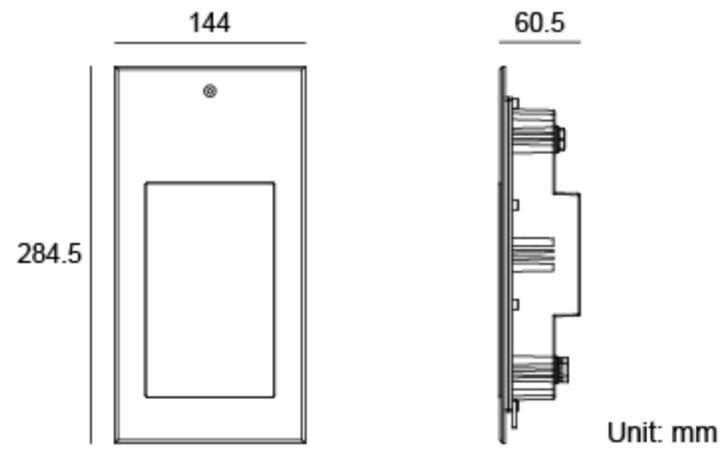

Painting Color

Primary



Sanded Dark Grey
KAP 7037

Secondary



Sanded Black
RAL 9005



Sanded Bronze
KAP 7008

