

## 01EJAD0127

|                        |          |
|------------------------|----------|
| Light Source           | 1x7W     |
| Selected Degree(°)θ1/2 | 45°      |
| Input Voltage (V)      | AC 240   |
| Operating Current (MA) | 240V=40  |
| Consumption (W)        | 240V=8.7 |
| Luminance (LM)         | WW=398   |
| IK                     | 05       |


### Specification

|                       |                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------|
| Front Cover           | 12# Die-casting RAL9005 powder coated aluminum<br>T=60-80um,Adhesion of ISO class 1/ASTM class 4B |
| Housing               | 12# Die-casting RAL9005 powder coated aluminum<br>T=60-80um,Adhesion of ISO class 1/ASTM class 4B |
| Light Window          | Tempered Glass                                                                                    |
| Gasket                | Waterproof silicone gasket                                                                        |
| LED Type              | COB                                                                                               |
| Operating Temperature | -20°C~40°C                                                                                        |
| Driver                | Built in on/off driver                                                                            |
| Power Cable           | Outside of luminaire (Without waterstopper)<br>H05RN-F 3×1.0mm <sup>2</sup> L=0.3m                |


### Sleeve



Sleeve 237#

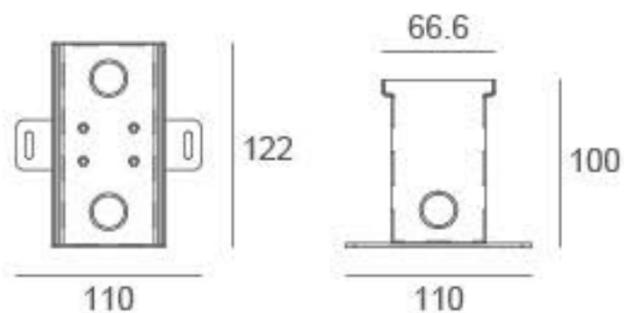

### Linear Drawing

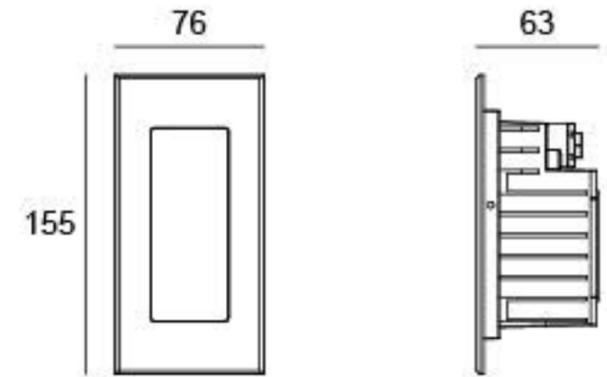

Unit: mm

### Painting Color

#### Primary



Sanded Dark Grey  
KAP 7037

#### Secondary



Sanded Black  
RAL 9005



Sanded Bronze  
KAP 7008

