

01GAD0334

Light Source	3x0.7W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=110 120V=48 240V=29
Consumption (W)	24V=2.6 120V/240V=3.1
Luminance (LM)	CW=39 WW=36
IK	10

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & flame resistant PC
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm², L=0.3m(24V) AC power: H05RN-F 3×1.0mm², L=0.3m(120V/240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Sleeve


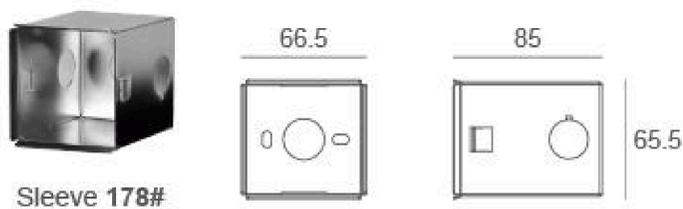




Diagram Of Instruction

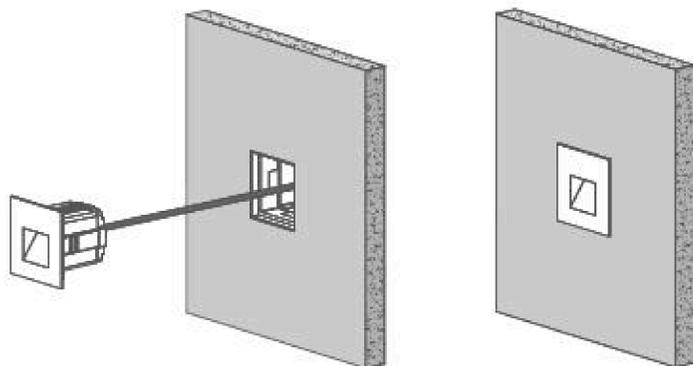

Photometric

12m	0.02 LUX
11m	
10m	
9m	0.03 LUX
8m	
7m	0.04 LUX
6m	0.08 LUX
5m	
4m	0.18 LUX
3m	
2m	0.70 LUX
1m	


01GAD0334 (3x0.7W)

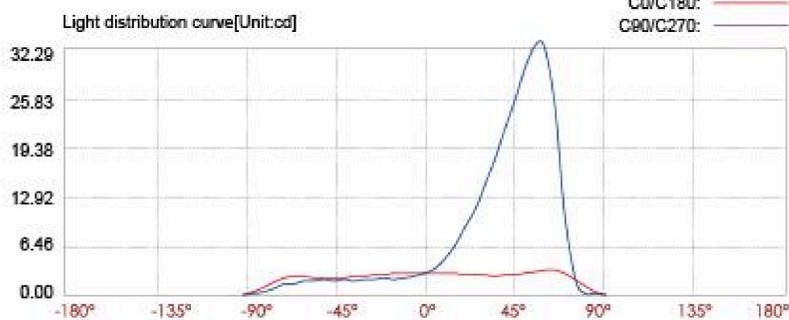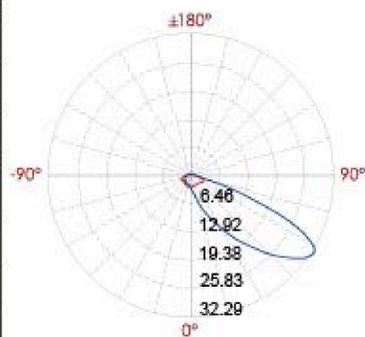

Center beam LUX	Beam width V	Beam width H
2m 0.70 LUX	2.0m	1.3m
4m 0.18 LUX	4.0m	2.5m
6m 0.08 LUX	6.0m	3.8m
8m 0.04 LUX	8.0m	5.1m
10m 0.03 LUX	10.0m	6.3m
12m 0.02 LUX	12.0m	7.6m

Ver.Spread:53.3 Horiz.Spread:35.1

Linear Drawing

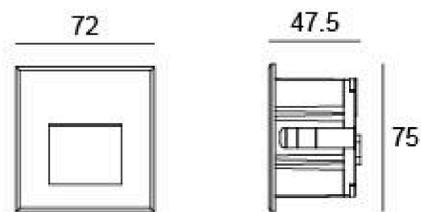

Unit: mm

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003

Features

Screwless front cover



Use the high-strength clips for fixation.
(please refer remark ①)