


01GBD0334

Light Source	3x0.7W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=110 120V=48 240V=29
Consumption (W)	24V=2.6 120V=3.0 240V=3.1
Luminance (LM)	CW=25 WW=22
IK	10

Linear Drawing

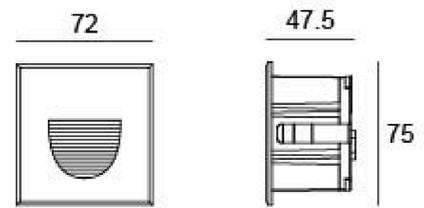

Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & flame resistant PC
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm ² , L=0.3m(24V) AC power: H05RN-F 3×1.0mm ² , L=0.3m(120V/240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary



Sanded Black
RAL 9005

Secondary




Sanded Dark Grey
KAP 7037




Sanded White
RAL 9003

Sleeve

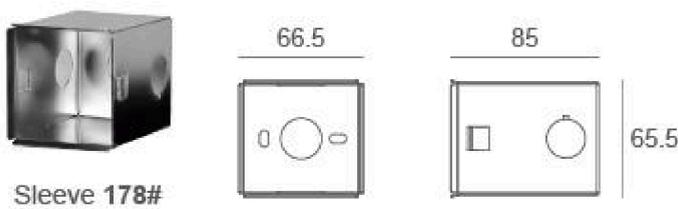


Features

Screwless front cover

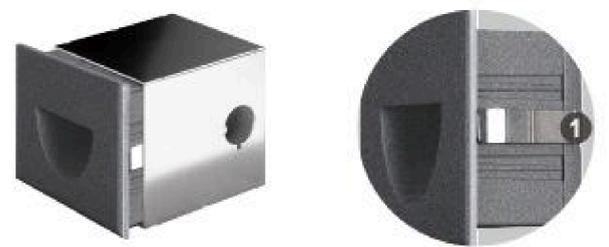

Use the high-strength clips for fixation.
(please refer remark ①)

Diagram Of Instruction

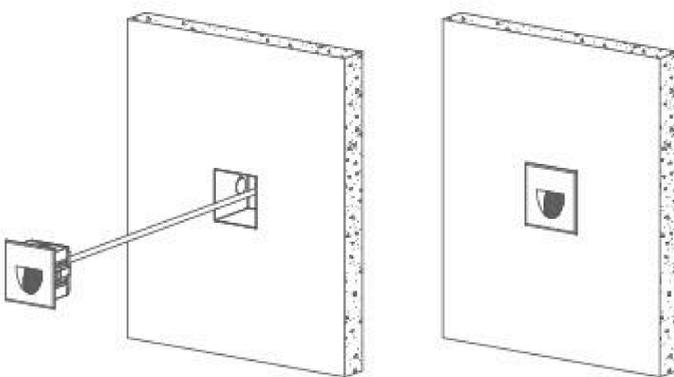

Photometric

12m	0.10 LUX
11m	
10m	0.14 LUX
9m	
8m	0.22 LUX
7m	
6m	0.39 LUX
5m	
4m	0.88 LUX
3m	
2m	3.50 LUX
1m	

01GBD0334 (3x0.7W)

