


**01GCC0657**

Light Source	6x1.8W
Lens	C20
Selected Degree (°)θ1/2	80° x 30°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=560 240V=60
Consumption (W)	24V=13.5 240V=12.5
Luminance (LM)	WW=482
IK	05

Linear Drawing

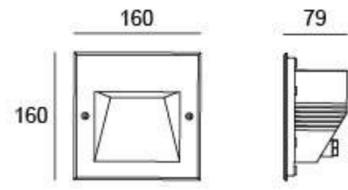

Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered Glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2x1.0mm², L=0.5m (24V) AC power: H05RN-F 3x1.0mm², L=0.5m (240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

LENS (Item Code)

Referenced Degree(°)θ1/2



C20

75° / 50°

Painting Color

Primary



Sanded Black  
RAL 9005

Secondary



Sanded Dark Grey  
KAP 7037



Sanded Bronze  
KAP 7008



Sanded White  
RAL 9003

Sleeve



Sleeve 258#




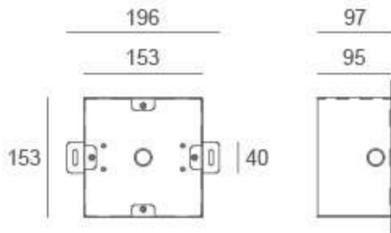


Diagram Of Instruction

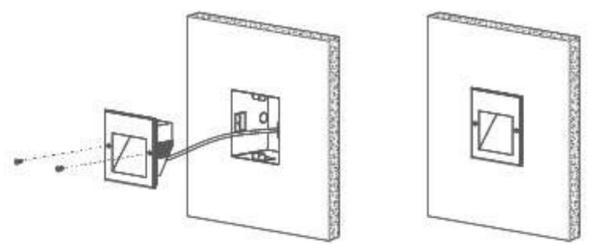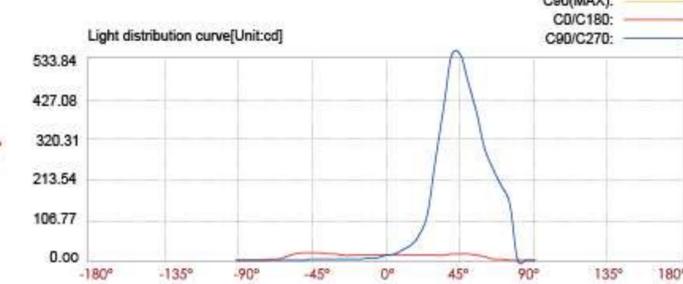

Photometric

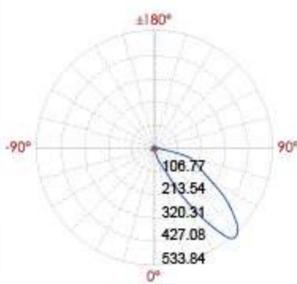

Lux distance curve

Center beam LUX	Beam width V	Beam width H
2m 3.02 LUX	3.4m	1.1m
4m 0.76 LUX	6.8m	2.3m
6m 0.34 LUX	10.3m	3.4m
8m 0.19 LUX	13.7m	4.5m
10m 0.12 LUX	17.1m	5.7m
12m 0.08 LUX	20.5m	6.8m

Ver.Spread:81.1 Horiz.Spread:31.7