


01GDC0658

Light Source	6x3W
Lens	C20
Selected Degree (°)θ1/2	86° x 42°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=850 240V=84
Consumption (W)	24V=20.4 240V=19
Luminance (LM)	WW=873
IK	05

Linear Drawing

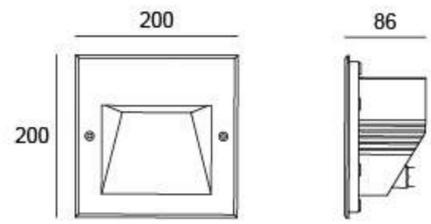

Unit mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered Glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm², L=0.5m (24V) AC power: H05RN-F 3×1.0mm², L=0.5m (240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



C20

75° / 50°

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded Bronze
KAP 7008



Sanded White
RAL 9003

Sleeve



Sleeve 221#


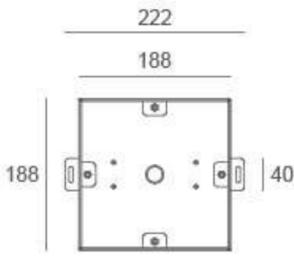


Diagram Of Instruction



Photometric

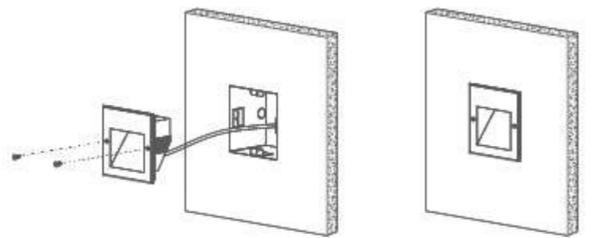