


01KAC1257

Light Source	12x1.35W
Lens	C22
Selected Degree (°)θ1/2	98° x 37°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=833 240V=82
Consumption (W)	24V=20 240V=18.8
Luminance (LM)	WW=800
IK	10

Linear Drawing

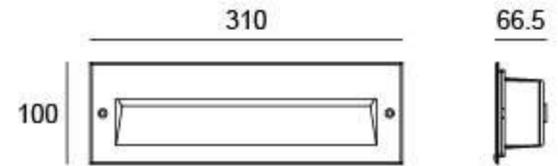


Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm², L=0.5m(24V) AC power: H05RN-F 3×1.0mm², L=0.5m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



C22

75° / 50°

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003

Sleeve



Sleeve 225#




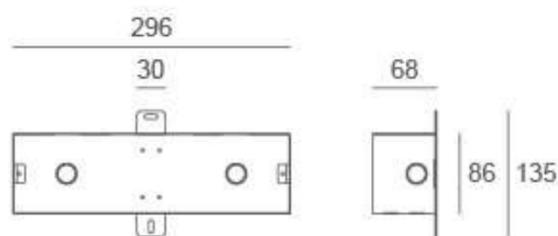


Diagram Of Instruction

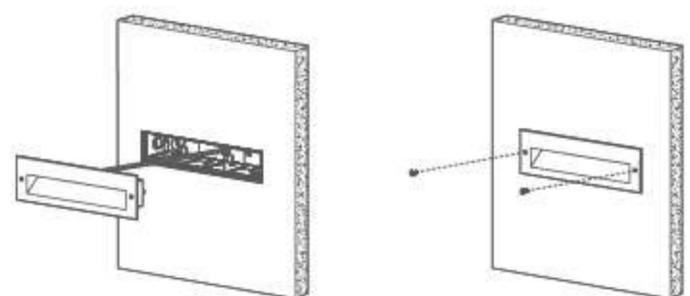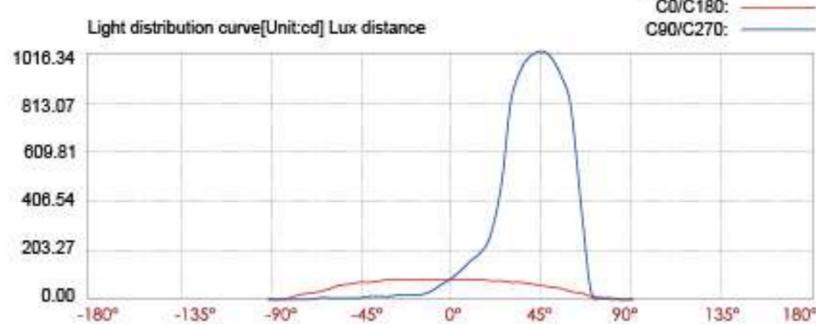

Photometric

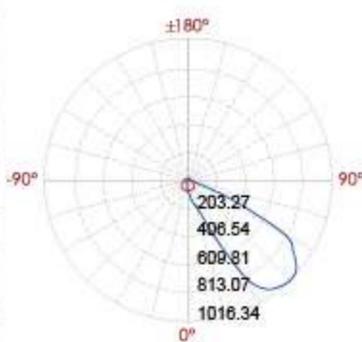

Lux distance curve

Illuminance at a distance

Center beam LUX	Beam width V	H
2m	4.6m	1.4m
4m	9.3m	2.7m
6m	13.9m	4.1m
8m	18.6m	5.4m
10m	23.2m	6.8m
12m	27.9m	8.2m

Ver.Spread:96.6 Horiz.Spread:37.6