


01KAC1257

Light Source	12x1.35W
Lens	C22
Selected Degree (°)θ1/2	98° x 37°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=833 240V=82
Consumption (W)	24V=20 240V=18.8
Luminance (LM)	WW=800
IK	10

Linear Drawing

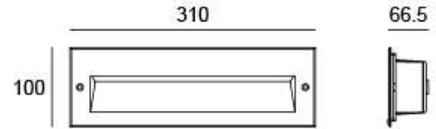


Unit: mm

Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered glass
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	Material SUS 202#
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm ² , L=0.5m(24V) AC power: H05RN-F 3×1.0mm ² , L=0.5m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



C22

75° / 50°

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003

Sleeve



Sleeve 225#




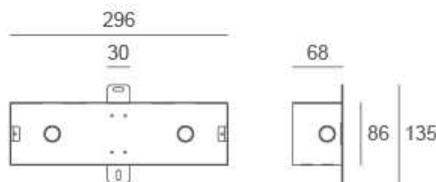


Diagram Of Instruction

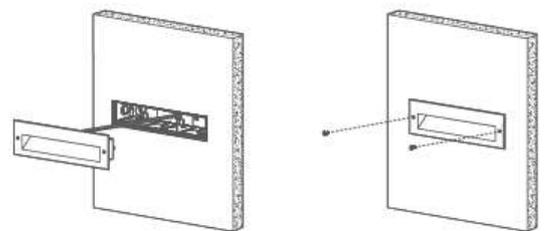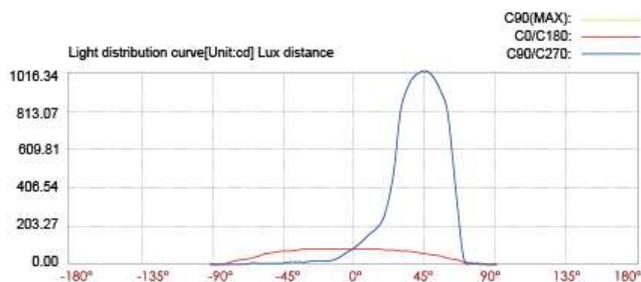

Photometric

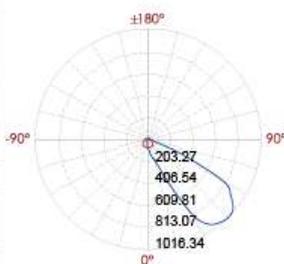

Lux distance curve

	Illuminance at a distance		Beam width	
	Center beam LUX	V	H	
2m	21.01 LUX	4.6m	1.4m	
4m	5.25 LUX	9.3m	2.7m	
6m	2.33 LUX	13.9m	4.1m	
8m	1.31 LUX	18.6m	5.4m	
10m	0.84 LUX	23.2m	6.8m	
12m	0.58 LUX	27.9m	8.2m	
Ver.Spread:98.6		Horiz.Spread:37.6		