


## 01KDD1234

Light Source	12x0.4W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 240
Operating Current (mA)	24V=250 240V=29
Consumption (W)	24V/240V=6
Luminance (LM)	WW=138
IK	09


### Specification

Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & flame resistant PC
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	PC/ABS ALLOYS 148# with iron bracket
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm <sup>2</sup> , L=0.3m(24V) AC power: H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request


### Sleeve

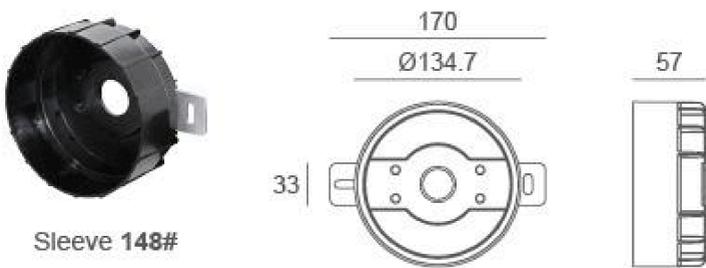

### Diagram Of Instruction

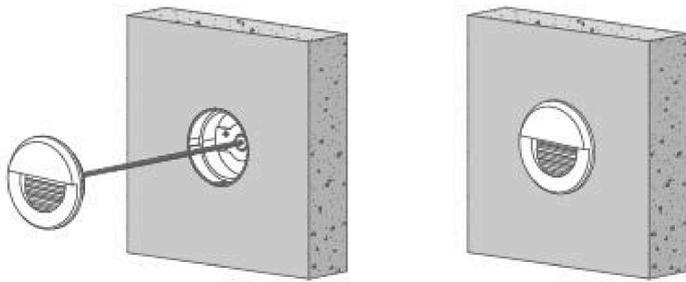

### Linear Drawing

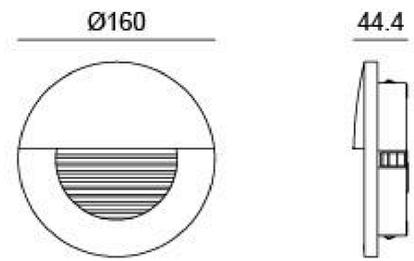

Unit: mm

### Painting Color

#### Primary




Sanded Black  
RAL 9005

#### Secondary



Sanded Dark Grey  
KAP 7037



Sanded White  
RAL 9003



Sanded Bronze  
KAP 7008

### Features

#### Screwless front cover



Use the high-strength clips for installation and extension.  
(please refer remark ① & ②)

