


01KED1234

Light Source	12x0.4W
Lens	N/A
Selected Degree (°)θ1/2	N/A
Input Voltage (V)	DC 24 AC 240
Operating Current (mA)	24V=250 240V=29
Consumption (W)	24V/240V=6
Luminance (LM)	WW=157
IK	09

Specification


Front Cover & Housing	12# Die-casting RAL9005 powder coated aluminum T=60-80um.Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & flame resistant PC
Gasket	Waterproof silicone gasket
Cable Gland	IP67
LED Type	SMD
Driver	Built in on/off driver
Recessed Sleeve	PC/ABS ALLOYS 148# with iron bracket
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) DC power: H05RN-F 2×1.0mm ² , L=0.3m(24V) AC power: H05RN-F 3×1.0mm ² , L=0.3m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Sleeve

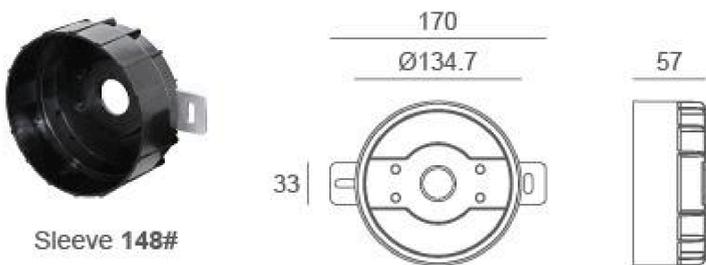


Sleeve 148#

Diagram Of Instruction

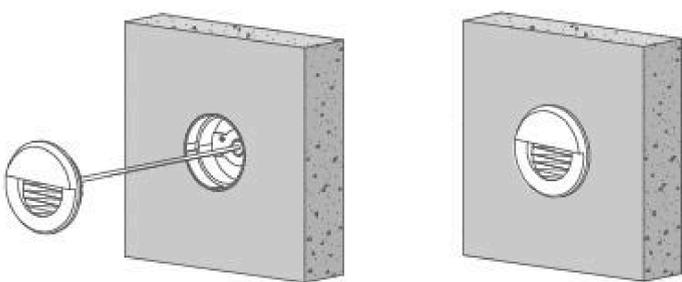

Linear Drawing

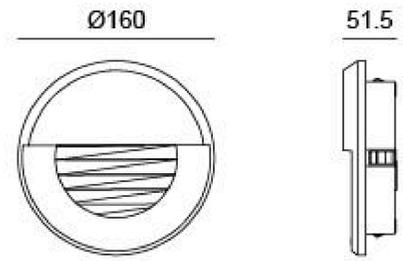

Unit: mm

Painting Color

Primary




Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded White
RAL 9003



Sanded Bronze
KAP 7008

Features

Screwless front cover



Use the high-strength clips for installation and extension.
(please refer remark **1** & **2**)

