


02BPRB0157B

Light Source	1x1.5W
Lens	B15
Selected Degree (°)θ1/2	20°
Input Voltage (V)	DC 24
Operating Current (MA)	24V=83
Consumption (W)	24V=2
Luminance (LM)	WW=136
IK	06

Linear Drawing

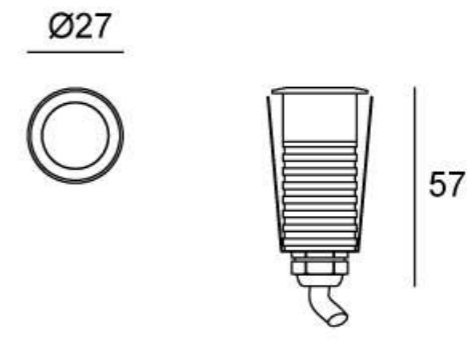

Unit: mm

Specification

Housing	Aluminum anodized finishing or powder Painting
Front Cover	SUS 304#, Hard chrome-plated
Light Window	Tempered step glass.T=2mm
Glass Pressure Capacity	503kgs
Operating Temperature	-20°C~40°C
Gasket	Silicon rubber molding shaped seal
Sleeve	PC/ABS Alloys
Lens	Optical Lens efficiency≥85%
LED Type	SMD
LED Driver	Built in on/off driver
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.5m

Lens (Item Code)

Referenced Degree(°)θ1/2



B15

10° 15° 20° 30° 10°x33°

Water Proof Solution



A Water-Stopper(Included)


The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable. Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.

B IP67 Jiffy quick plug/socket connector(Optional)

Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable. It is also the most IP-rating securing device for wiring.


Sleeve

Optional 1

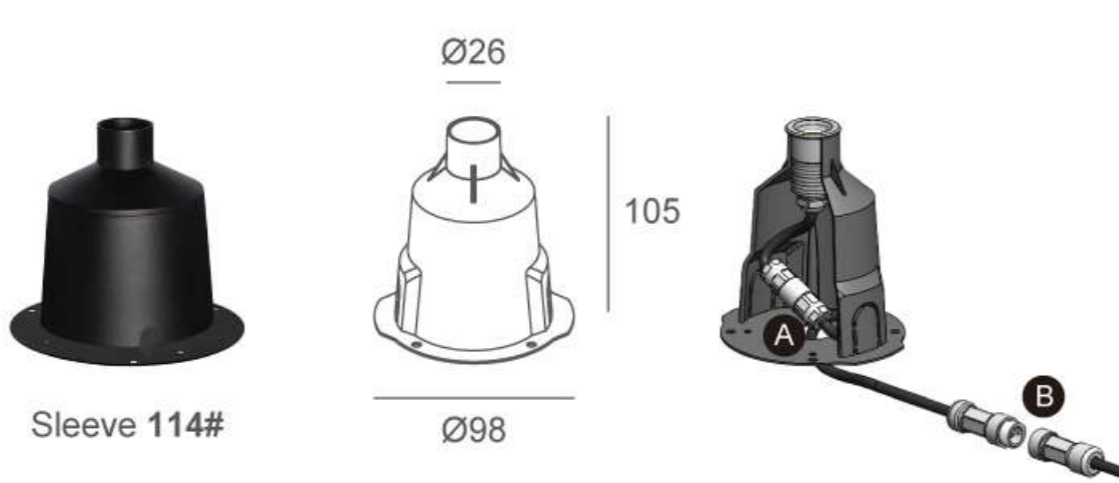

Sleeve 114#

Optional 2

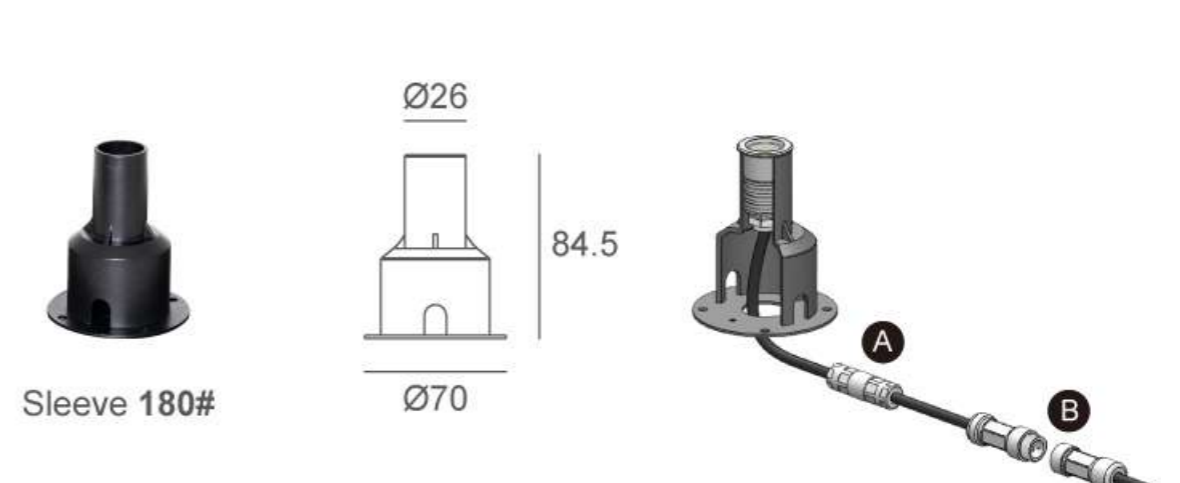

Sleeve 180#

Compact and exquisite



it fully demonstrates Kapelux's manufacturing craftsmanship. Its shape is small, elegant and neat, yet its functionality is not compromised in the slightest. When it needs to illuminate the target, it shines like a pearl.



1mm
Ultra-thin front cover

Photometric

12m	5.77 LUX
11m	
10m	8.31 LUX
9m	
8m	12.98 LUX
7m	
6m	23.07 LUX
5m	
4m	51.92 LUX
3m	
2m	207.67 LUX
1m	

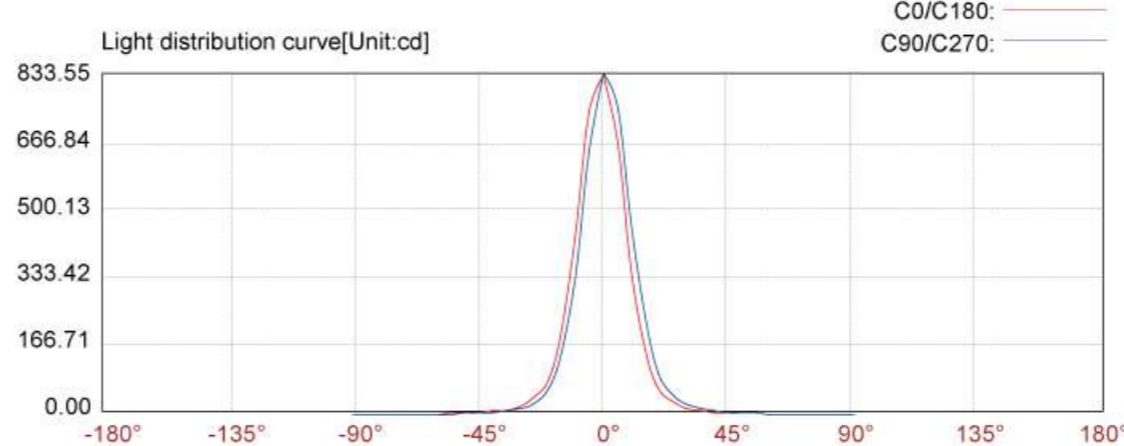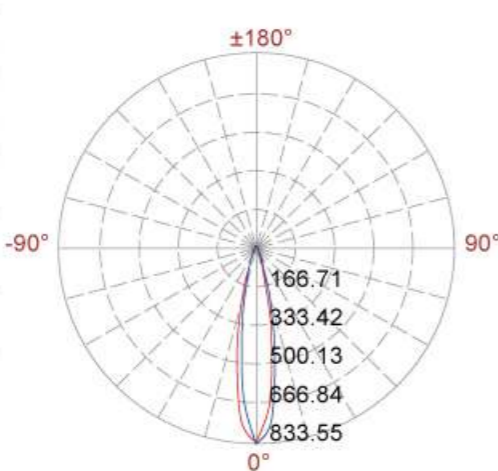

Lux distance curve

Center beam LUX	Illuminance at a distance	
	Beam width V	Beam width H
2m	207.67 LUX	0.7m 0.7m
4m	51.92 LUX	1.4m 1.4m
6m	23.07 LUX	2.1m 2.1m
8m	12.98 LUX	2.7m 2.8m
10m	8.31 LUX	3.4m 3.5m
12m	5.77 LUX	4.1m 4.2m