


02RLBC1257

Light Source	12×1.5W
Lens	C8
Selected Degree (°)θ1/2	45°/35°
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=910 120V=143 240V=79
Consumption (W)	24V=22 120V=17 240V=17.5
Luminance (LM)	VW=1302
IK	07

Linear Drawing

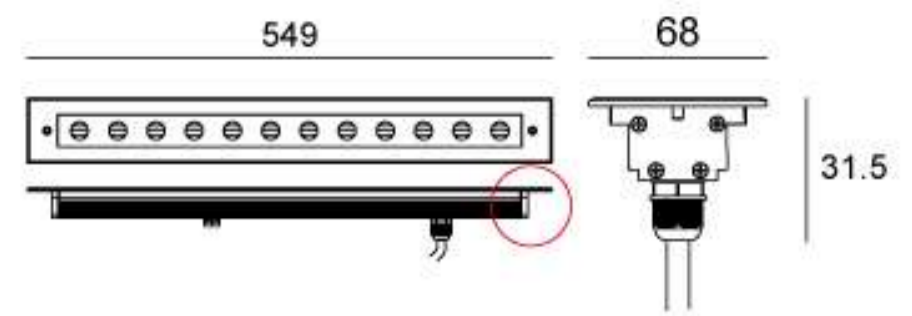

Unit: mm

Specification

Housing	Extruded aluminum, powder coated
Front Cover	SUS 316L#, Hard chrome-plated
Light Window	Tempered glass, T=6mm
Glass Pressure Capacity	5080kgs
Cable Gland	IP68 PG-9 PA66
Operating Temperature	-20°C~40°C
Gasket	Glass and Housing are silicone seaLED Type
Sleeve	Powder Coated Aluminum
Lens	Optical Lens, efficiency≥85%
LED Type	SMD
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2X1.0mm ² L=0.5m(24V) H05RN-F 3X1.0mm ² L=0.5m(120V/240V)
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



C8

45°/35°

Water Proof Solution



- A Water-Stopper(Included)**
The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable. Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.
- B IP67 Jiffy quick plug/socket connector(Optional)**
Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable. It is the also the most IPrating securing device for wiring.

Sleeve



Sleeve 137#

