


## 02RLBC2457

Light Source	24×1.5W
Lens	C8
Selected Degree (°)θ1/2	45°/35°
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=1823 120V=312 240V=156
Consumption (W)	24V=44 120V=36 240V=36
Luminance (LM)	WW=2114
IK	07

## Linear Drawing

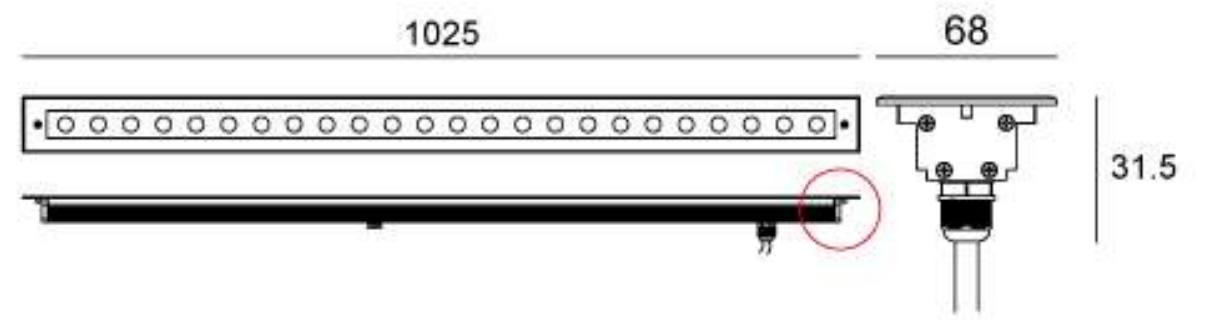

Unit: mm

## Specification

Housing	Extruded aluminum, powder coated
Front Cover	SUS 316L#, Hard chrome-plated
Light Window	Tempered glass. T=6mm
Glass Pressure Capacity	5080kgs
Cable Gland	IP68 PG-9 PA66
Operating Temperature	-20°C~40°C
Gasket	Glass and Housing are silicone seaLED Type
Sleeve	Powder Coated Aluminum
Lens	Optical Lens. efficiency≥85%
LED Type	SMD
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2X1.0mm <sup>2</sup> L=0.5m(24V) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m(120V/240V)
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request

## Lens (Item Code)

Referenced Degree(°)θ1/2



C8

45°/35°

## Water Proof Solution



### A Water-Stopper(Included)

The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable. Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.

### B IP67 Jiffy quick plug/socket connector(Optional)

Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable. It is the also the most IP rating securing device for wiring.

## Sleeve

