


**02RLBD9634**

Linear Drawing

Light Source	96×0.3W
Lens	N/A
Selected Degree (°)θ1/2	120°
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=1108 120V=212 240V=107
Consumption (W)	24V=26.5 120V=24 240V=24.5
Luminance (LM)	WW=800
IK	07

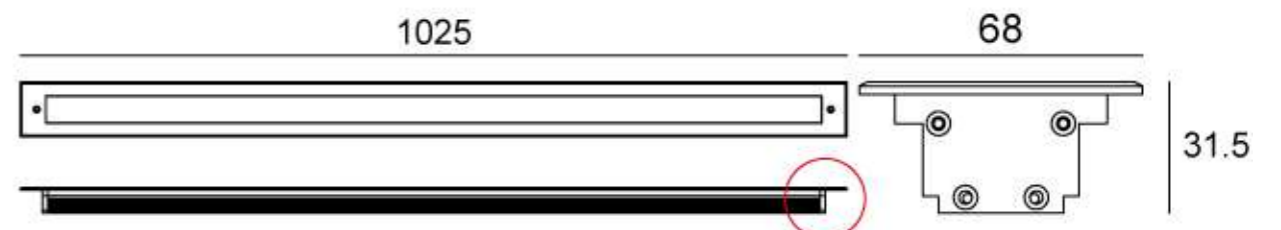

Unit: mm



Specification

Housing	Extruded aluminum, powder coated
Front Cover	SUS 316#, Hard chrome-plated
Light Window	Tempered glass.T=6mm
Glass Pressure Capacity	5080kgs
Cable Gland	IP68 PG-9 PA66
Operating Temperature	-20°C~40°C
Sleeve	Powder Coated Aluminum 137# 138#
LED Type	SMD
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2X1.0mm2 L=0.5m(24V) H05RN-F 3X1.0mm2 L=0.5m(120V/240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Water Proof Solution



Sleeve

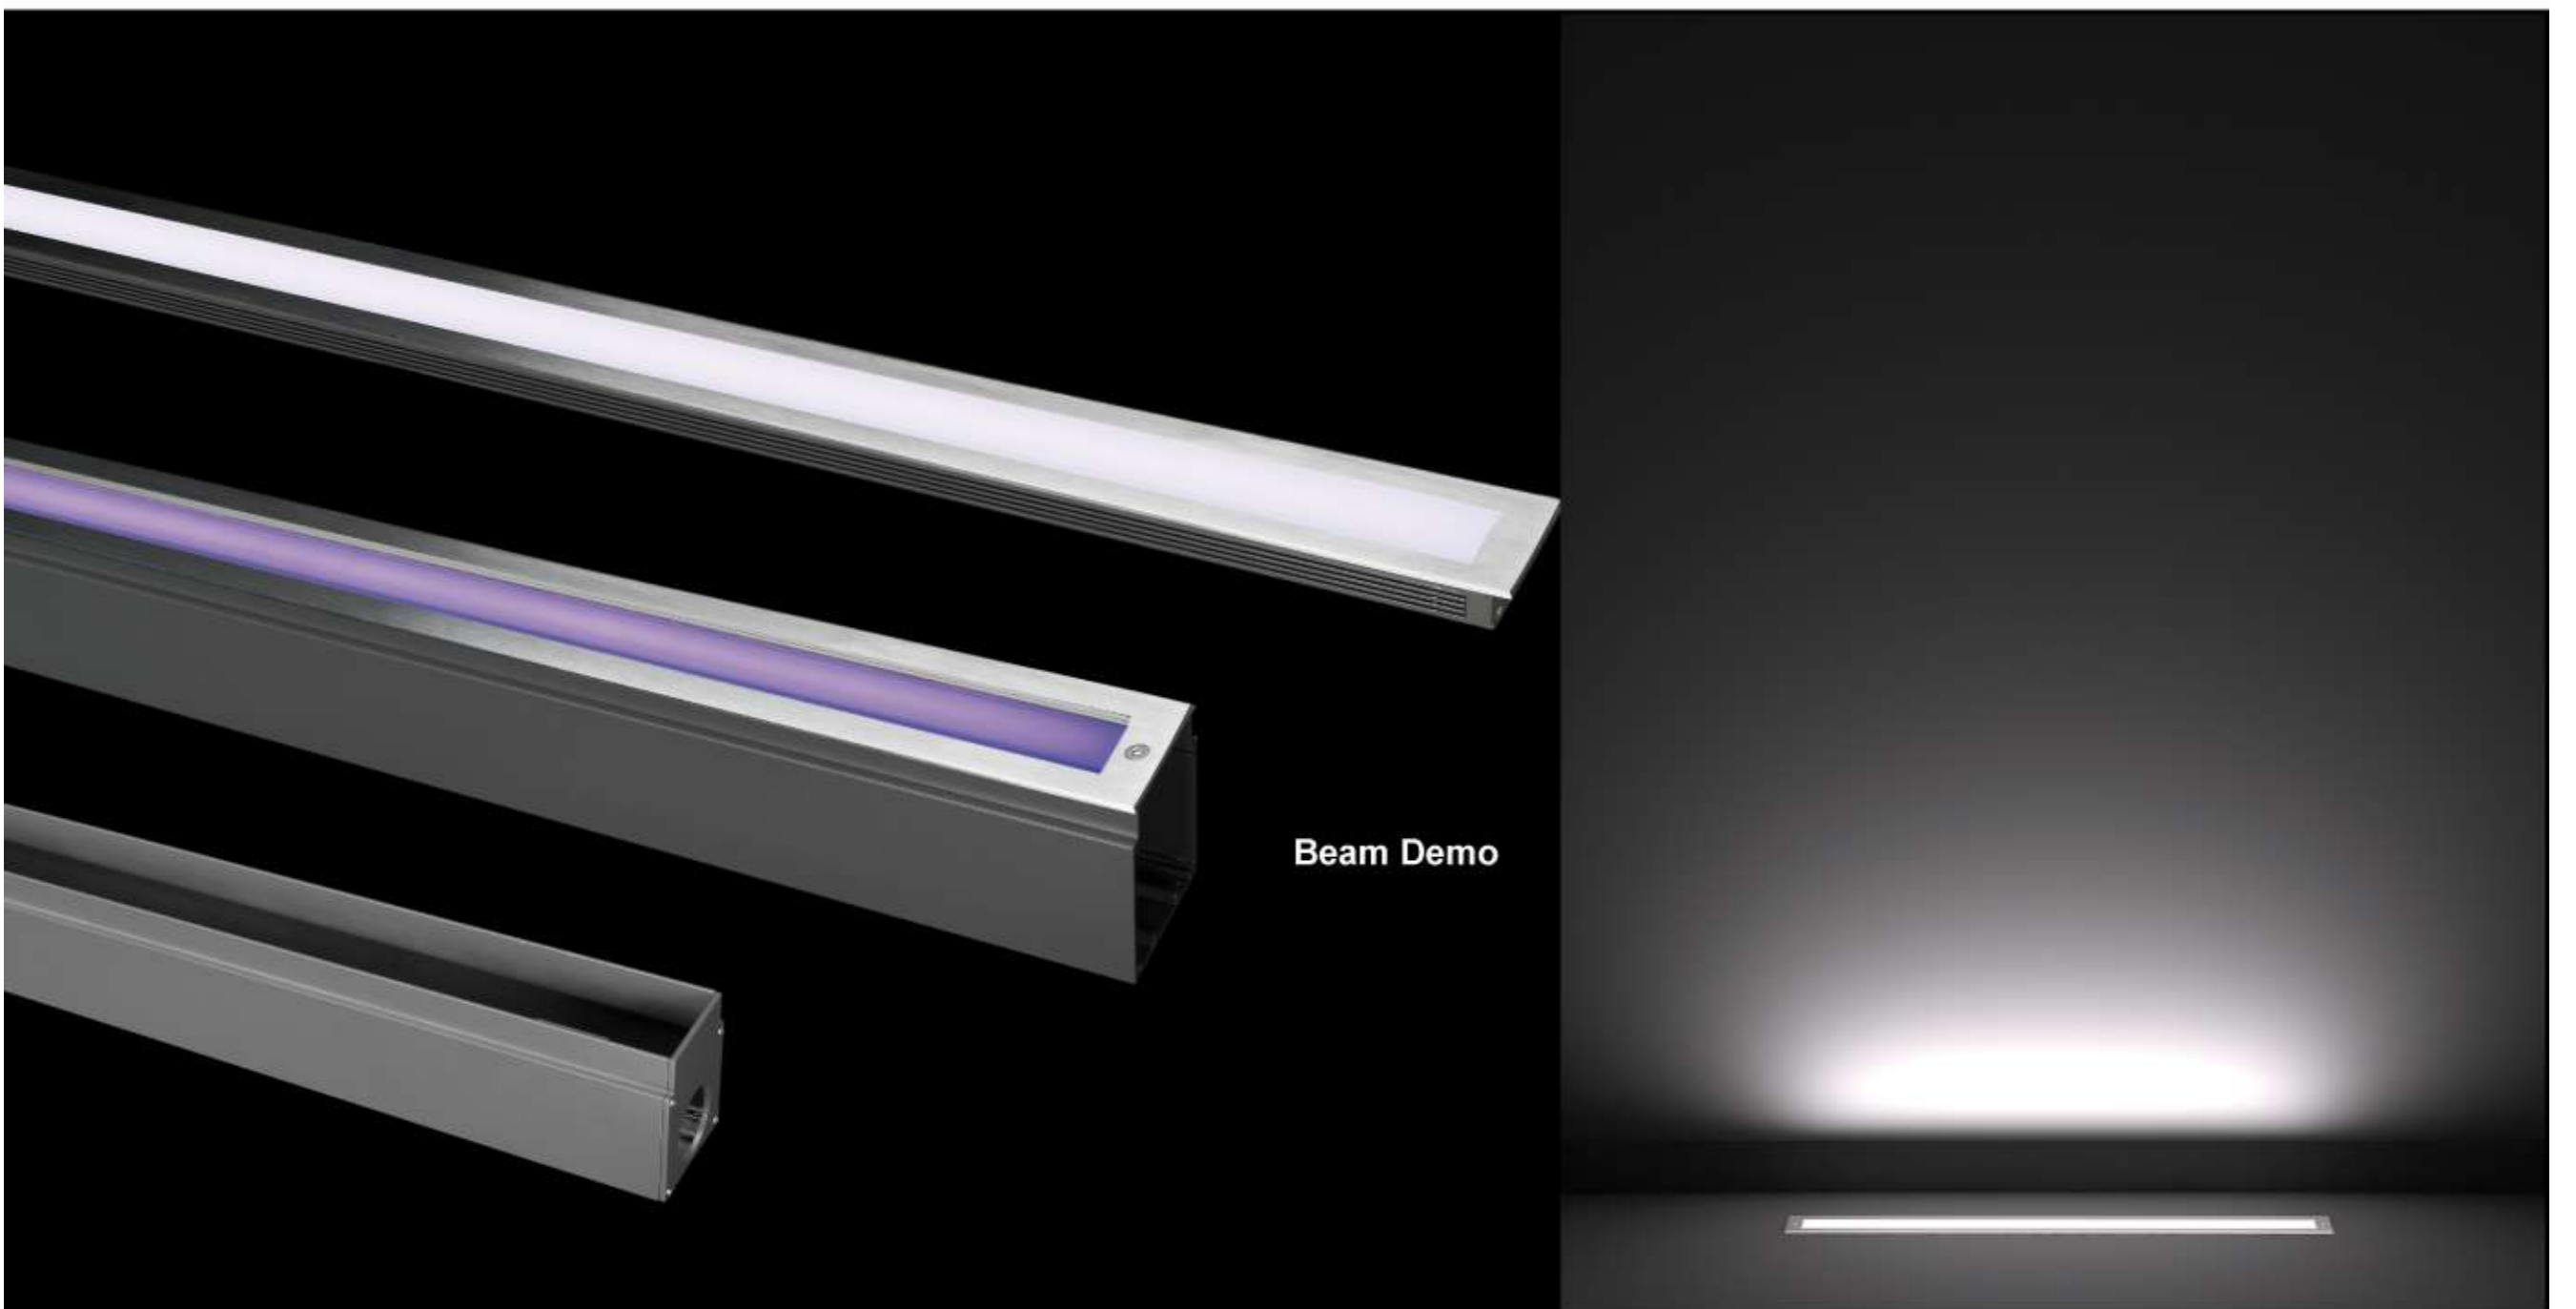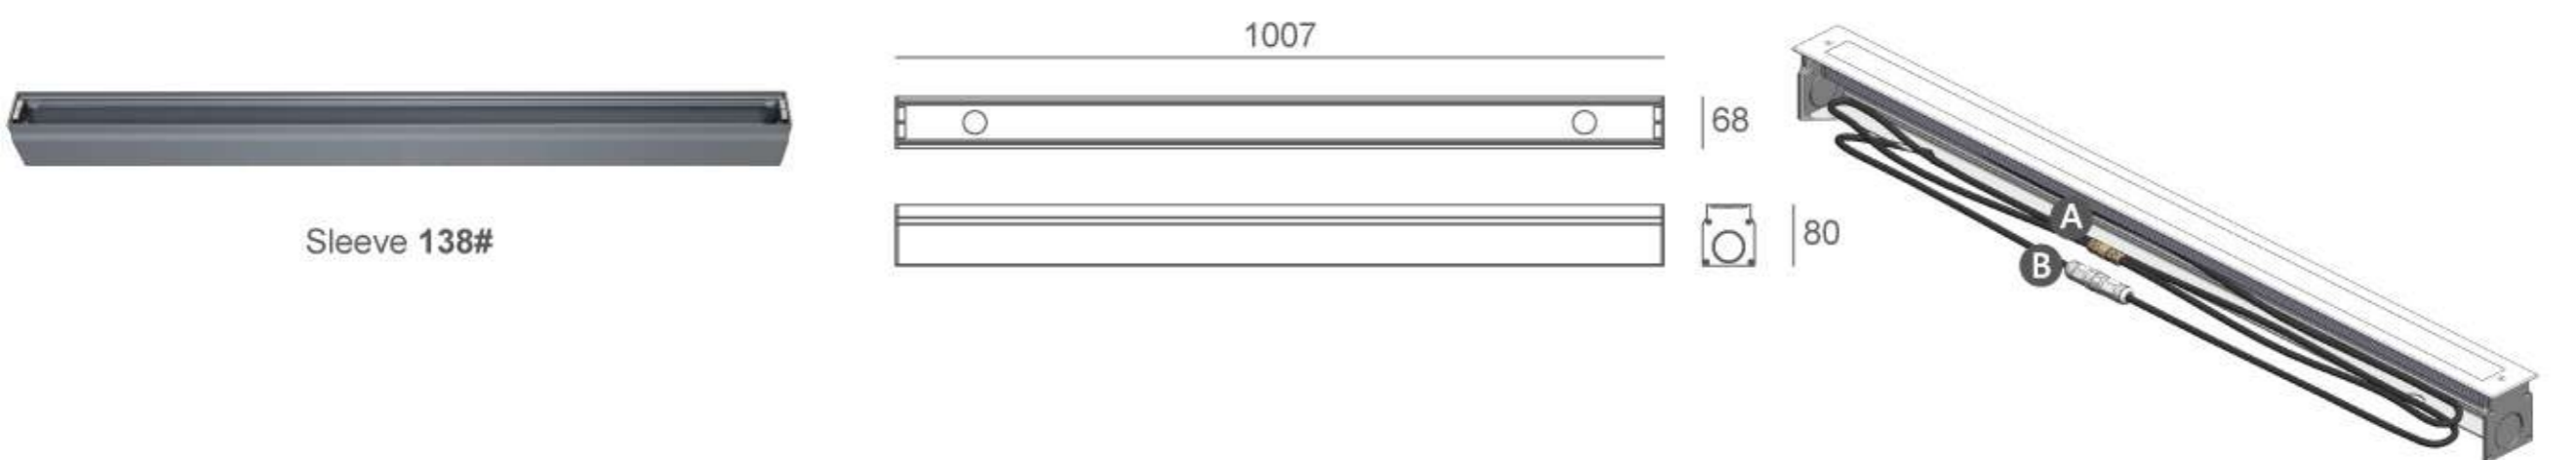

Photometric

