02RQCB4856

Light Source	48x0.7W
Selected Degree (°)θ1/2	30°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1583 240V=197
Consumption (W)	24V=38 240V=45
Luminance (LM)	WW=1611
IK	09

Linear Drawing

Low Voltage

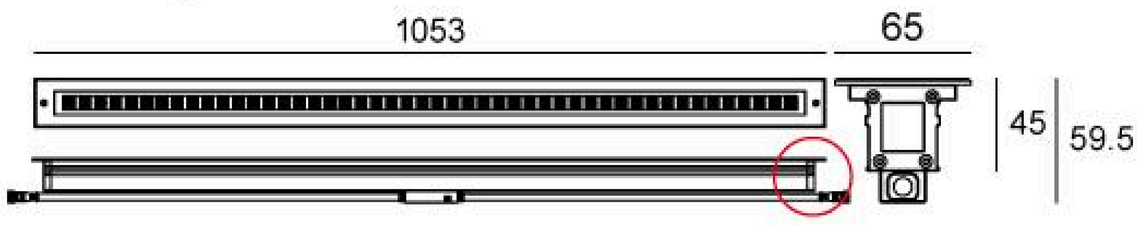

High Voltage

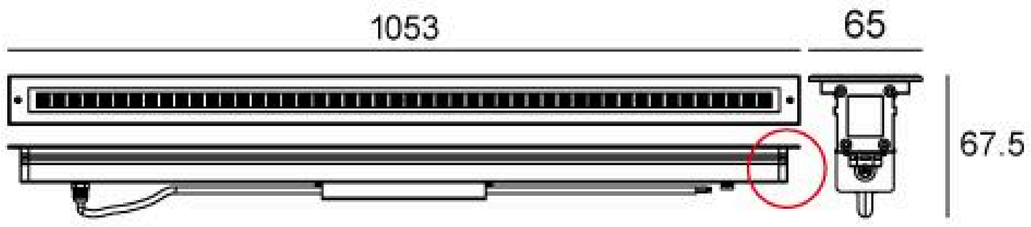

Unit: mm

Specification

Front Cover	SUS 316L#
Housing	Extruded aluminum with corrosion
Light Window	Tempered glass.T=6mm
LED Type	SMD
PCB	Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk
Gasket	Glass and housing are silicone sealed
LED Driver	Built in on/off driver
Power Cable	Outside of luminaire (Without waterstopper) 24V: H07RN-F 2×1.5mm² L=1.2m 240V: H05RN-F 3×1.0mm² L=0.3m
Mounting Sleeve	Powder Coated Aluminum
Glass Pressure Capacity	2524kgs
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request
Operating Temperature	-20˚C~40˚C

Effective Beam Angle

30° 25°x40°

Sleeve

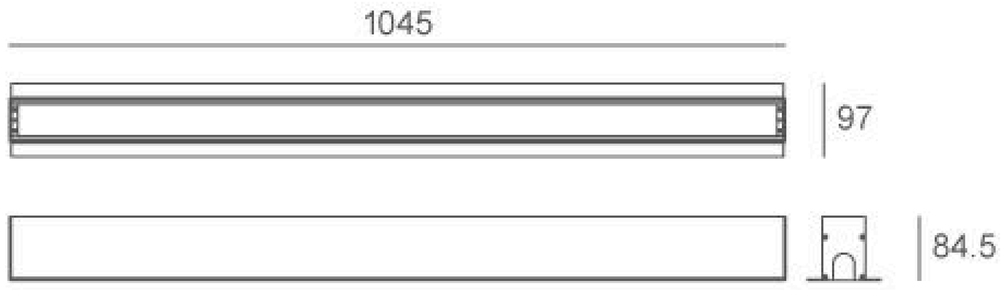

Sleeve **275#**

Water Proof Solution

Low voltage

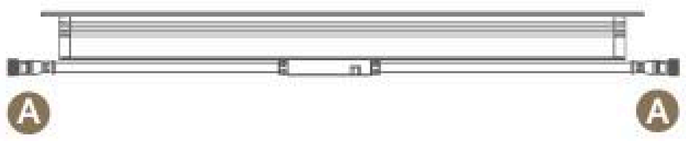

A **IP67 Jiffy quick plug/socket connector**(Included)

High voltage

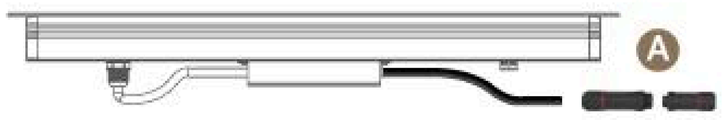
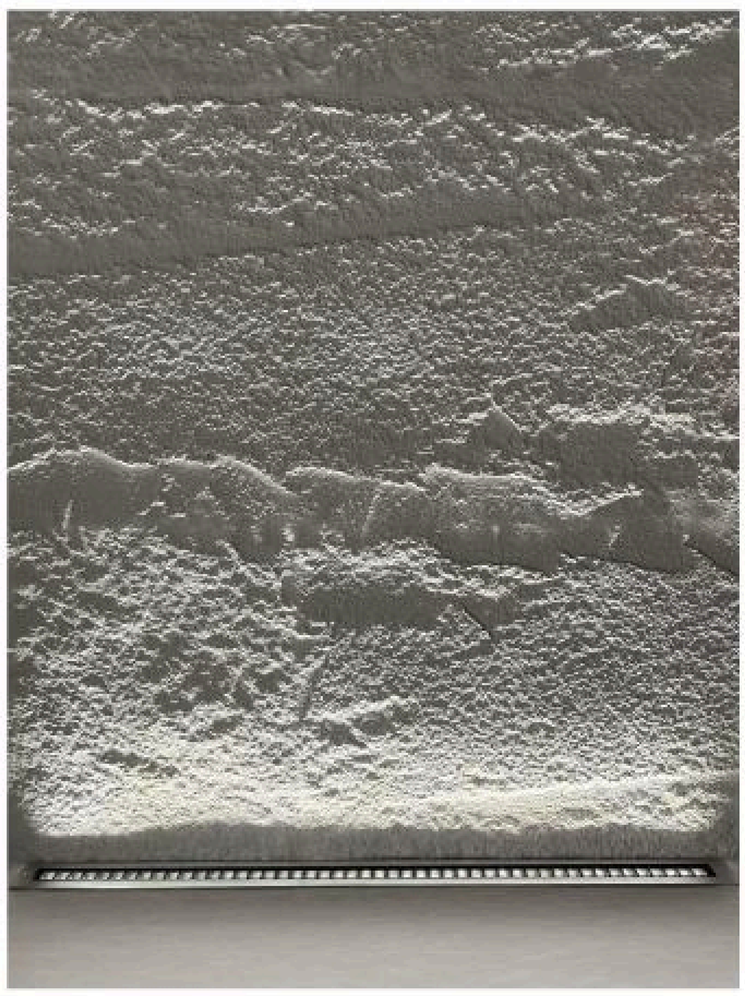
A **IP67 Jiffy quick plug/socket connector**(Option)