

02SKB0957


| | |
|-------------------------|-----------------|
| Light Source | 9x1.5W |
| Selected Degree (°)θ1/2 | 30° |
| Input Voltage (V) | DC 24 AC 240 |
| Operating Current (MA) | 24V=625 240V=87 |
| Consumption (W) | 24V=15 240V=18 |
| Luminance (LM) | WW=864 |
| IK | 10 |

Specification

| | |
|-------------------------|---|
| Housing | Extruded aluminum with corrosion |
| Light Window | Tempered glass.T=8mm |
| LED Type | SMD |
| PCB | Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk |
| Gasket | Glass and housing are silicone sealed |
| LED Driver | Built in on/off driver |
| Power Cable | Outside of luminaire (Without waterstopper) 24V: H07RN-F 2×1.5mm ² L=0.4m 240V:H05RN-F 3×1.0mm ² L=0.3m |
| Mounting Sleeve | Risistance painting |
| Glass Pressure Capacity | 2524kgs |
| Dimming Support | External DALI supported TRIAC, 0-10V, PWM via external driver on request |
| Operating Temperature | -20°C~40°C |


Water Proof Solution

Low voltage

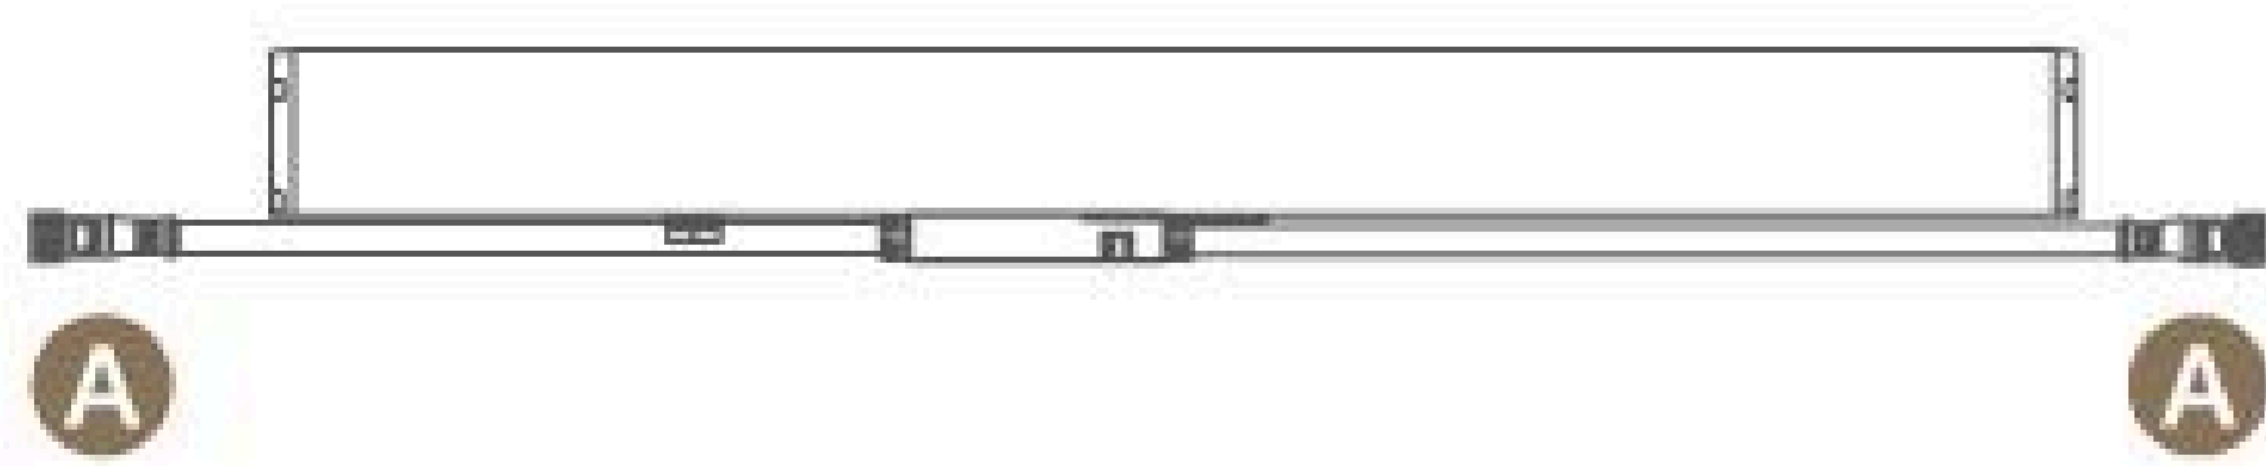

A IP67 Jiffy quick plug/socket connector(Included)


High voltage

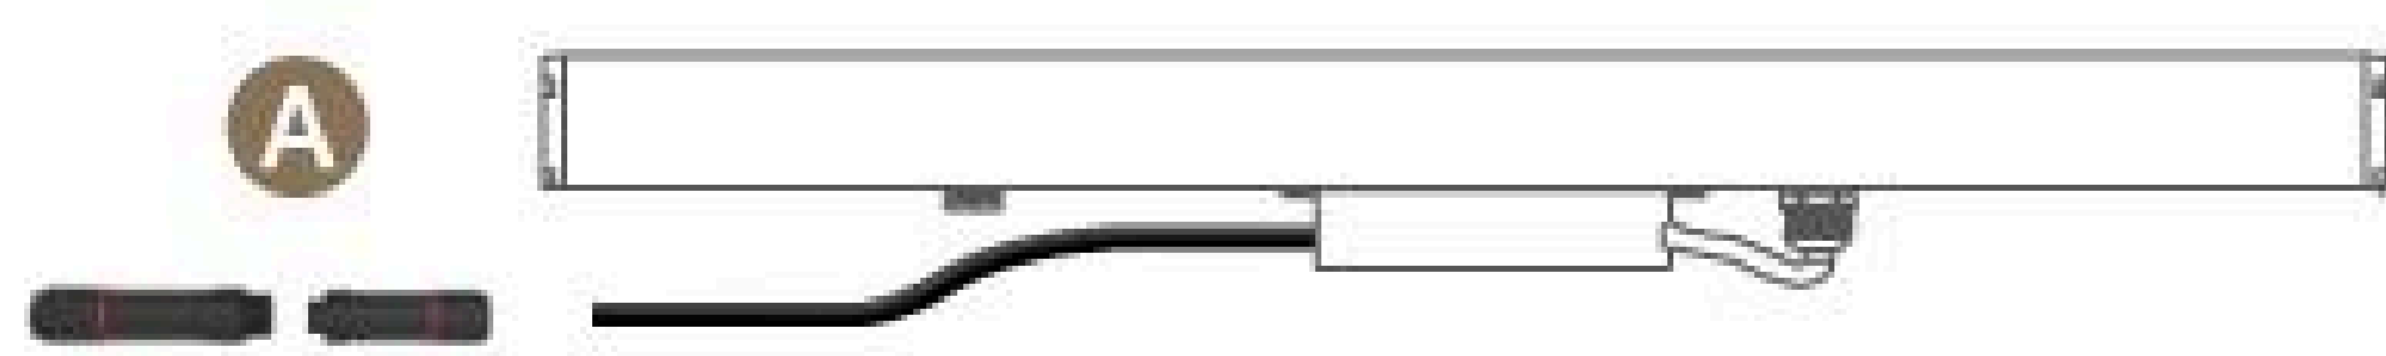


A IP67 Jiffy quick plug/socket connector(Option)

Linear Drawing

Low Voltage

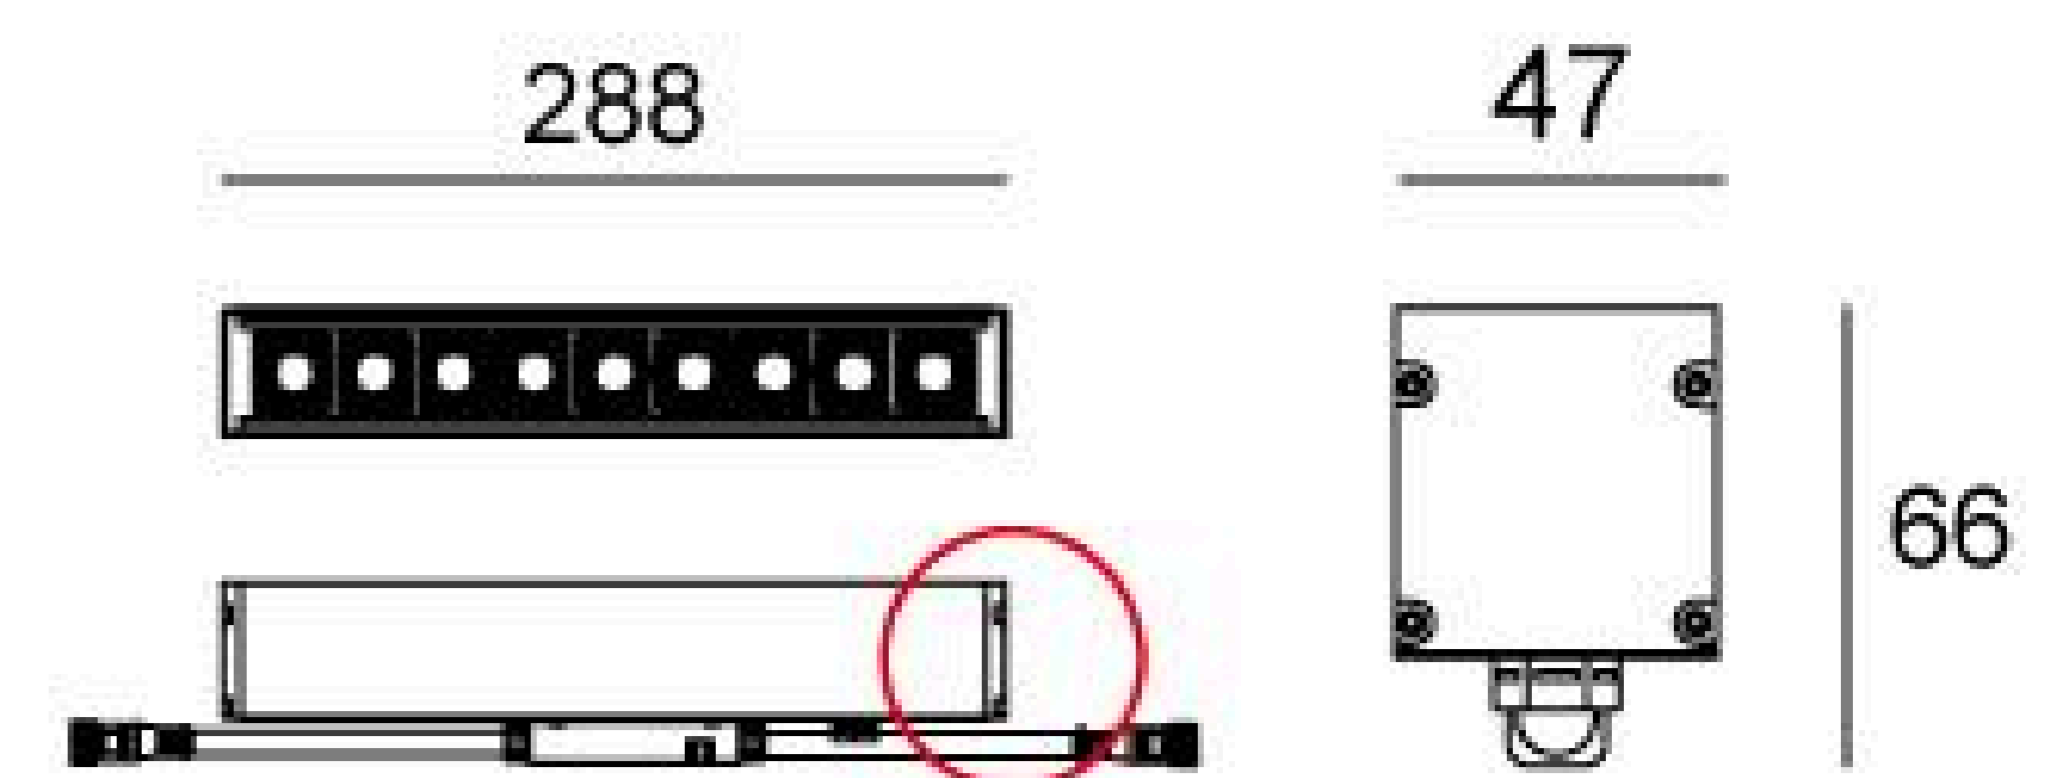

High Voltage

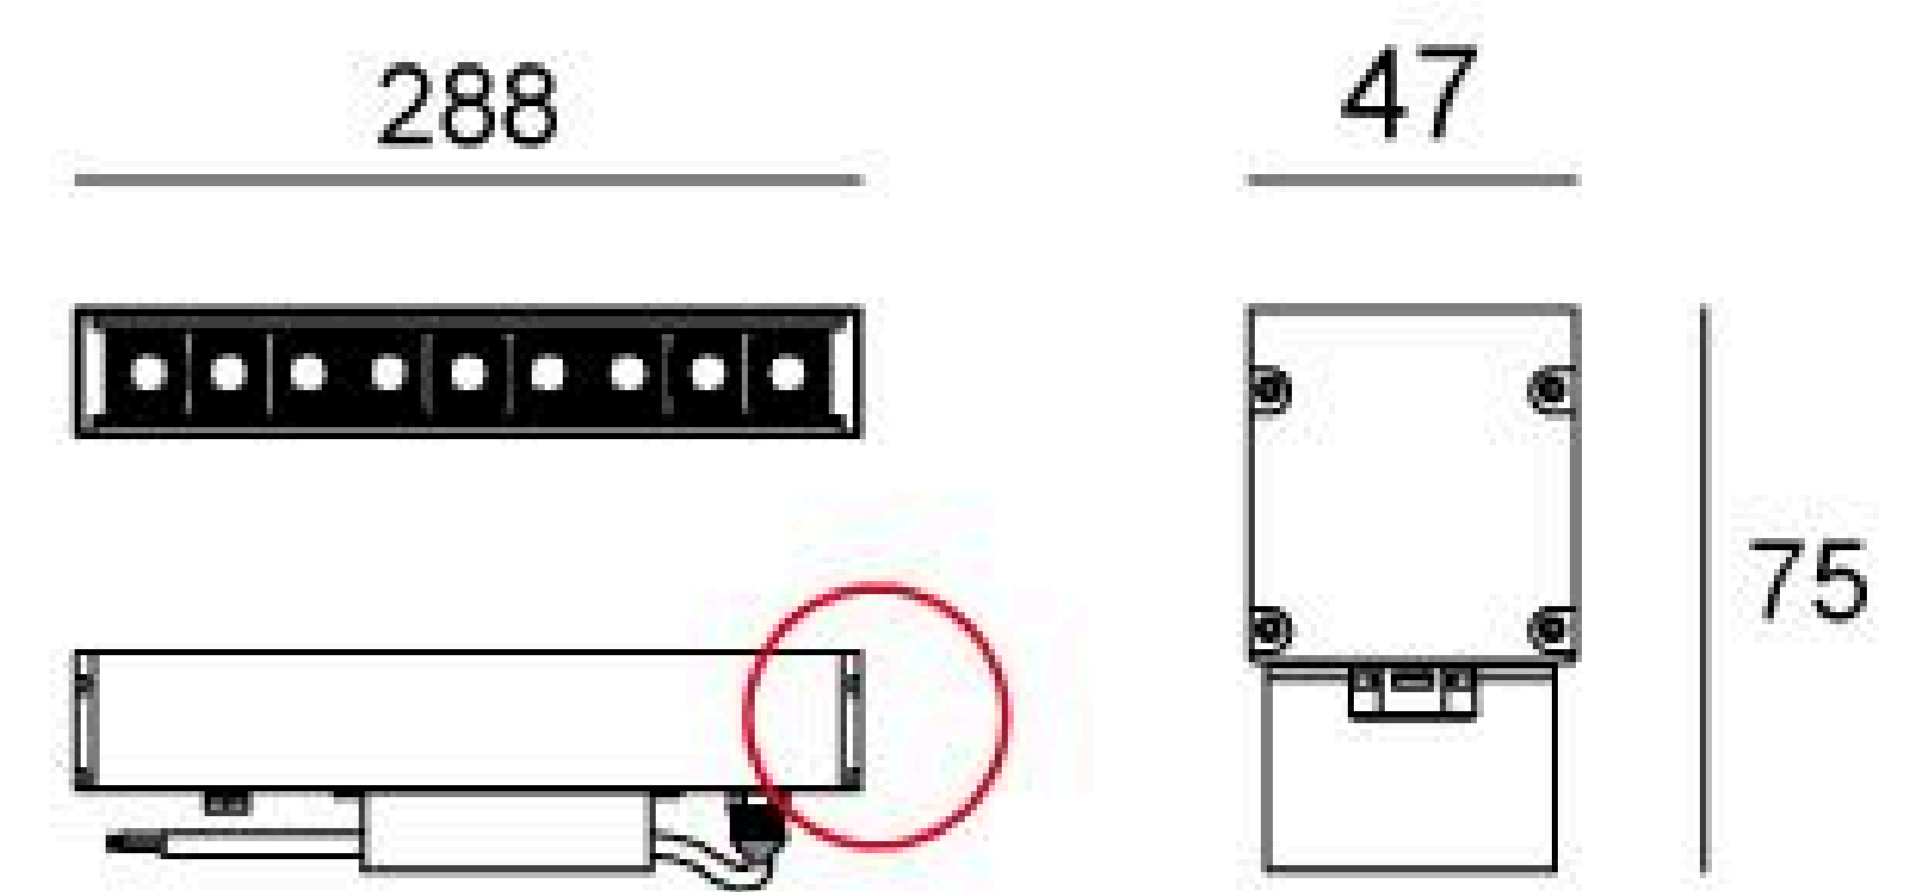


Unit: mm

Effective Beam Angle

15° 30°

Sleeve

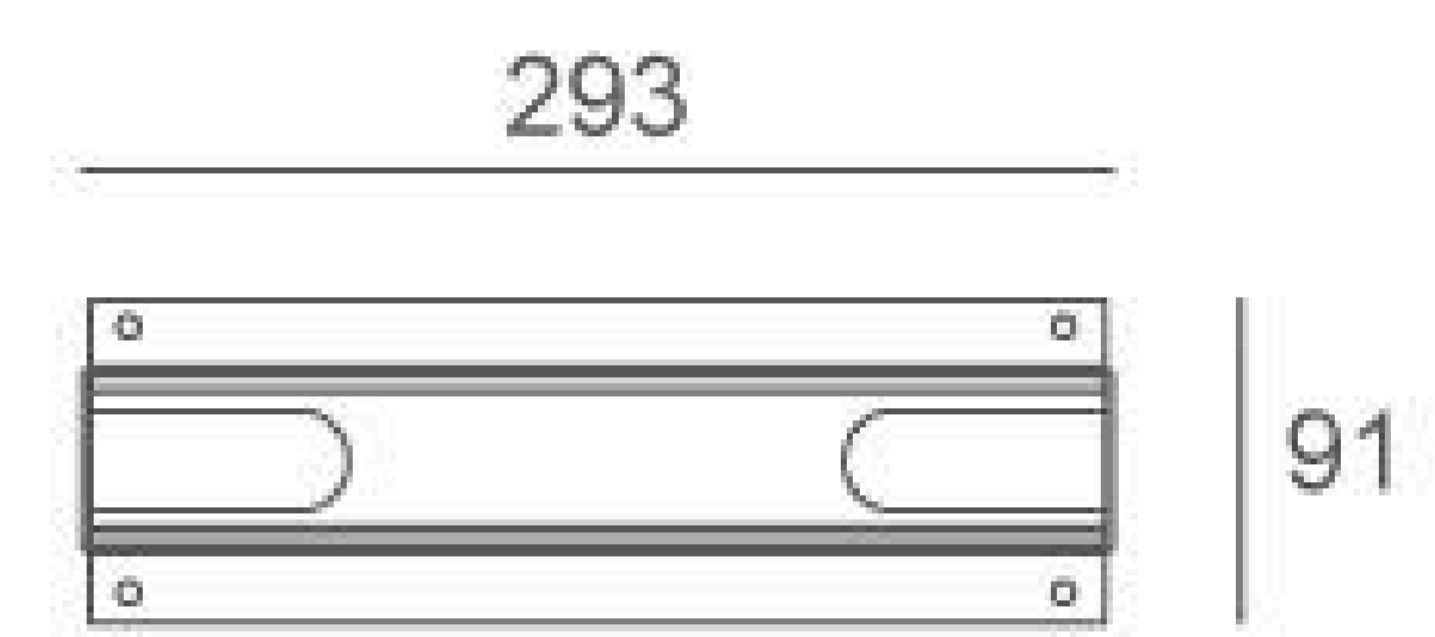

Sleeve 287#

