

# 02SKB3657


Light Source	36x1.5W
Selected Degree (°)θ1/2	30°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=2500 240V=290
Consumption (W)	24V=60 240V=66
Luminance (LM)	WW=3480
IK	10

## Specification

Housing	Extruded aluminum with corrosion
Light Window	Tempered glass.T=8mm
LED Type	SMD
PCB	Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk
Gasket	Glass and housing are silicone sealed
LED Driver	Built in on/off driver
Power Cable	Outside of luminaire (Without waterstopper) 24V: H07RN-F 2×1.5mm <sup>2</sup> L=1.2m 240V:H05RN-F 3×1.0mm <sup>2</sup> L=0.3m
Mounting Sleeve	Risistance painting
Glass Pressure Capacity	2524kgs
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request
Operating Temperature	-20°C~40°C


## Water Proof Solution

Low voltage

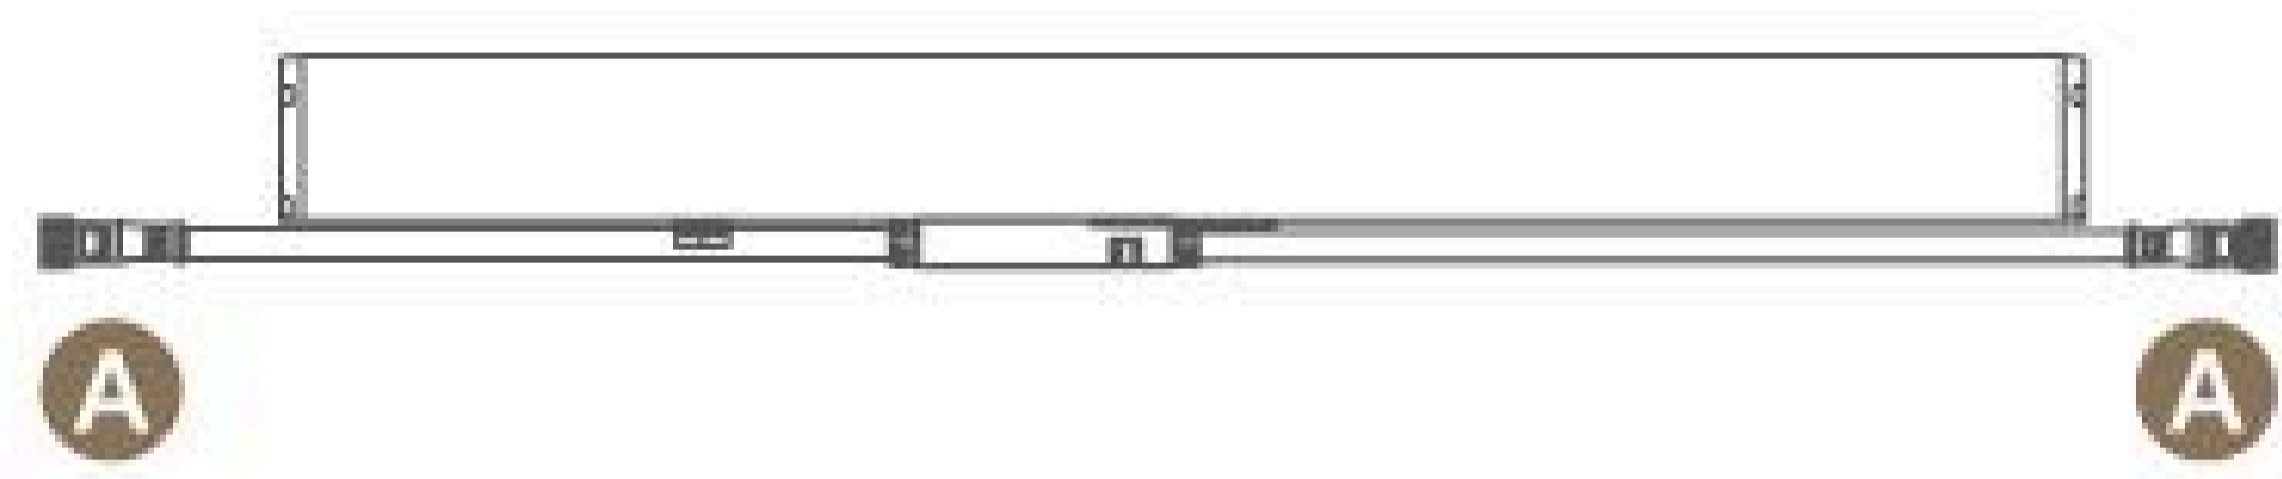

**A** IP67 Jiffy quick plug/socket connector(Included)


High voltage

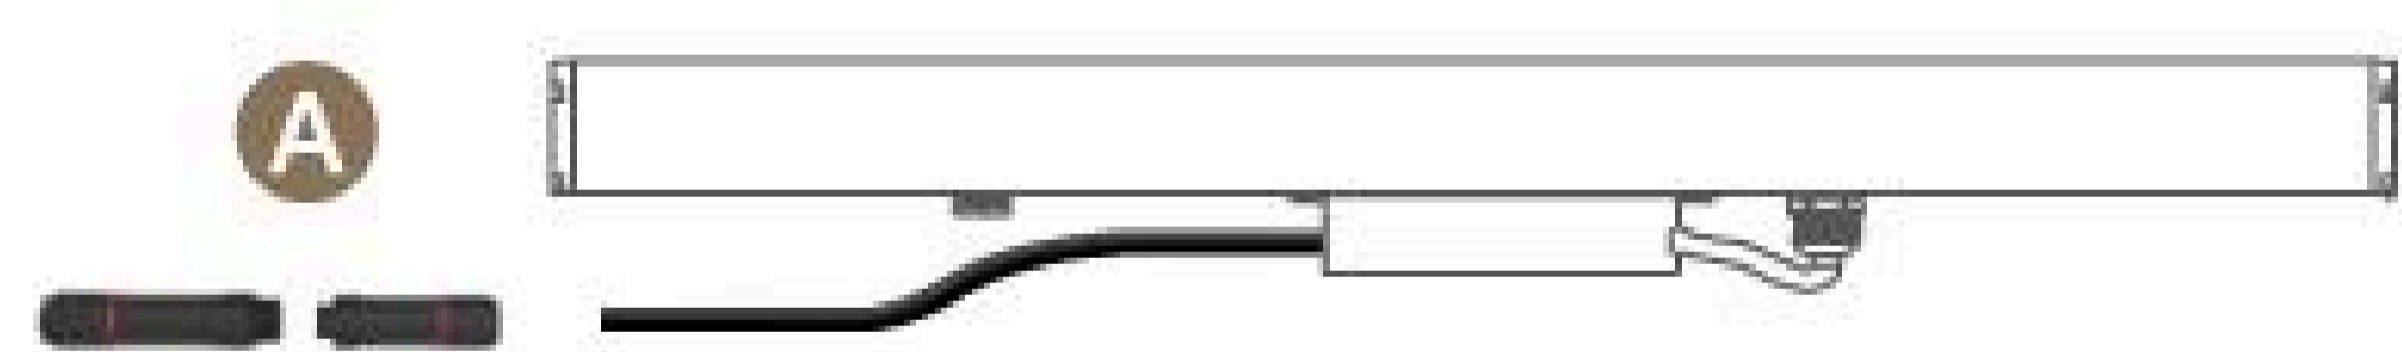


**A** IP67 Jiffy quick plug/socket connector(Option)

## Linear Drawing

Low Voltage

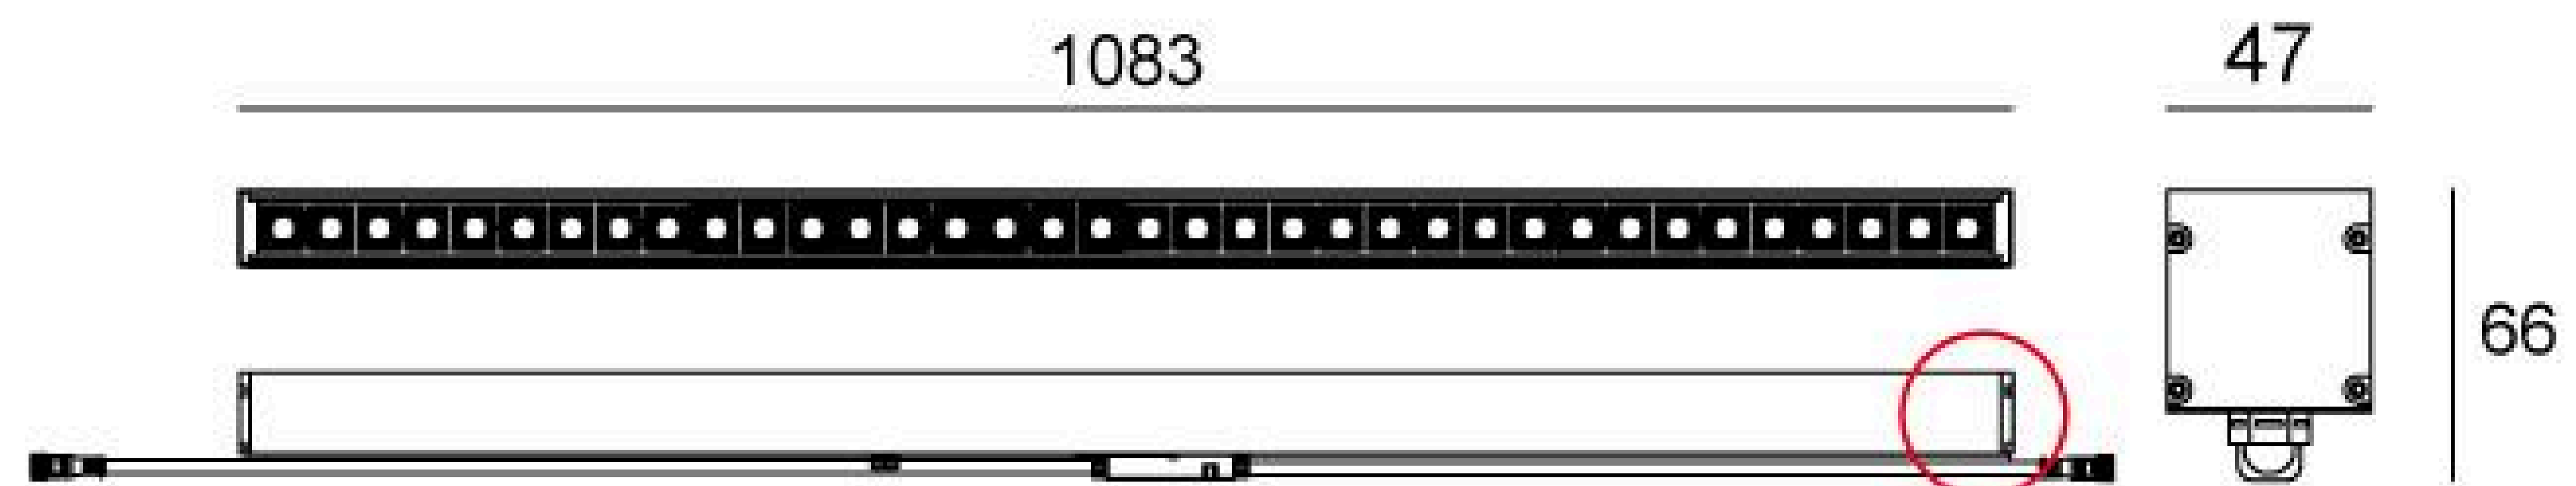

High Voltage

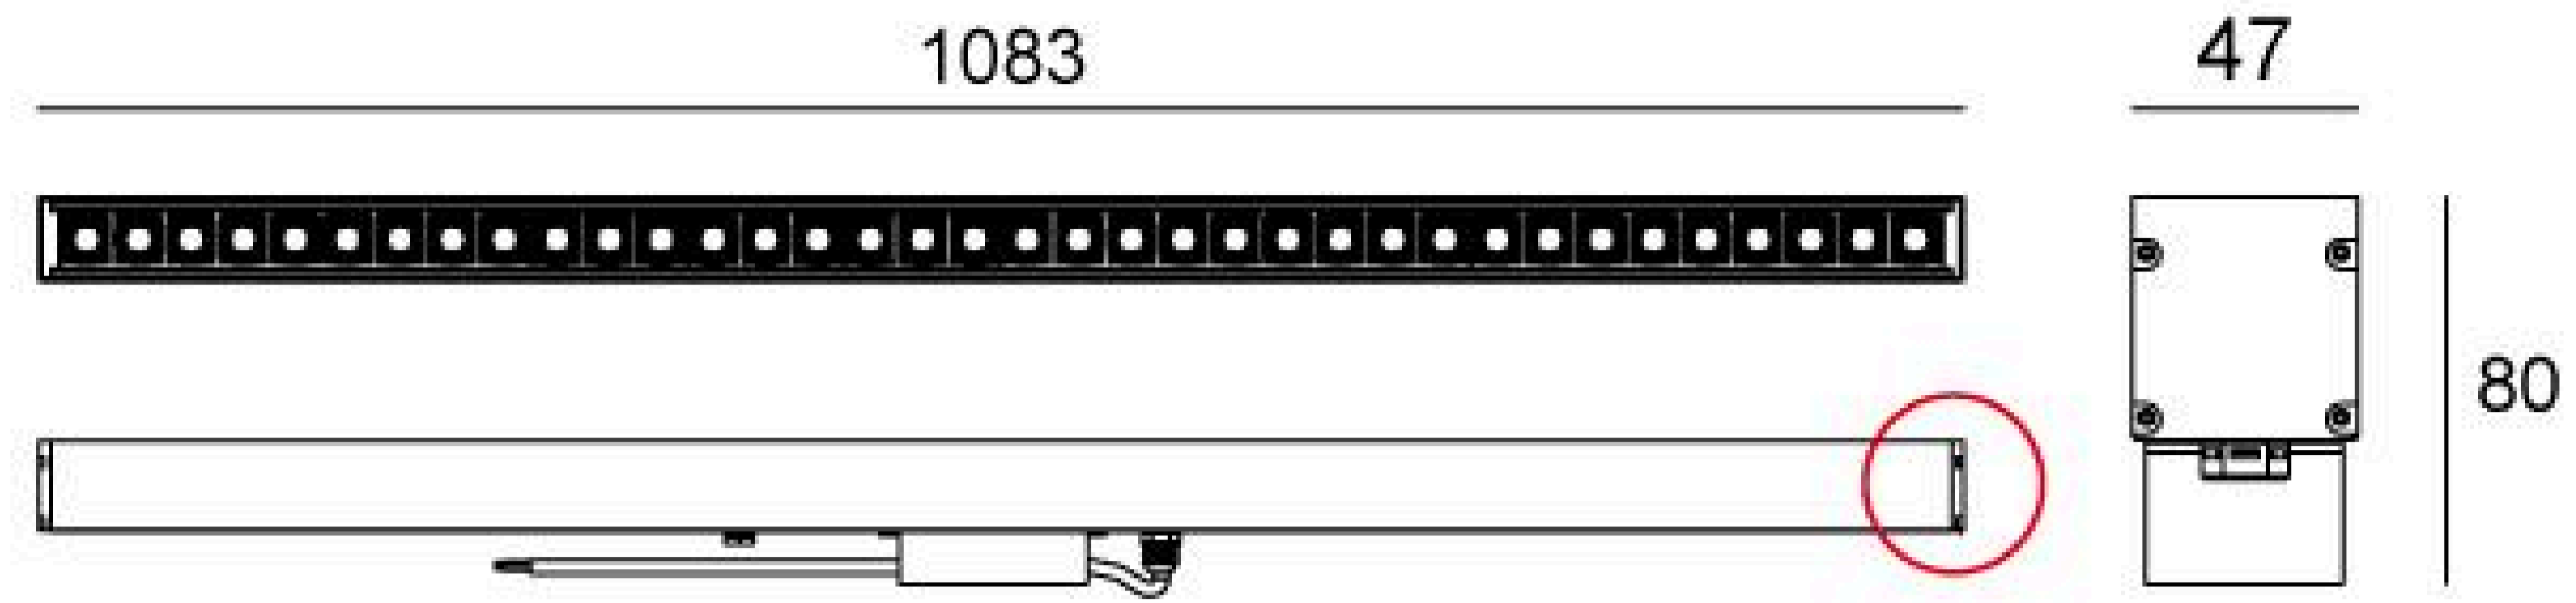


Unit: mm

## Effective Beam Angle

15° 30°

## Sleeve

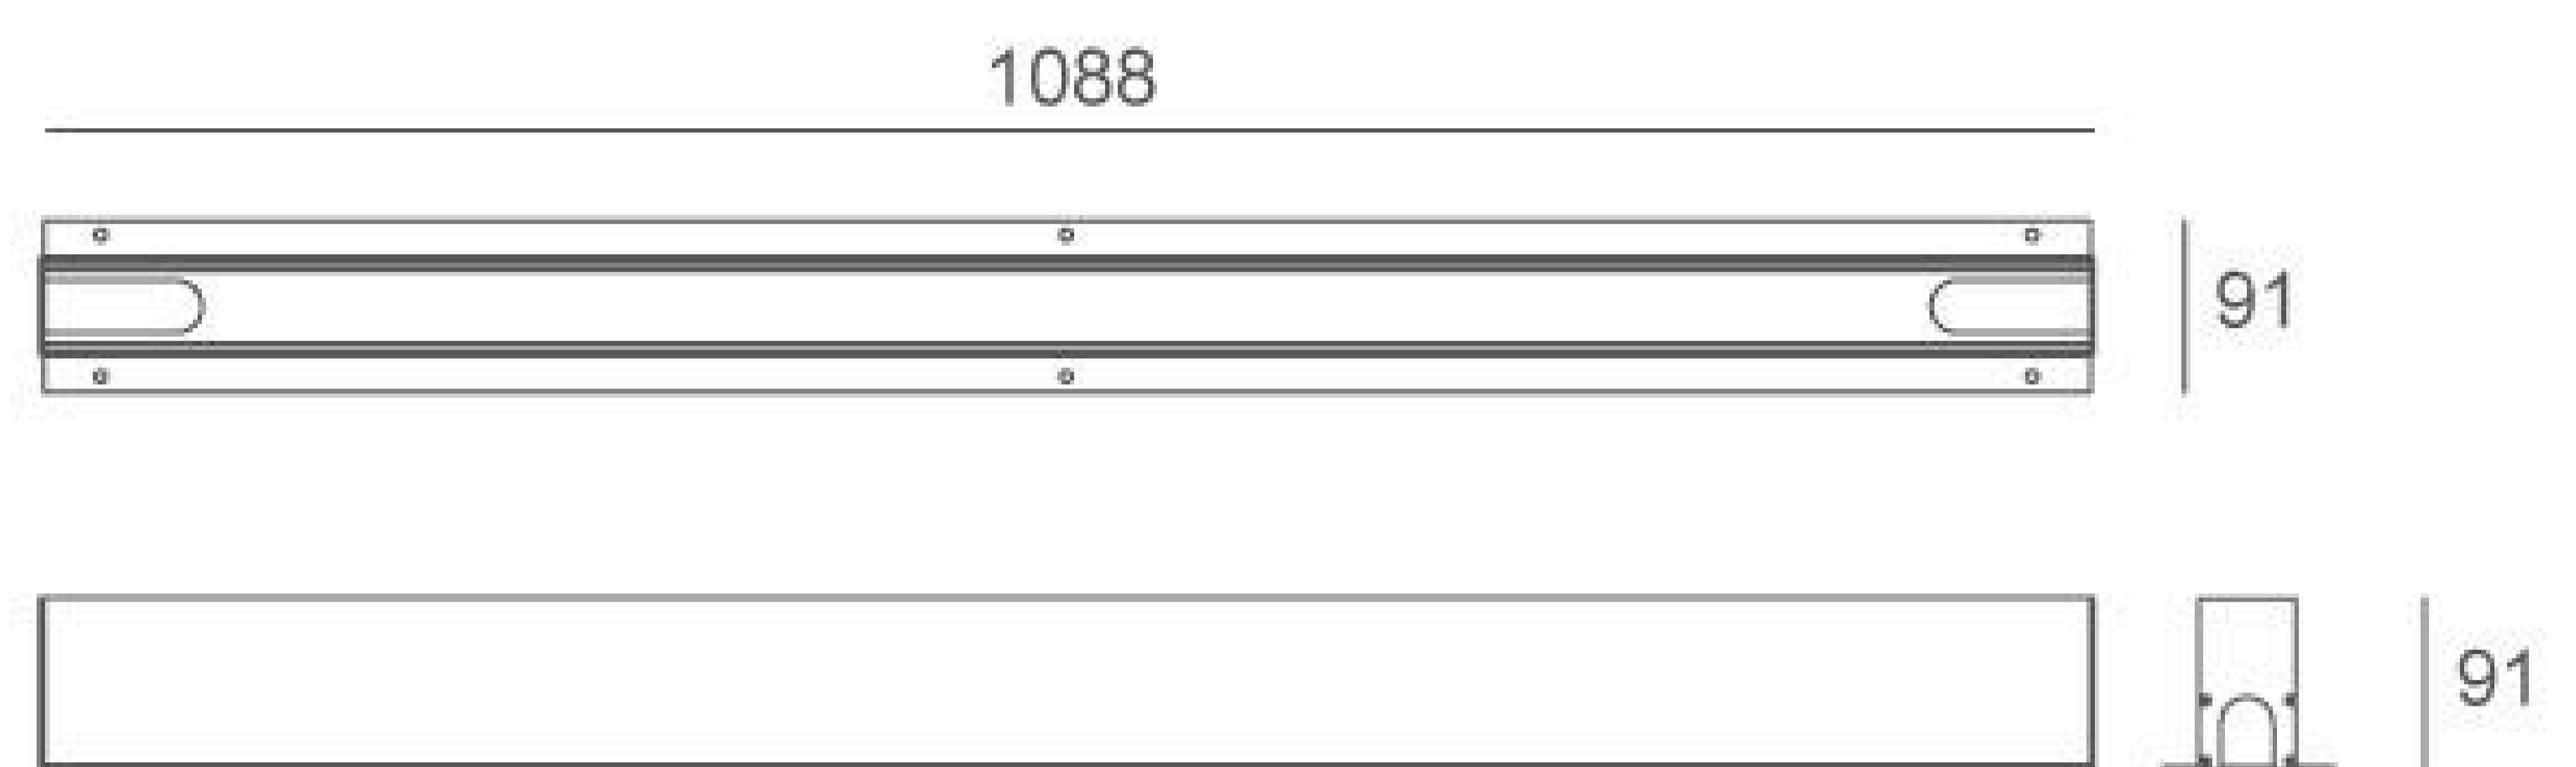

Sleeve 289#

