


03BVB0128

Light Source	1x10W
Lens	B55
Selected Degree (°)θ1/2	15°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=448 240V=45
Consumption (W)	24V=10.8 240V=10
Luminance (LM)	24V=760
IK	09

Linear Drawing

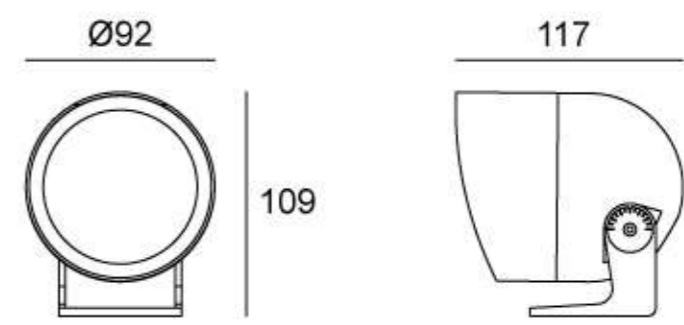

Unit: mm

Specification

Housing	12# Die-casting aluminum powder coated. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=6mm
Gasket	Tooling shaped seal
LED Type	COB
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=2.0m 240V: H05RN-F 3×1.0mm², L=2.0m

Lens (Item Code)

Referenced Degree(°)θ1/2



B55

15° 24° 38° 45° 60°

Painting Color

Primary



Sanded Black
RAL 9005

Secondary



Sanded Dark Grey
KAP 7037



Sanded Bronze
KAP 7008



Sanded White
RAL 9003

Optional (Accessories)

Spike PC/ABS alloys



18C

Stainless steel



12C

Mounting Base



BS002

- PC/ABS alloys for option assembled by user select. Stainless steel and the others for option.
- Mounting base for option assembled by user select.

Diagram of Instruction



A Water stopper(Included)

The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable. Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.

B IP67 Jiffy quick plug/socket connector(Option)

Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable. It is also the most IP-rating securing device for wiring.

