


## 03CRUB2465

Light Source	24x4.5W
Lens	B92
Selected Degree (°)θ1/2	20°
Input Voltage (V)	AC 120 240
Operating Current (MA)	120V=1105 240V=570
Consumption (W)	120V/240V=135
Luminance (LM)	240V=11234
IK	07

## Linear Drawing

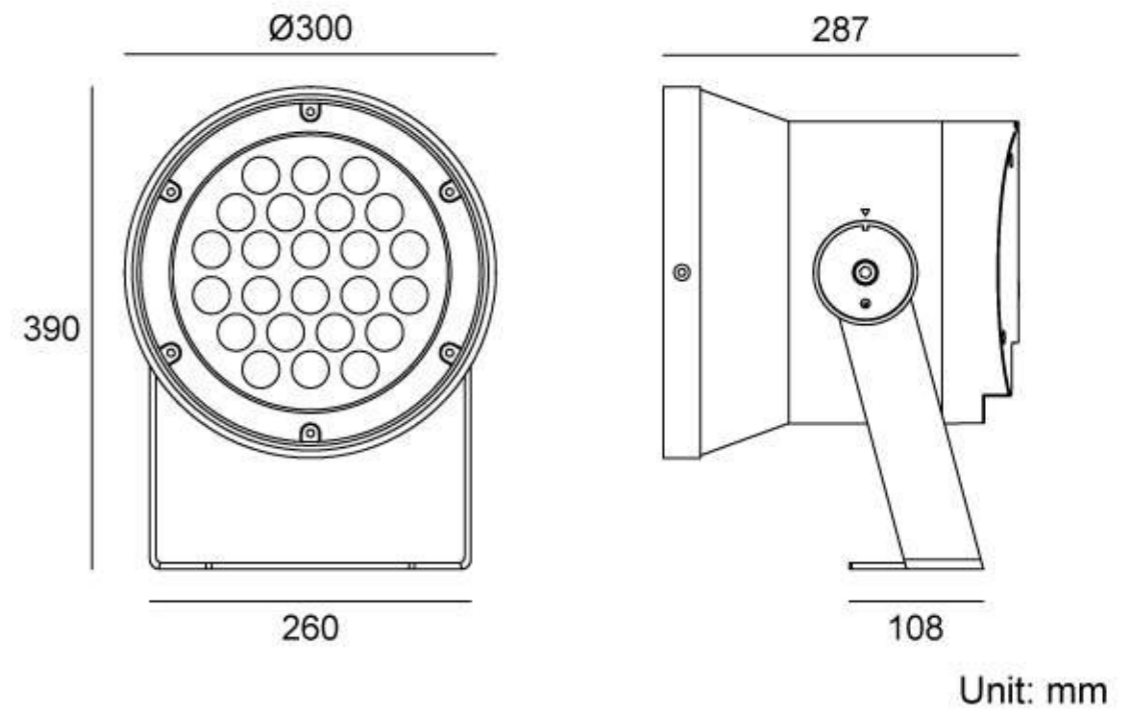

## Specification

Housing	12# Die-casting aluminum powder coated. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Bracket	Iron powder coated. T=5mm
Light Window	Tempered glass. T=3mm
Gasket	Tooling shaped seal
Cable Gland	IP68 PG-11 PA66
LED Type	SMD
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 120V/240V: H07RN-F 3×1.0mm², L=2.0m

## Lens (Item Code)

## Referenced Degree(°)θ1/2



B92

8° 15° 20° 30° 50°

## Painting Color

### Primary



Sanded Black  
RAL 9005

### Secondary



Sanded Dark Grey  
KAP 7037



Sanded Bronze  
KAP 7008




Sanded White  
RAL 9003

## Optional (Accessories)

### Hood




CA3044

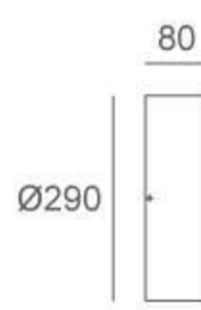

### Anti Glare Louver



CA3047

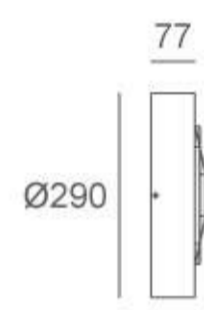

## Water Proof Solution

### A Water stopper(Included)


The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable.

Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.

### B IP67 Jiffy quick plug/socket connector(Option)

Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable.

It is the also the most IP-rating securing device for wiring.

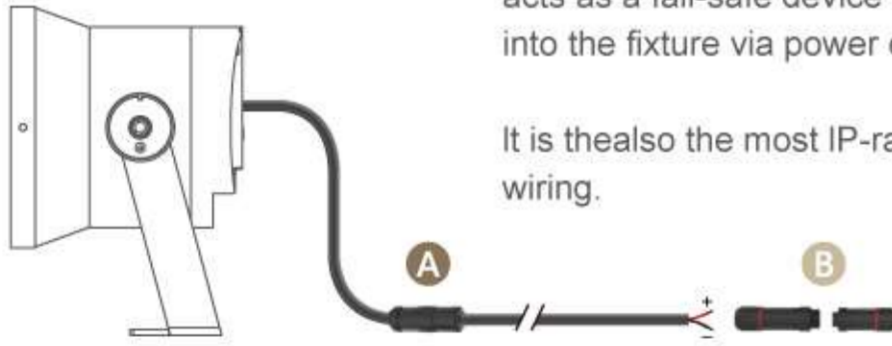



## Overview



## Photometric

12m	509.48 LUX
11m	
10m	733.65 LUX
9m	
8m	1146.32 LUX
7m	
6m	2037.91 LUX
5m	
4m	4585.30 LUX
3m	
2m	18341.19 LUX
1m	

03CRUB2465  
(24x4.5W B92-20°)

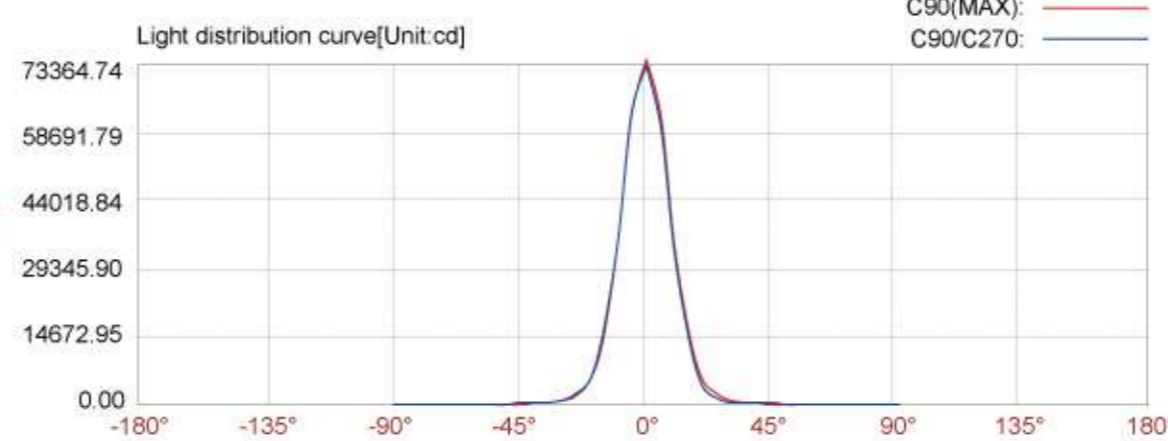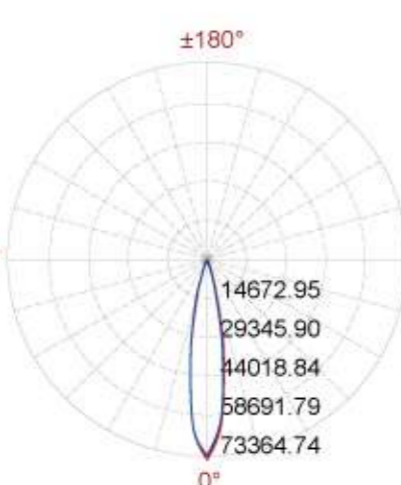

Center beam LUX	Illuminance at a distance	
	Beam width V	Beam width H
2m	18341.19 LUX	0.7m 0.7m
4m	4585.30 LUX	1.4m 1.4m
6m	2037.91 LUX	2.1m 2.0m
8m	1146.32 LUX	2.8m 2.7m
10m	733.65 LUX	3.4m 3.4m
12m	509.48 LUX	4.1m 4.1m

Ver.Spread:19.5 Horiz.Spread:19.3