


04AB0159K

Linear Drawing

Light Source	1x3.6W
Lens	B73
Selected Degree (°)θ1/2	30°
Input Voltage (V)	DC 12 24
Operating Current (MA)	12V=416 24V=210
Consumption (W)	5
Luminance (LM)	CW=426 WW=322
IK	08

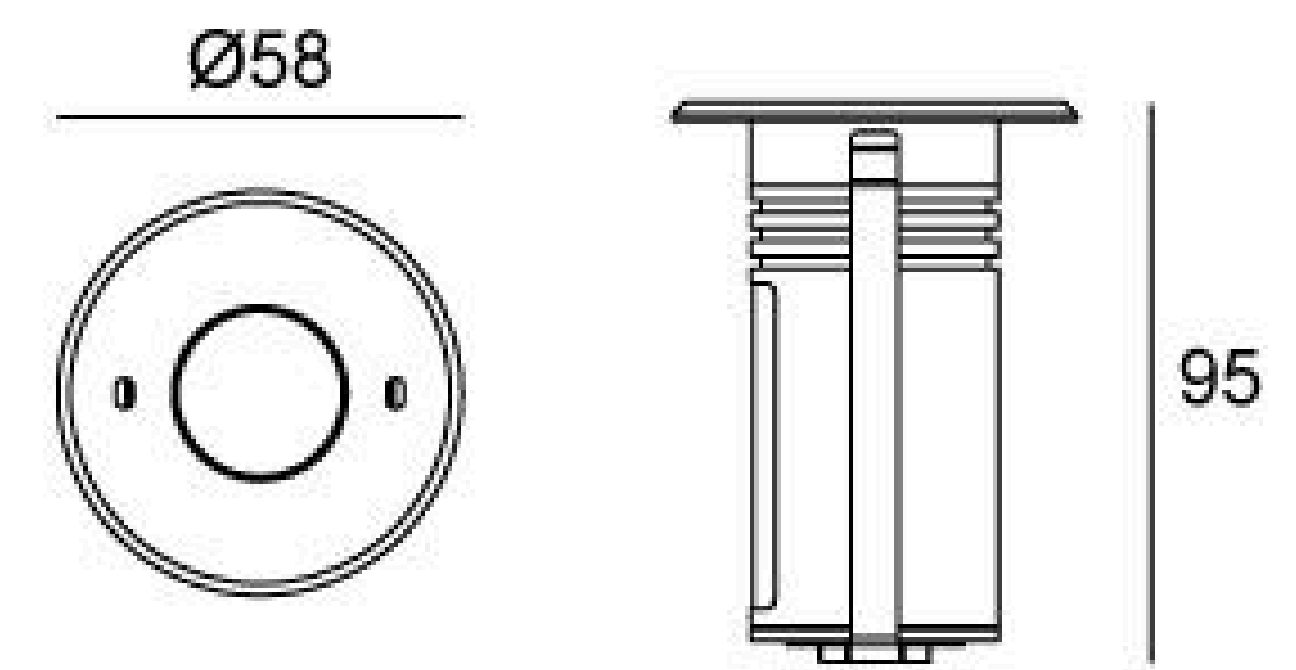

Unit: mm

Specification

Front Cover & Housing	Molding shaped 316L# Stainless steel Housing
Light Window	Step tempered glass. T=8mm
Cable Gland	IP68 copper with nickel-coated
Gasket	EPDM Gasket
Sleeve	PC/ABS ALLOYS
Operating Temperature	Temperature of water between -20°C~40°C Less than 2 meter depth
PCB	Excellent heat conductivity aluminum .coefficient of heat Conductivity≥2.0w/mk
Lens	Optical Lens,efficiency≥85%
LED Type	SMD
LED Driver	Built in on/off driver
Glass Pressure Capacity	8932kgs
Power Cable Optional	Outside of luminaire (Without waterstopper) H07RN-F 2×1.0mm² with water-stopper, L=1m, 3m, 5m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2



B73

30°

Water proof Solution

- A Water-Stopper(Included)**
The luminaires produce high temperatures during use, which can create negative pressure upon power-off, drawing water vapor through the power cable. Therefore, it is essential for the device to prevent water vapor ingress with water-stopper.
- B IP68 Jiffy quick plug/socket connector(Optional)**
Along with water-stopper, this optional accessory acts as a fail-safe device for preventing vapor getting into the fixture via power cable. It is the also the most IP-rating securing device for wiring.
- C Fixator:**
Easier mounting sleeve installment.
- D IP68 cable gland:**
Prevents water from getting into the cable tube.
P.s: Please prepare your own cable tube.

Sleeve (Included)


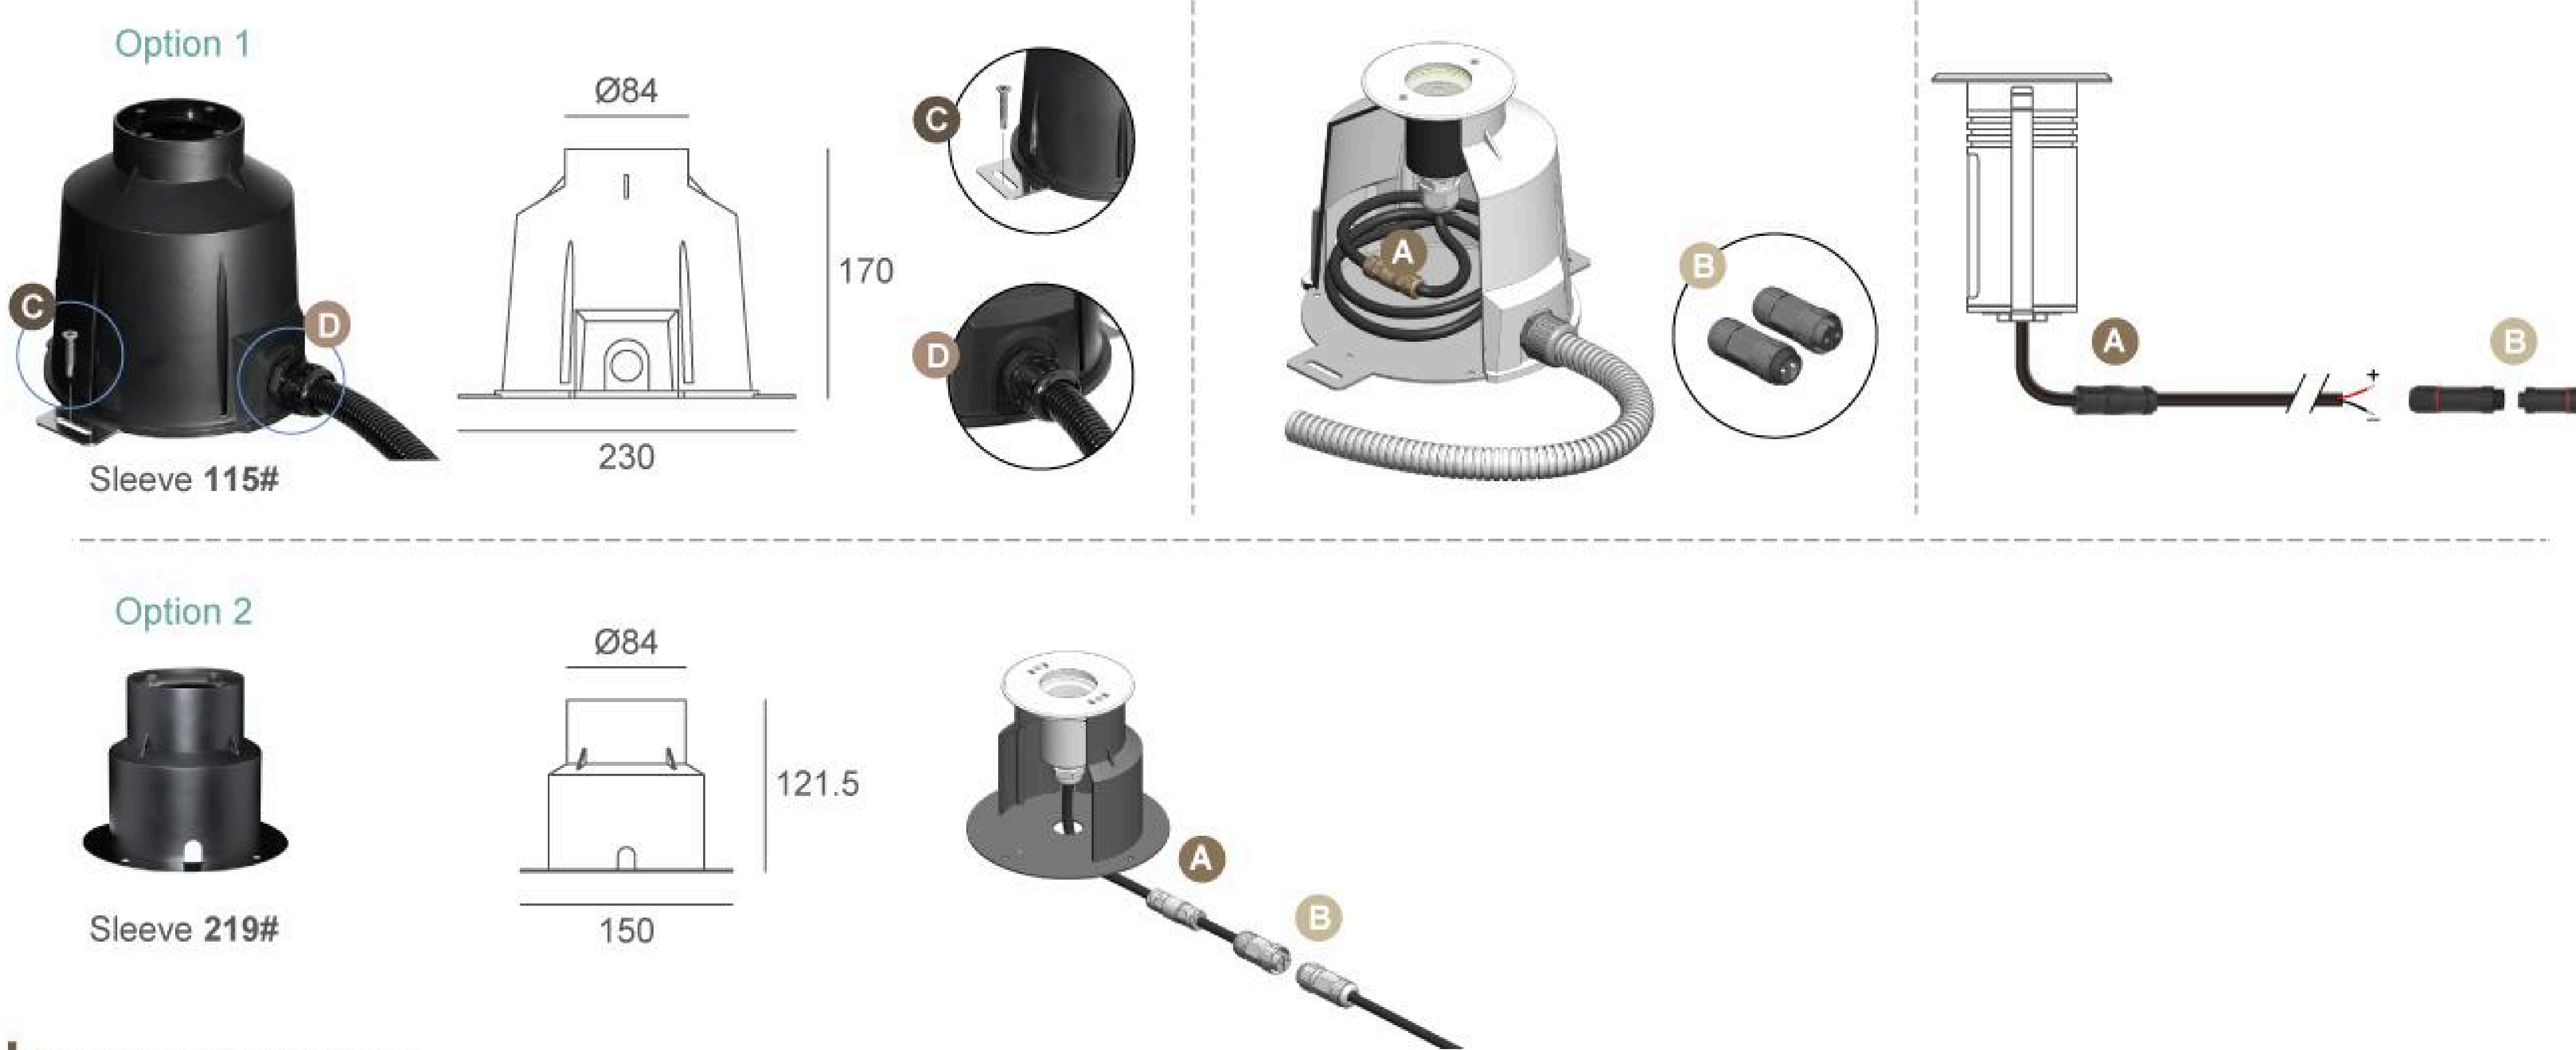


Diagram of Instruction



Photometric

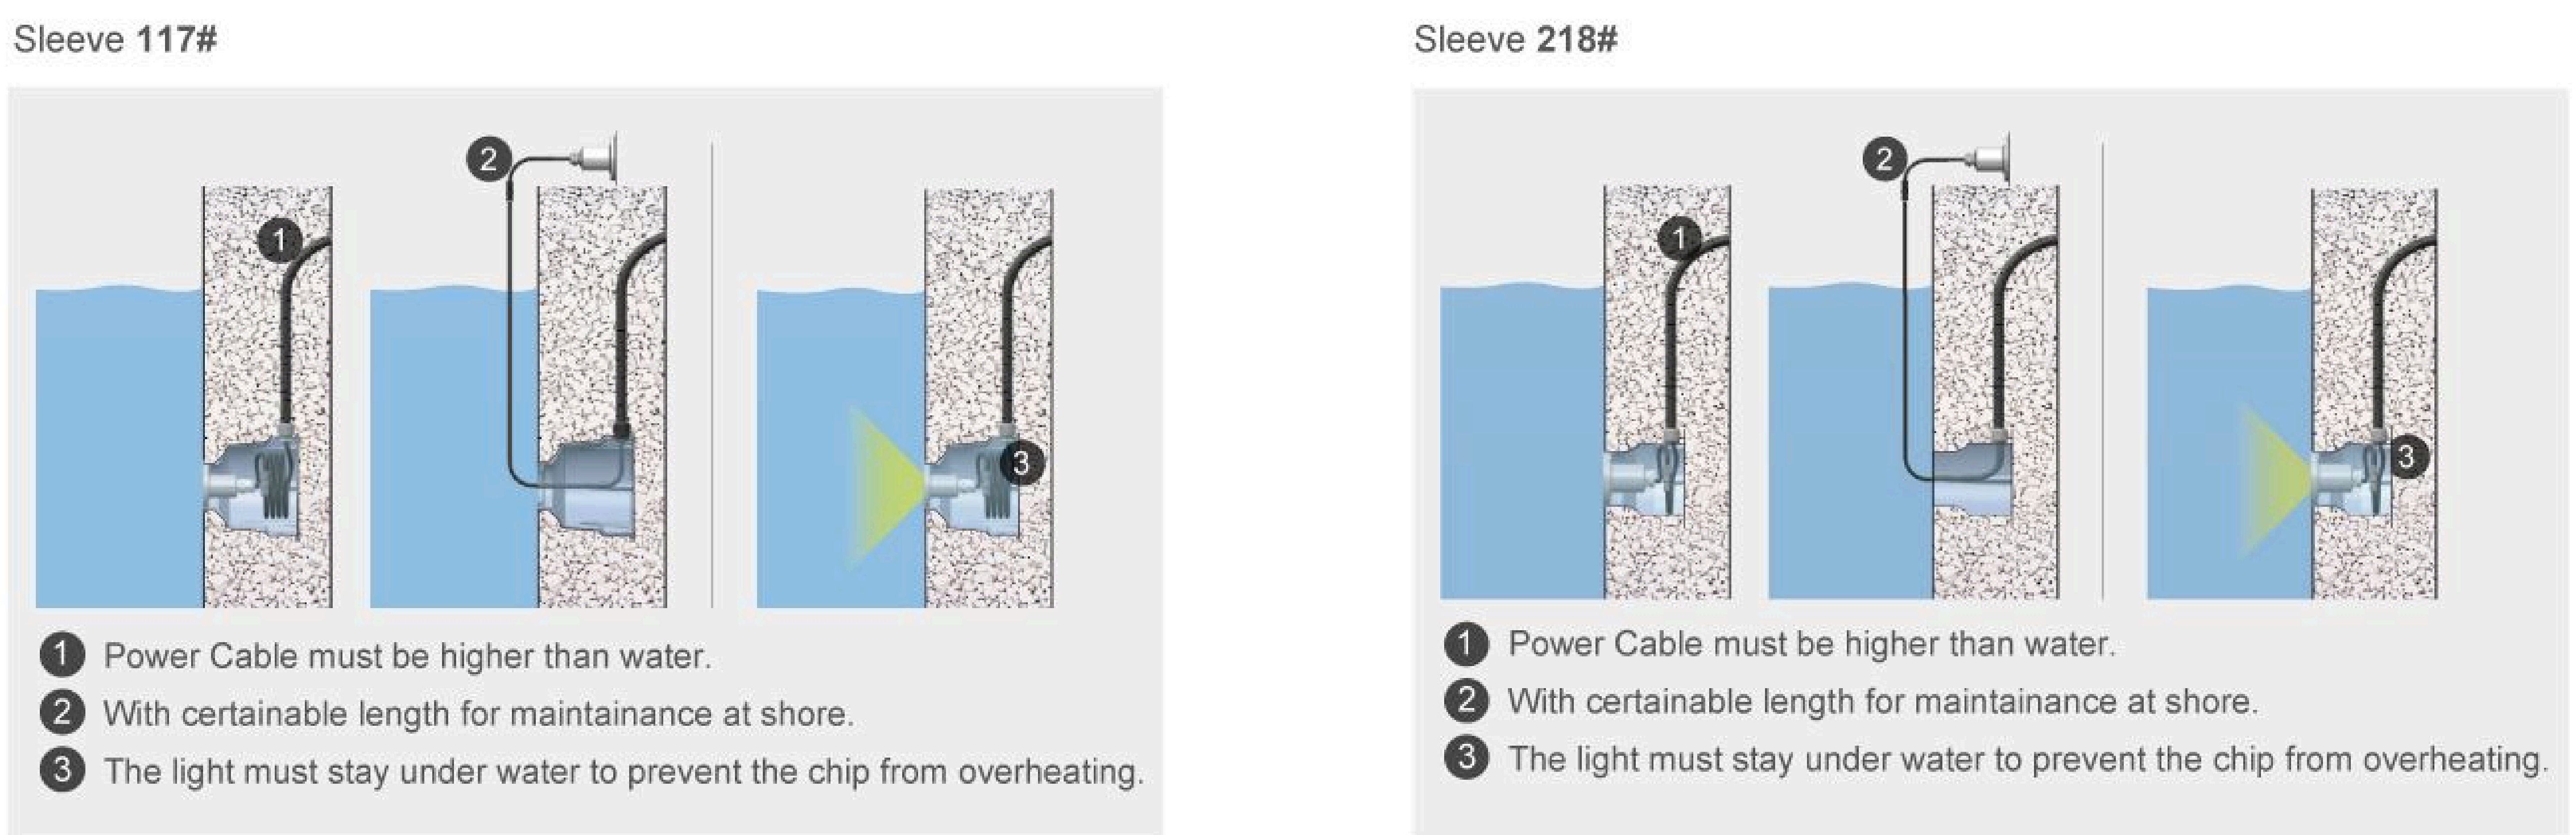