

# 06HDB6056


Light Source	60x0.7W
Selected Degree (°)θ1/2	30°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1958 240V=240
Consumption (W)	24V=47 240V=55
Luminance (LM)	WW=2209
IK	08

## Specification


Housing	Extruded aluminum with corrosion
Bracket	SUS 202#
Light Window	Tempered glass.T=4mm
Gasket	Glass and Housing are silicone sealed
Lens	OPTICS Lens,efficiency≥85%
Operating Temperature	-20°C~40°C
LED Type	SMD
Power Cable	Outside of luminaire (Without waterstopper) H07RN-F 2×1.5mm², L=1.5m(24V) H05RN-F 3×1.0mm², L=0.3m(240V)
Dimming Support	External DALI TRIAC,0-10V, PWM(24V)

## Connection

Low Voltage Input (24VDC) Power Cord Model

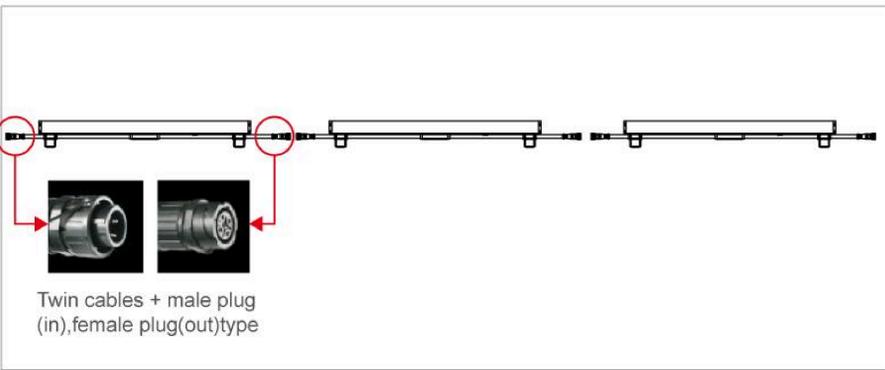

## Linear Drawing

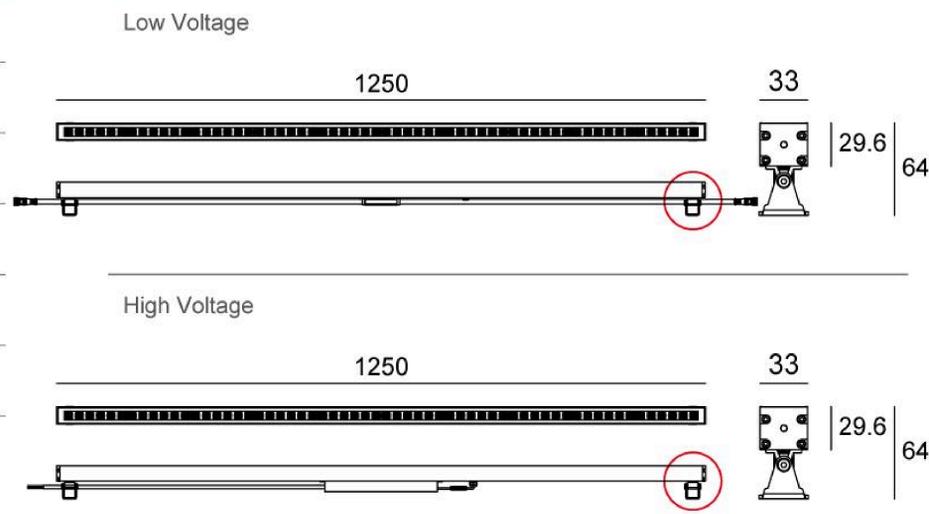


Unit: mm

## Effective Beam Angle

30° 40° 25°x40°

High Voltage Input (100-120V) Power Cord Wiring Model

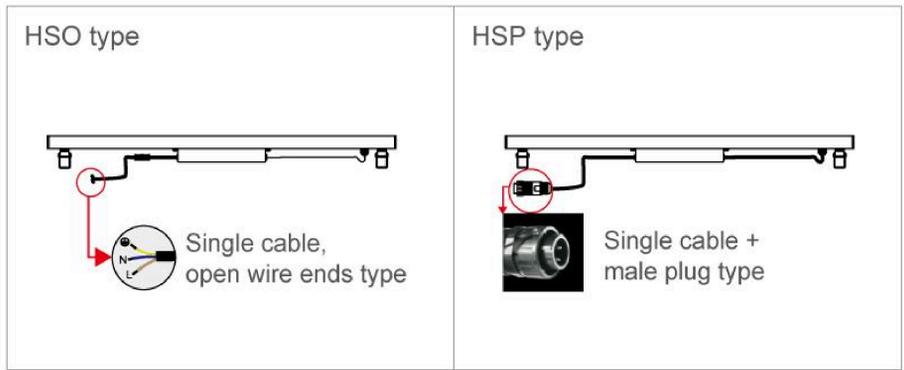

**High voltage input default:**  
Single HSO type Power Cable, waterproof plugs are not included.  
(Other Power Cable type and plugs are optional)

