

## 06TLB1857


Light Source	18x1.5W
Selected Degree (°)θ1/2	30°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1250 240V=158
Consumption (W)	24V=30 240V=35
Luminance (LM)	WW=2236
IK	08

### Specification


Housing	Extruded aluminum with corrosion
Bracket	SUS 202#
Light Window	Tempered glass.T=4mm
Gasket	Glass and Housing are silicone sealed
Lens	OPTICS Lens,efficiency≥85%
Operating Temperature	-20°C~40°C
LED Type	SMD
Power Cable	Outside of luminaire (Without waterstopper) H07RN-F 2×1.5mm <sup>2</sup> , L=0.65m(24V) H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m(240V)
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

### Connection

#### Low Voltage Input (24VDC) Power Cord Model

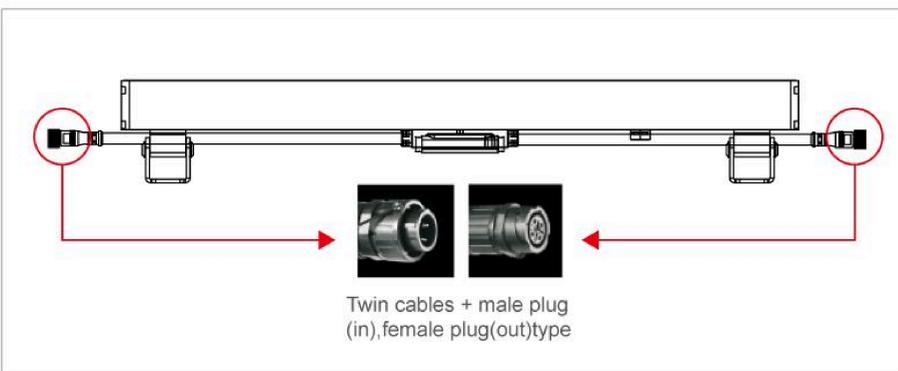


### Linear Drawing

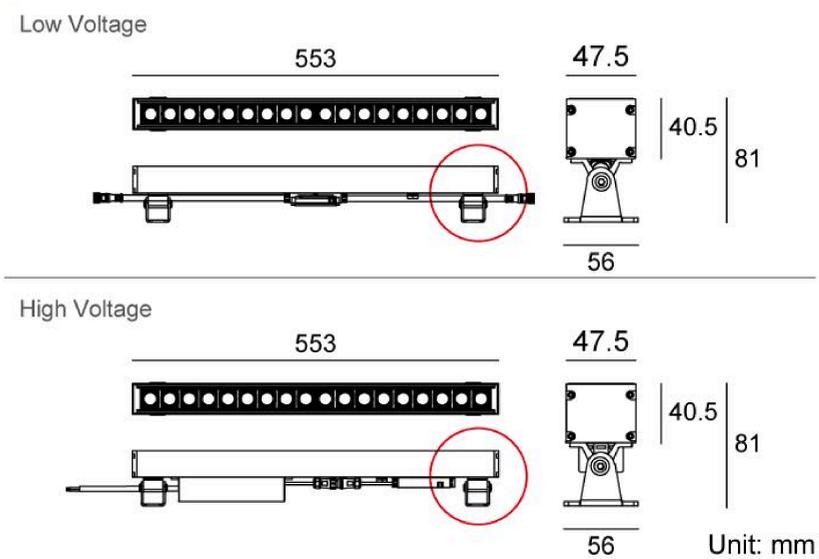

### Effective Beam Angle

15° 30°

#### High Voltage Input (120-240VDC) Power Cord Model

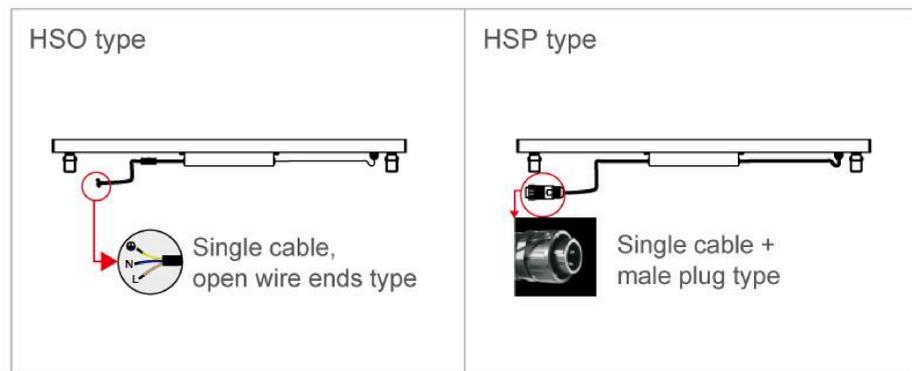

#### High voltage input default:

Single HSO type Power Cable, waterproof plugs are not included.  
(Other Power Cable type and plugs are optional)

