


07DHB0124K (ONE SIDE)	
Light Source	1x4.5W
Lens	B54
Selected Degree (°)θ1/2	24°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=233 240V=48
Consumption (W)	24V=5.6 240V=6
Luminance (LM)	WW=282
IK	08

Linear Drawing

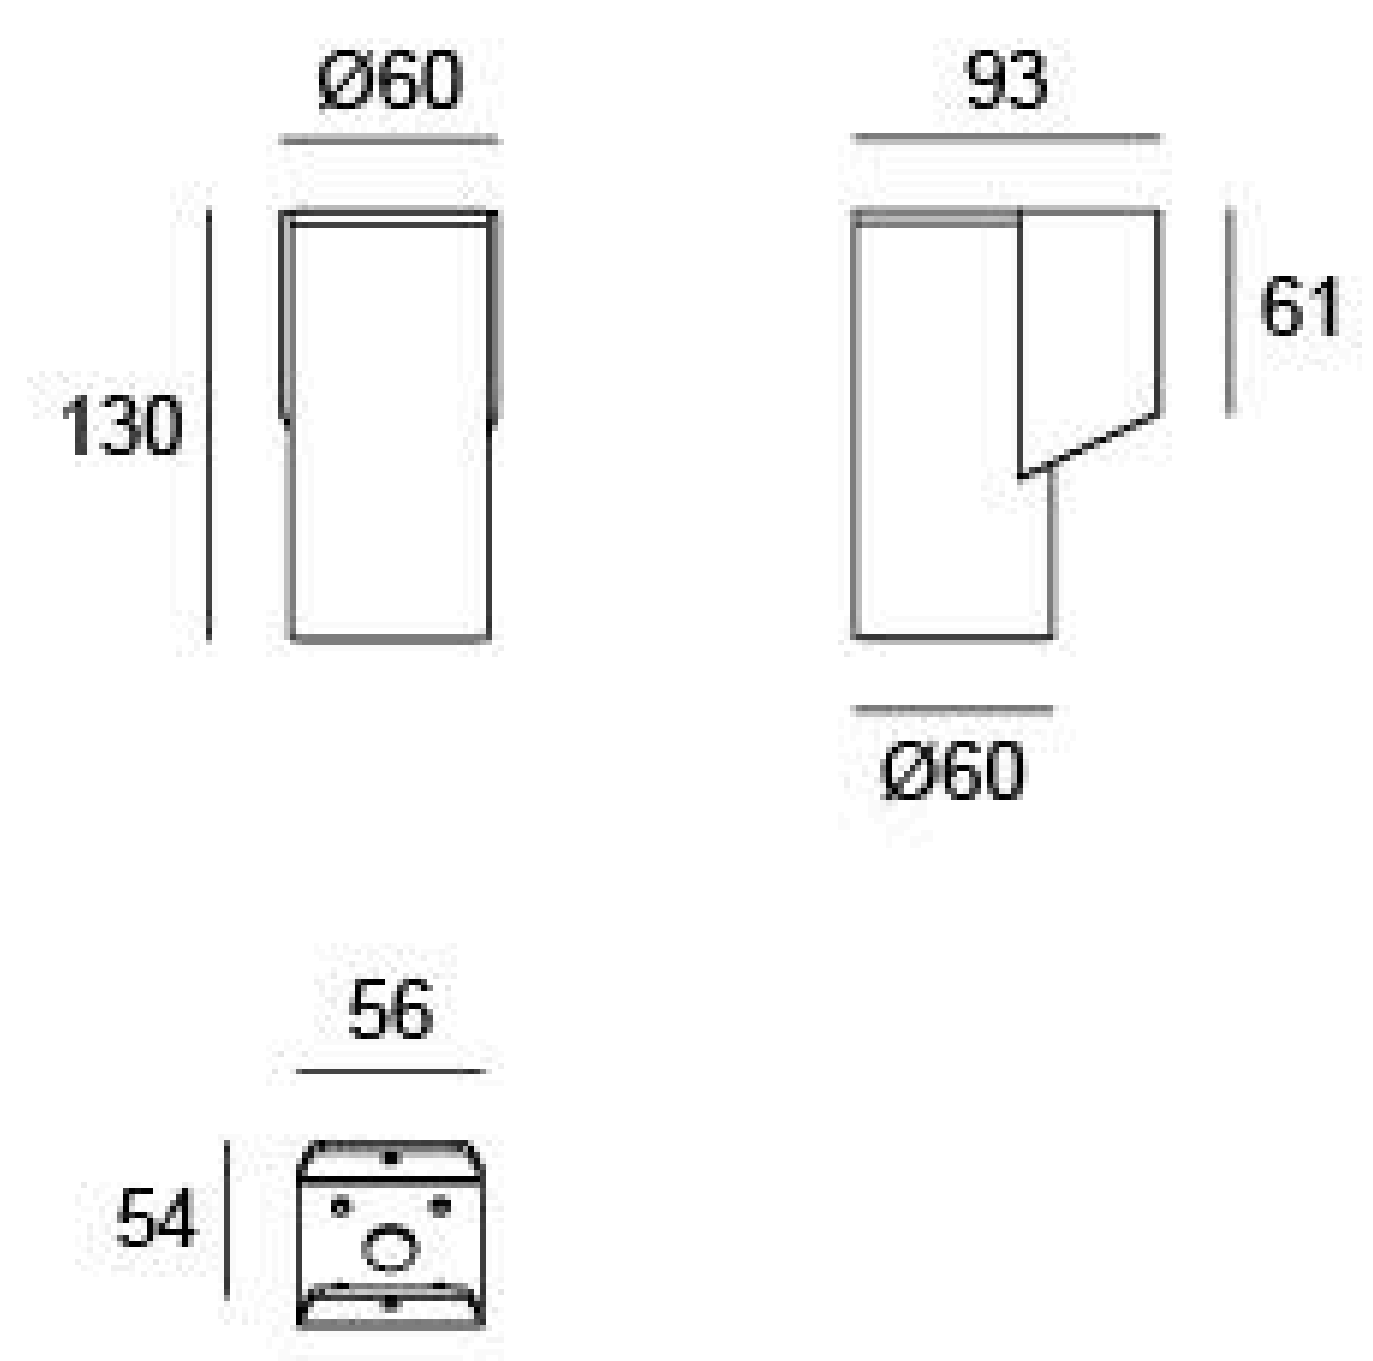

Unit: mm

Specification	
Housing	Extruded aluminum alloy #6063 powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	PC
Gasket	Waterproof silicone gasket
LED Type	COB
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm <sup>2</sup> , L=0.3m 240V: H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m

Lens (Item Code)	Referenced Degree(°)θ1/2
------------------	--------------------------



15° 24° 38° 45°

Painting Color

Primary




Secondary



Overview





Diagram of Instruction

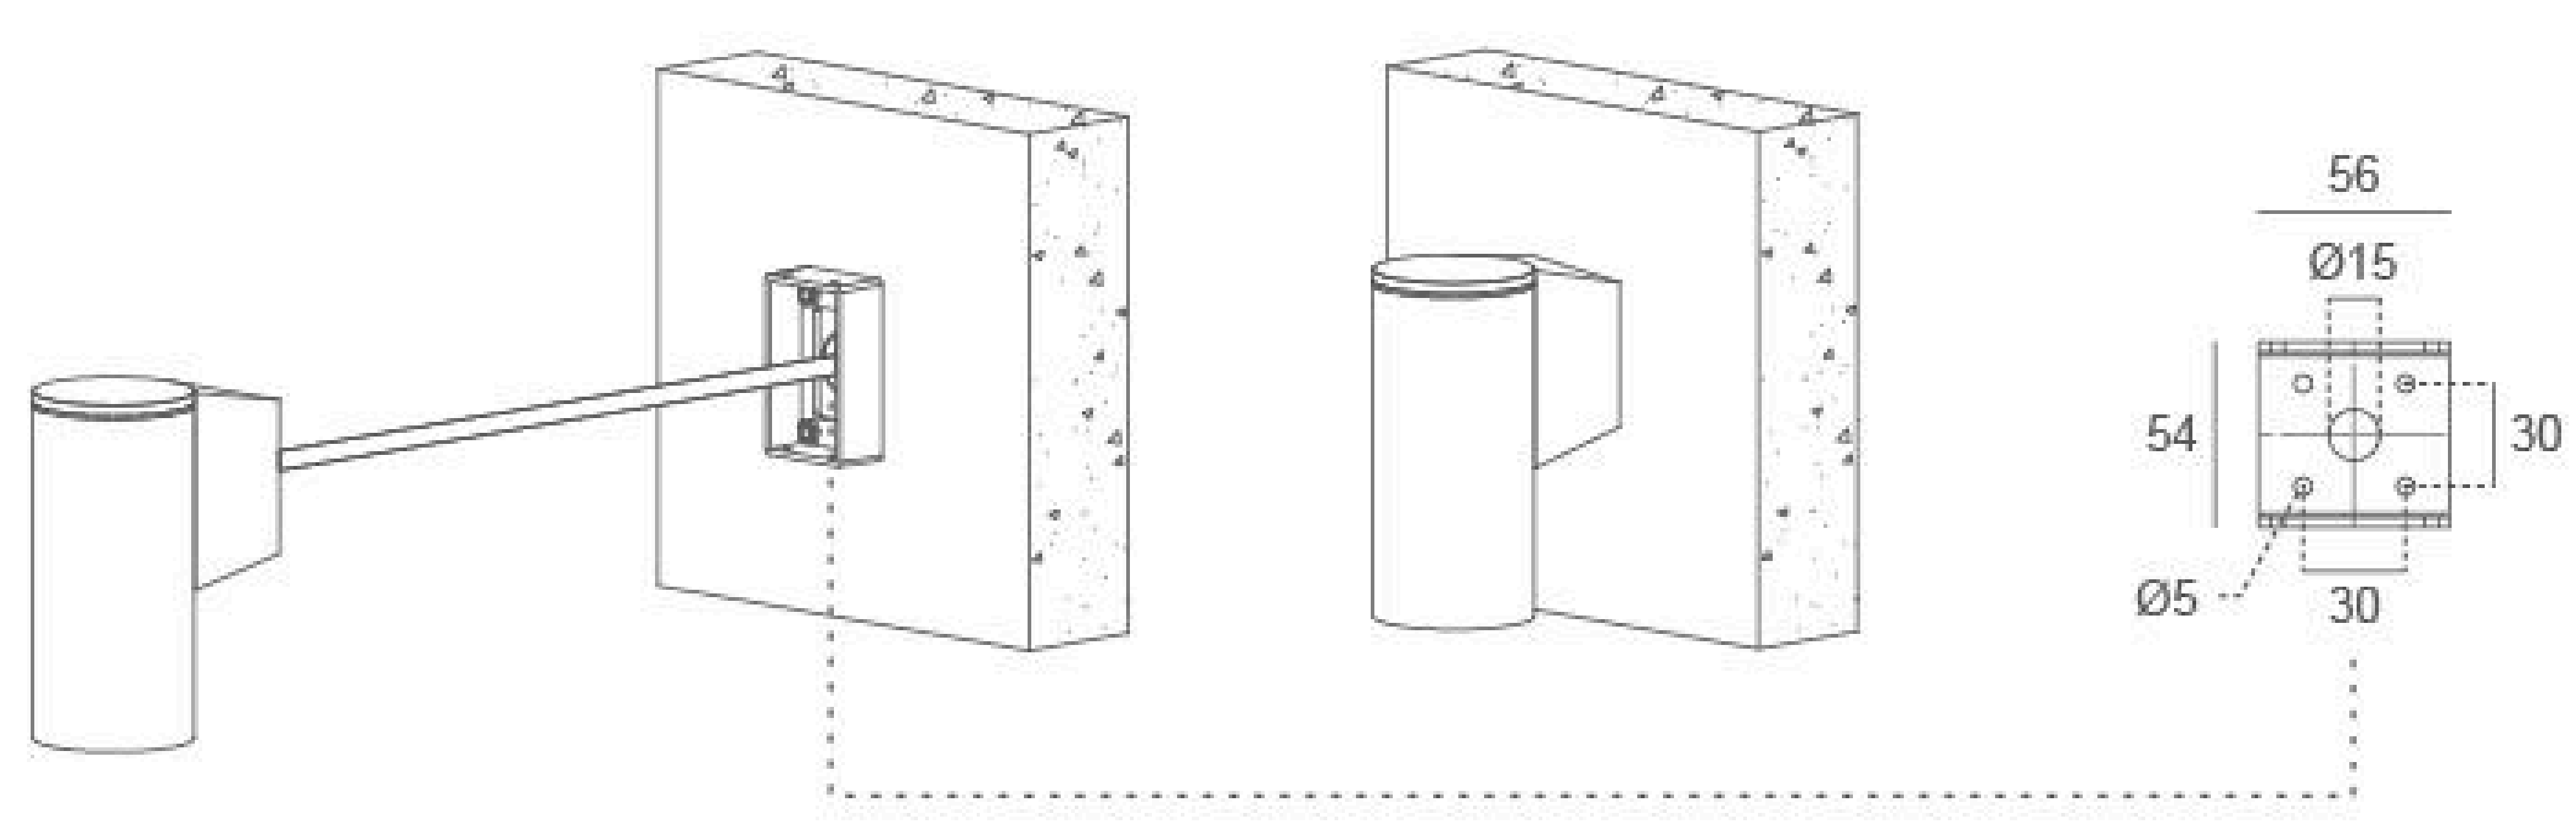

Photometric

12m	13.74 LUX
11m	
10m	19.78 LUX
9m	
8m	30.91 LUX
7m	
6m	54.95 LUX
5m	
4m	123.64 LUX
3m	
2m	494.55 LUX
1m	

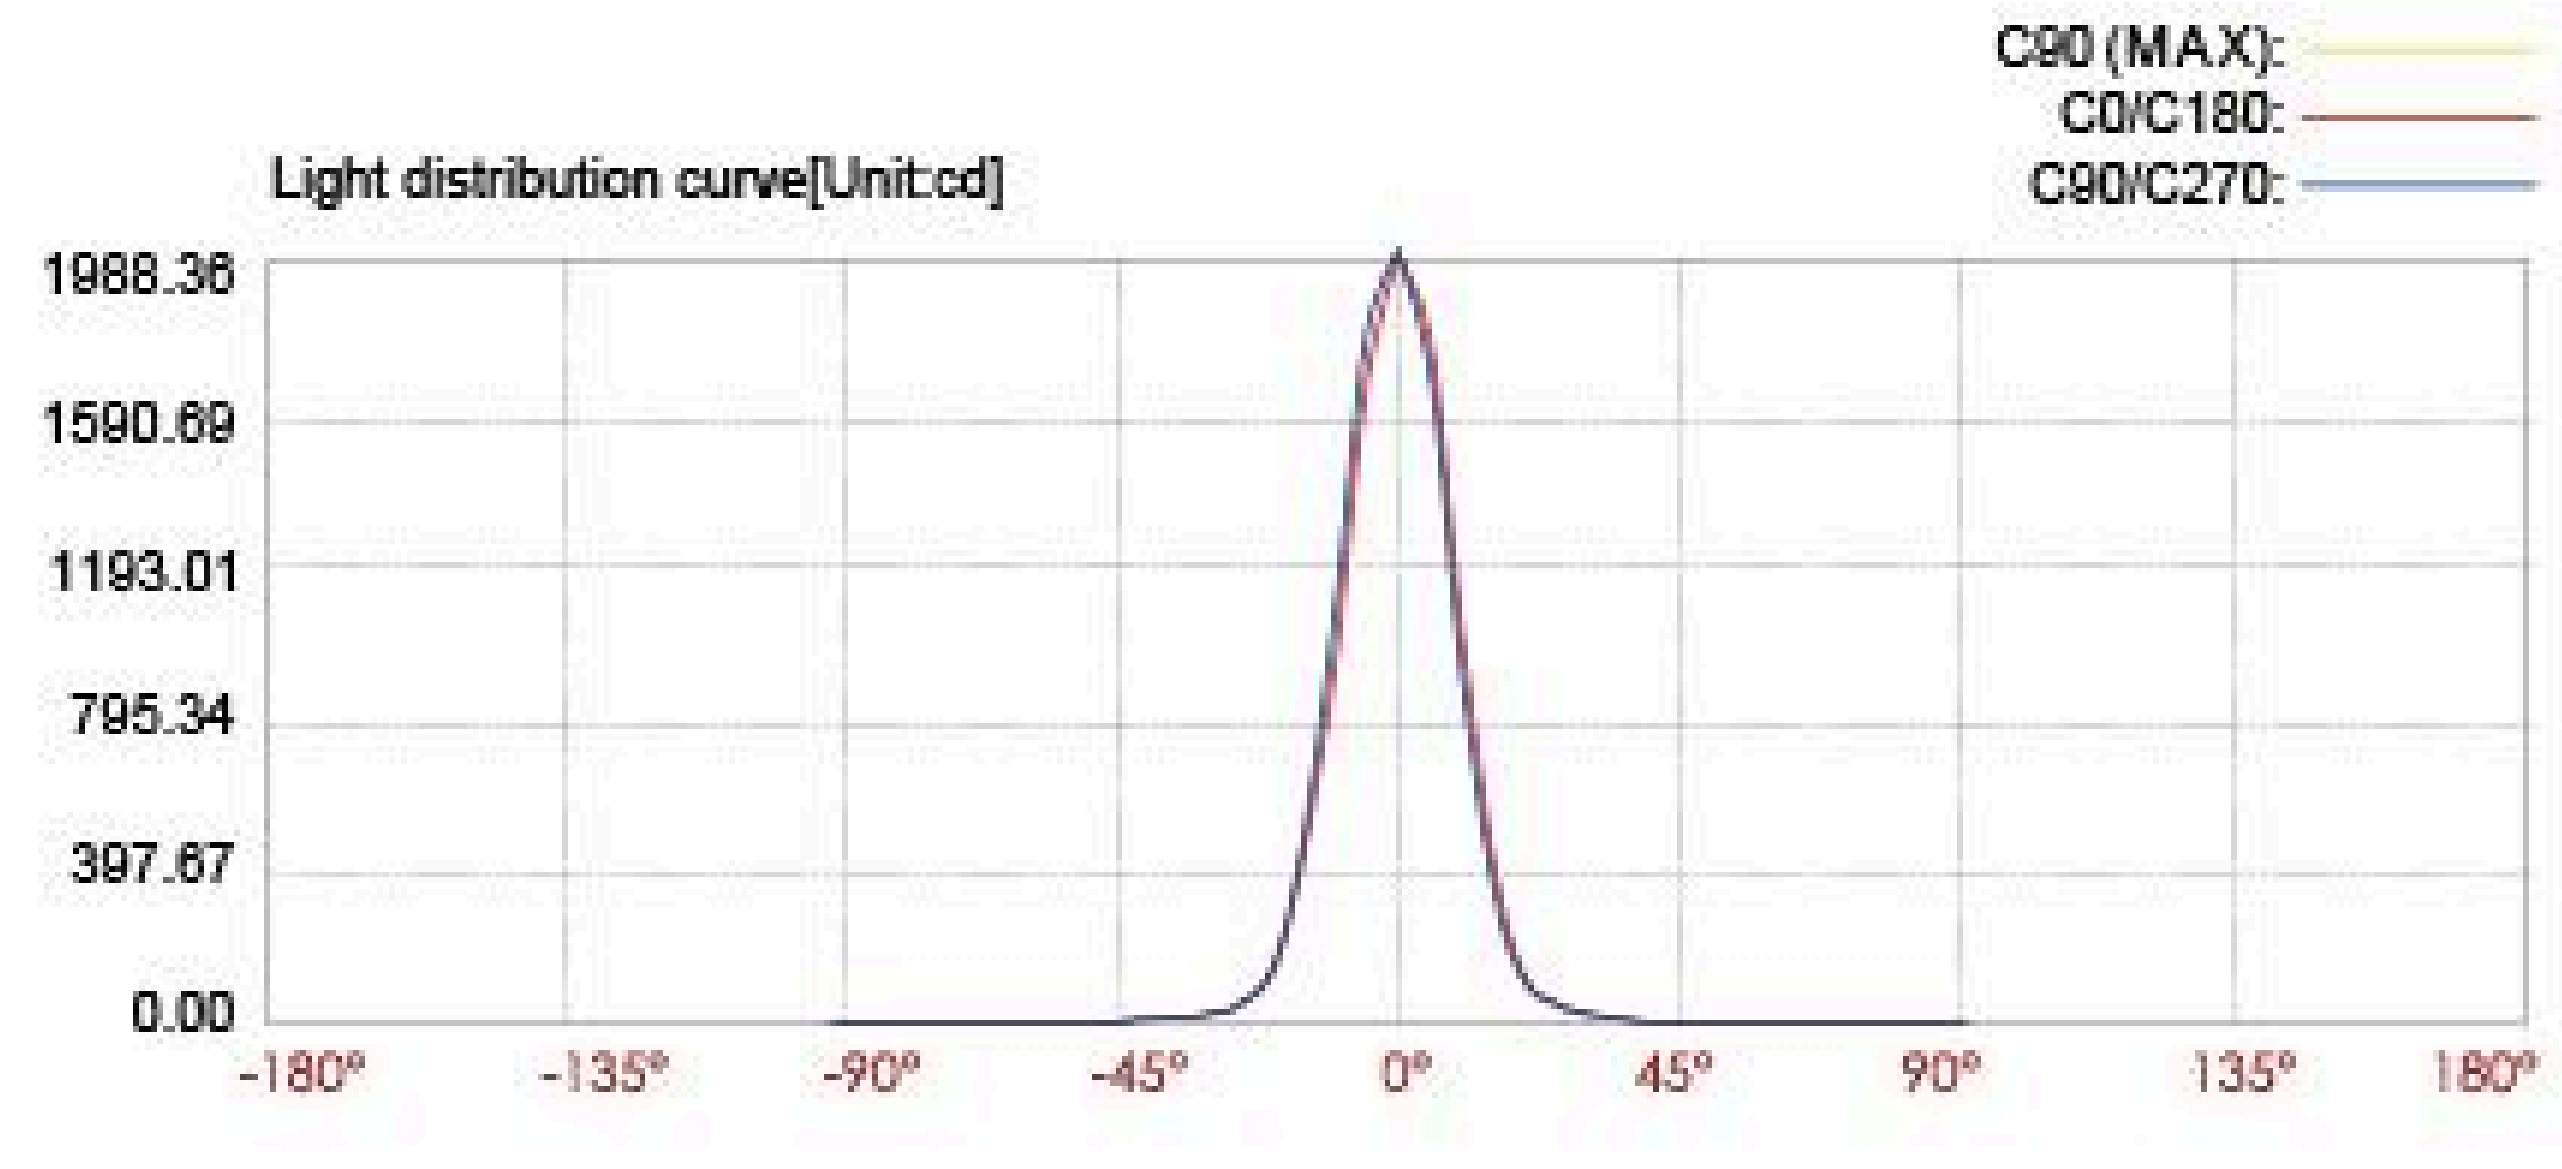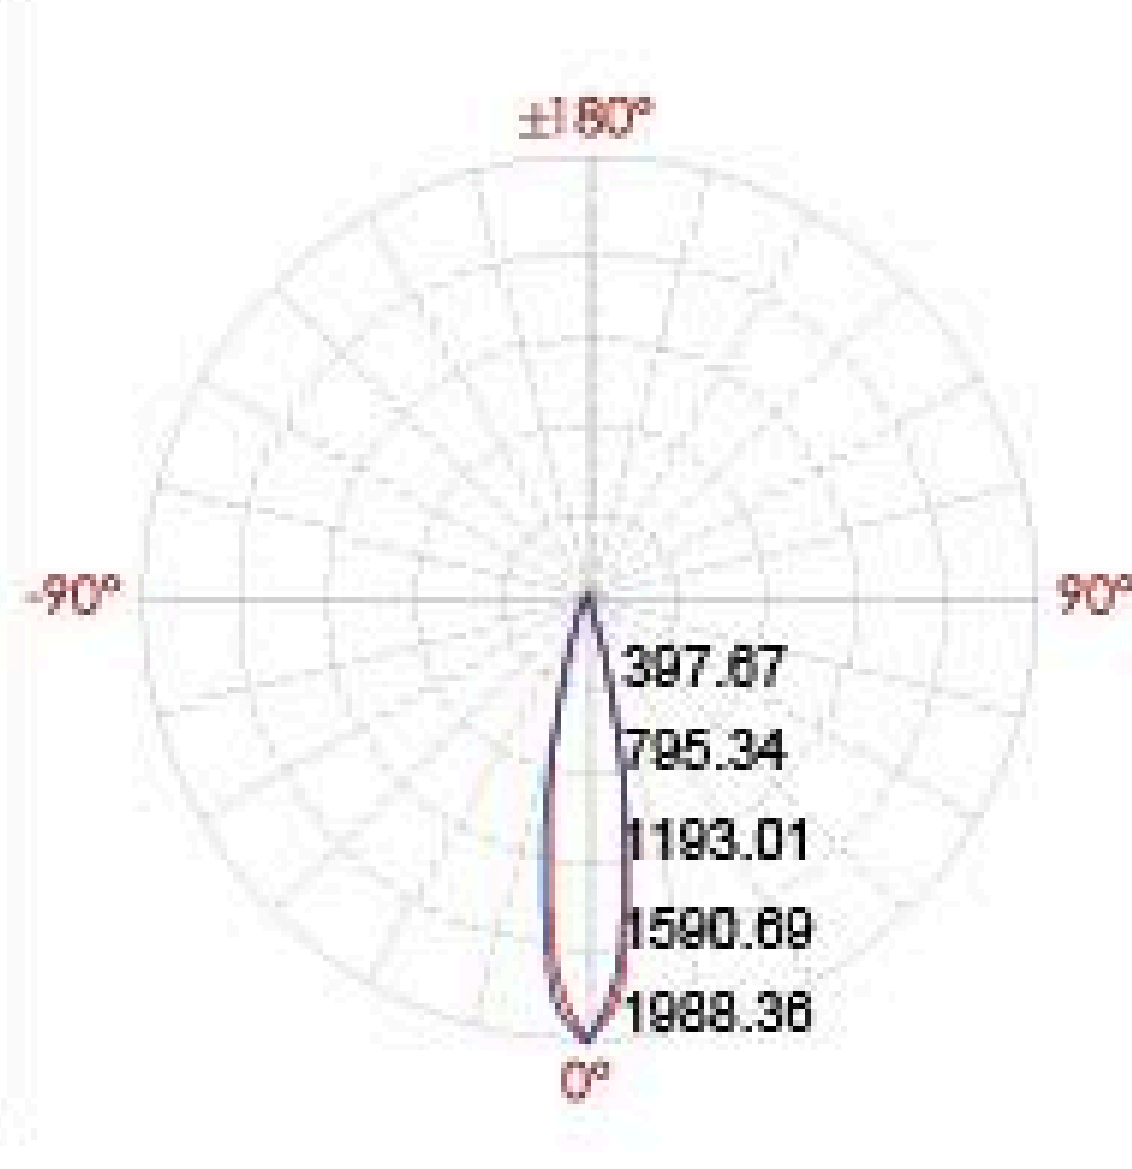

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	494.55 LUX	0.7m	0.7m
4m	123.64 LUX	1.4m	1.4m
6m	54.95 LUX	2.1m	2.1m
8m	30.91 LUX	2.8m	2.9m
10m	19.78 LUX	3.5m	3.6m
12m	13.74 LUX	4.2m	4.3m

Ver.Spread:20.0 Horiz.Spread:20.2