


07EBE2ED3256 (TWO SIDE)

Light Source	32x1W
Selected Degree (°)θ1/2	92° x 88°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1708 240V=180
Consumption (W)	24V/240V=41
Luminance (LM)	WW=1287x2
IK	02

Linear Drawing

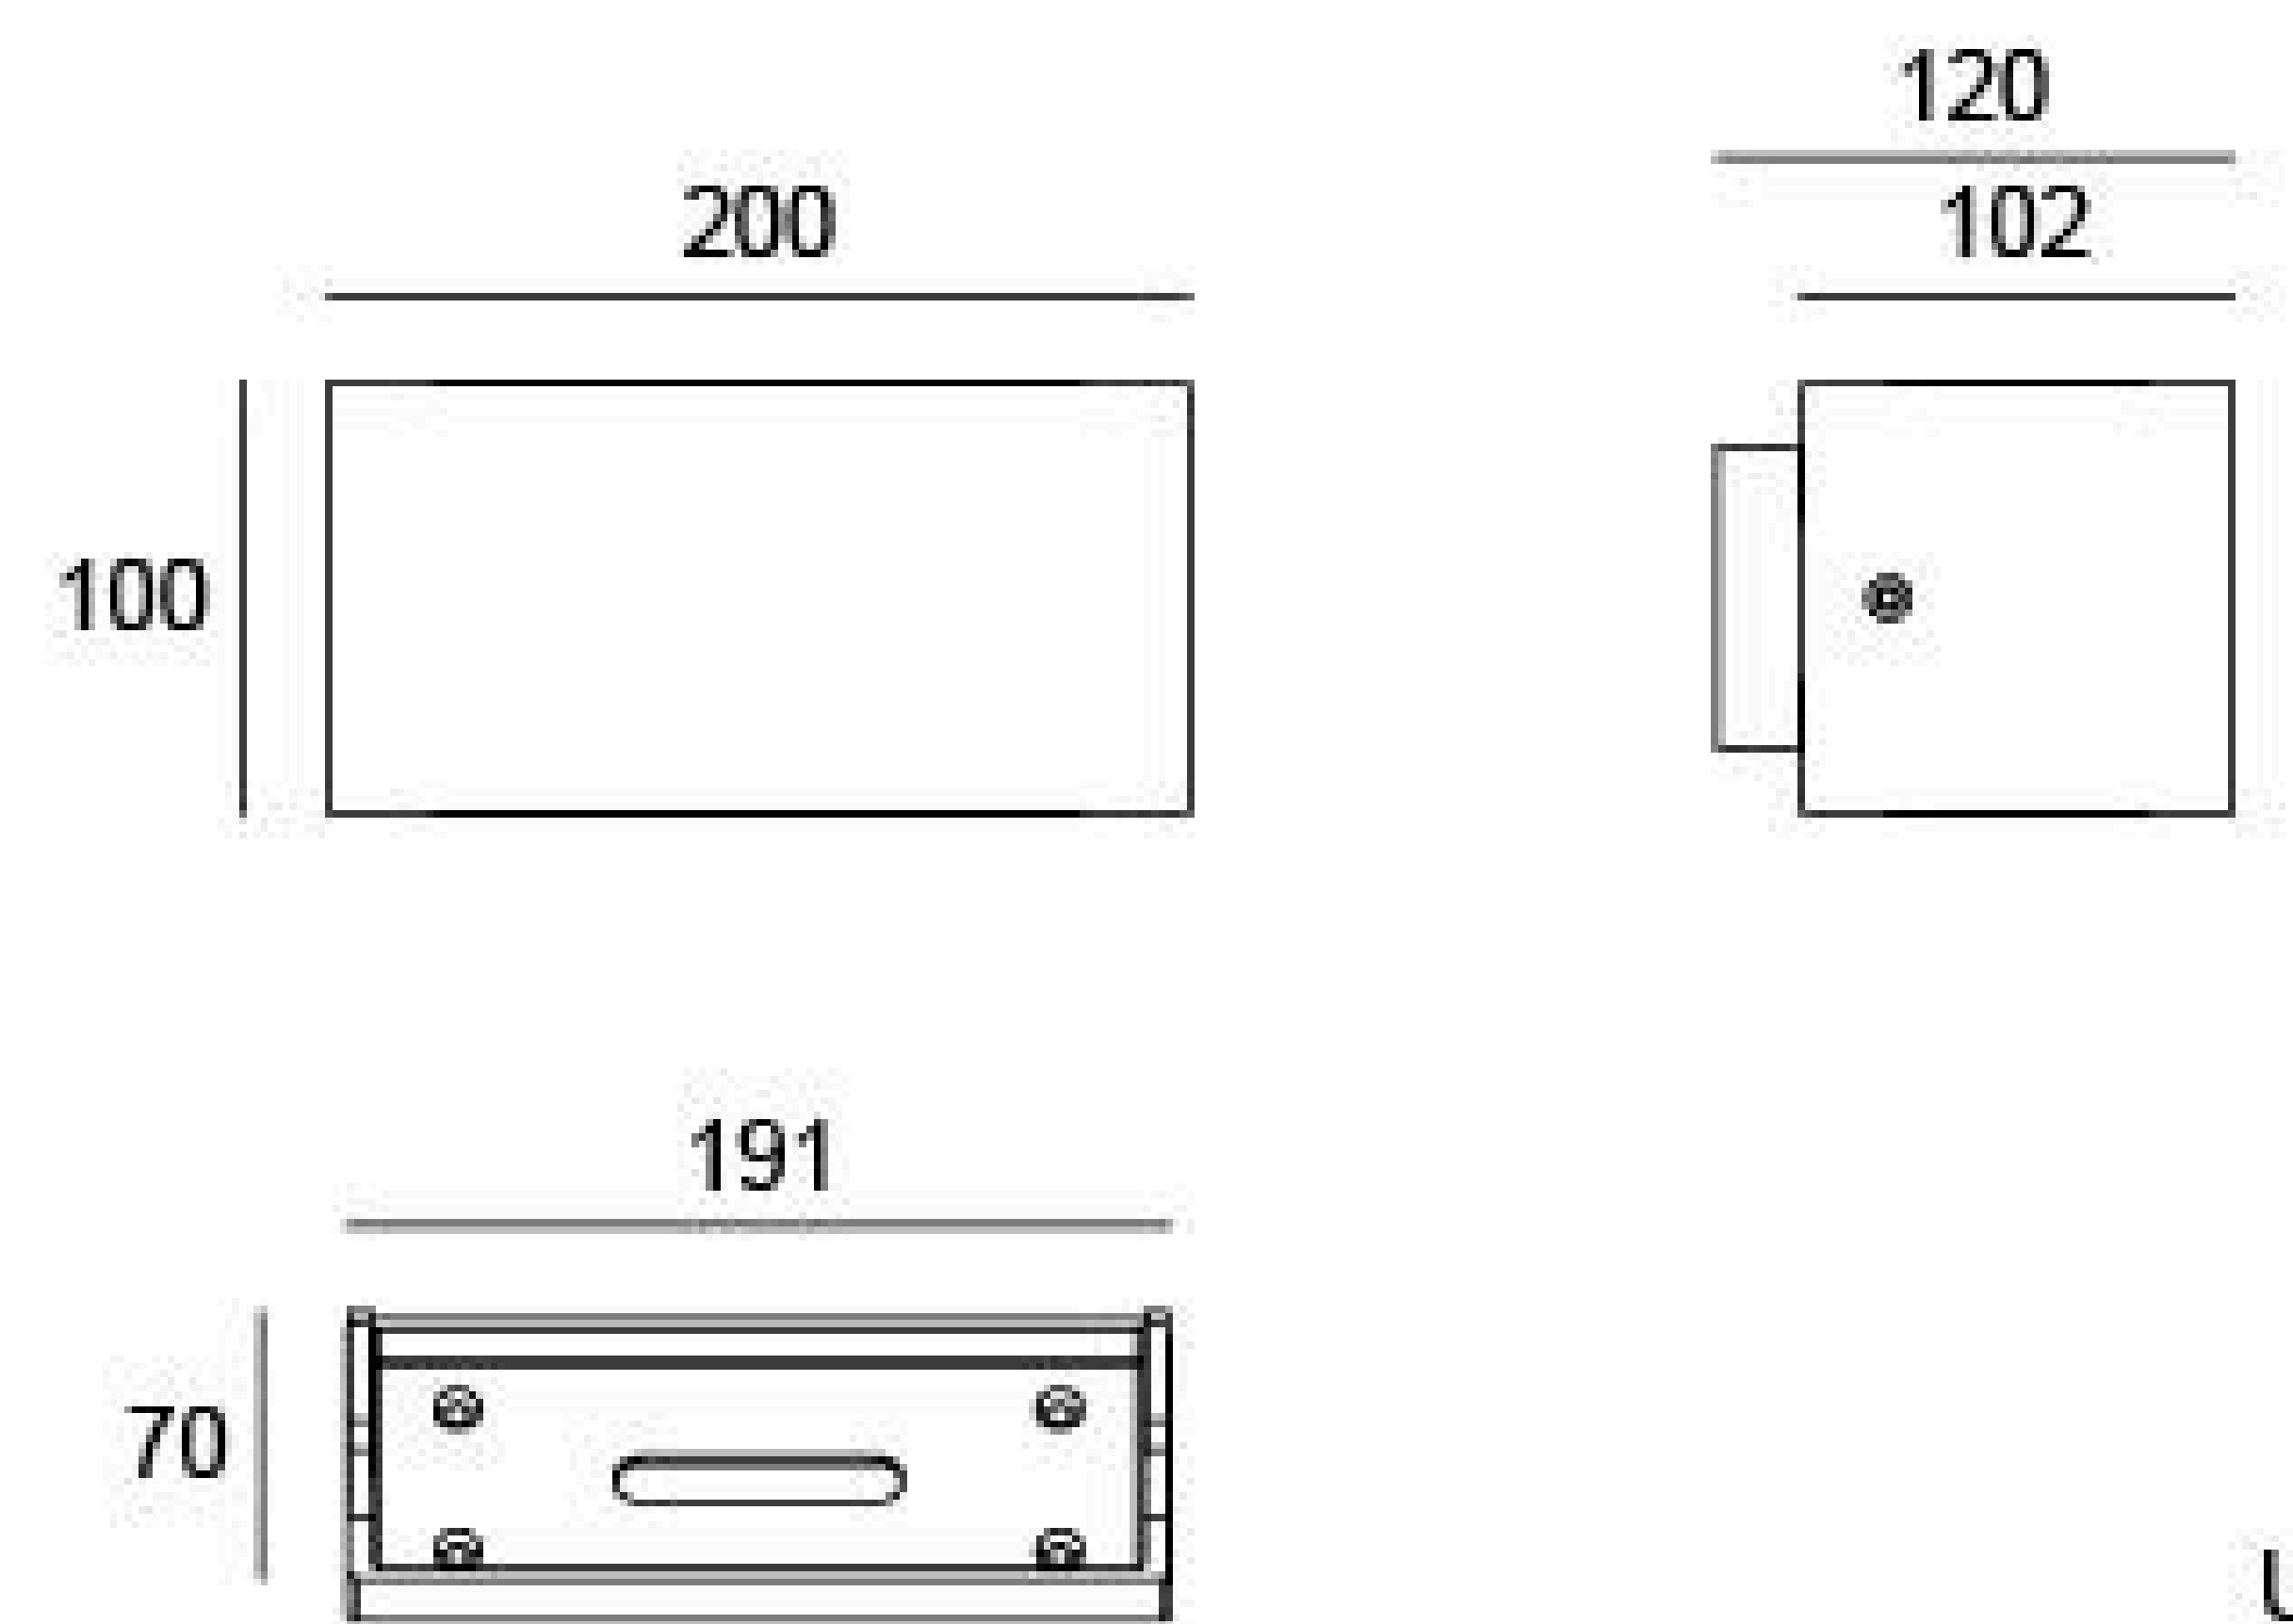


Unit: mm

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary

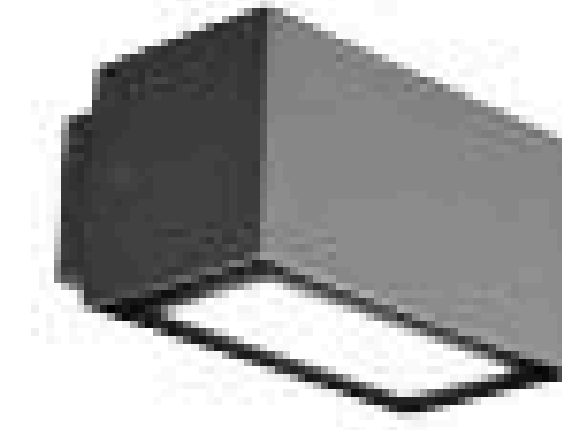

Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005



Smoke Grey
KAP 7043





Sanded Bronze
KAP 7008

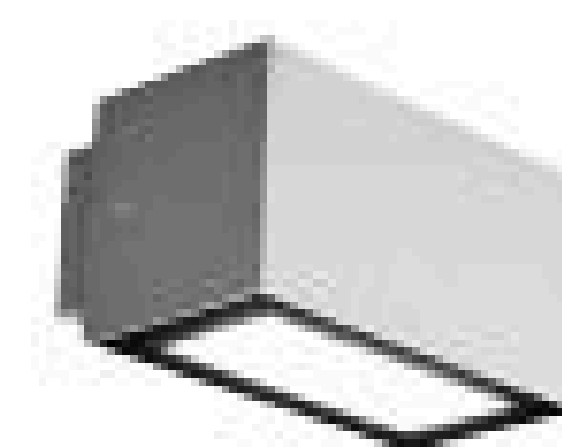



Sanded White
RAL 9003

Diagram of Instruction

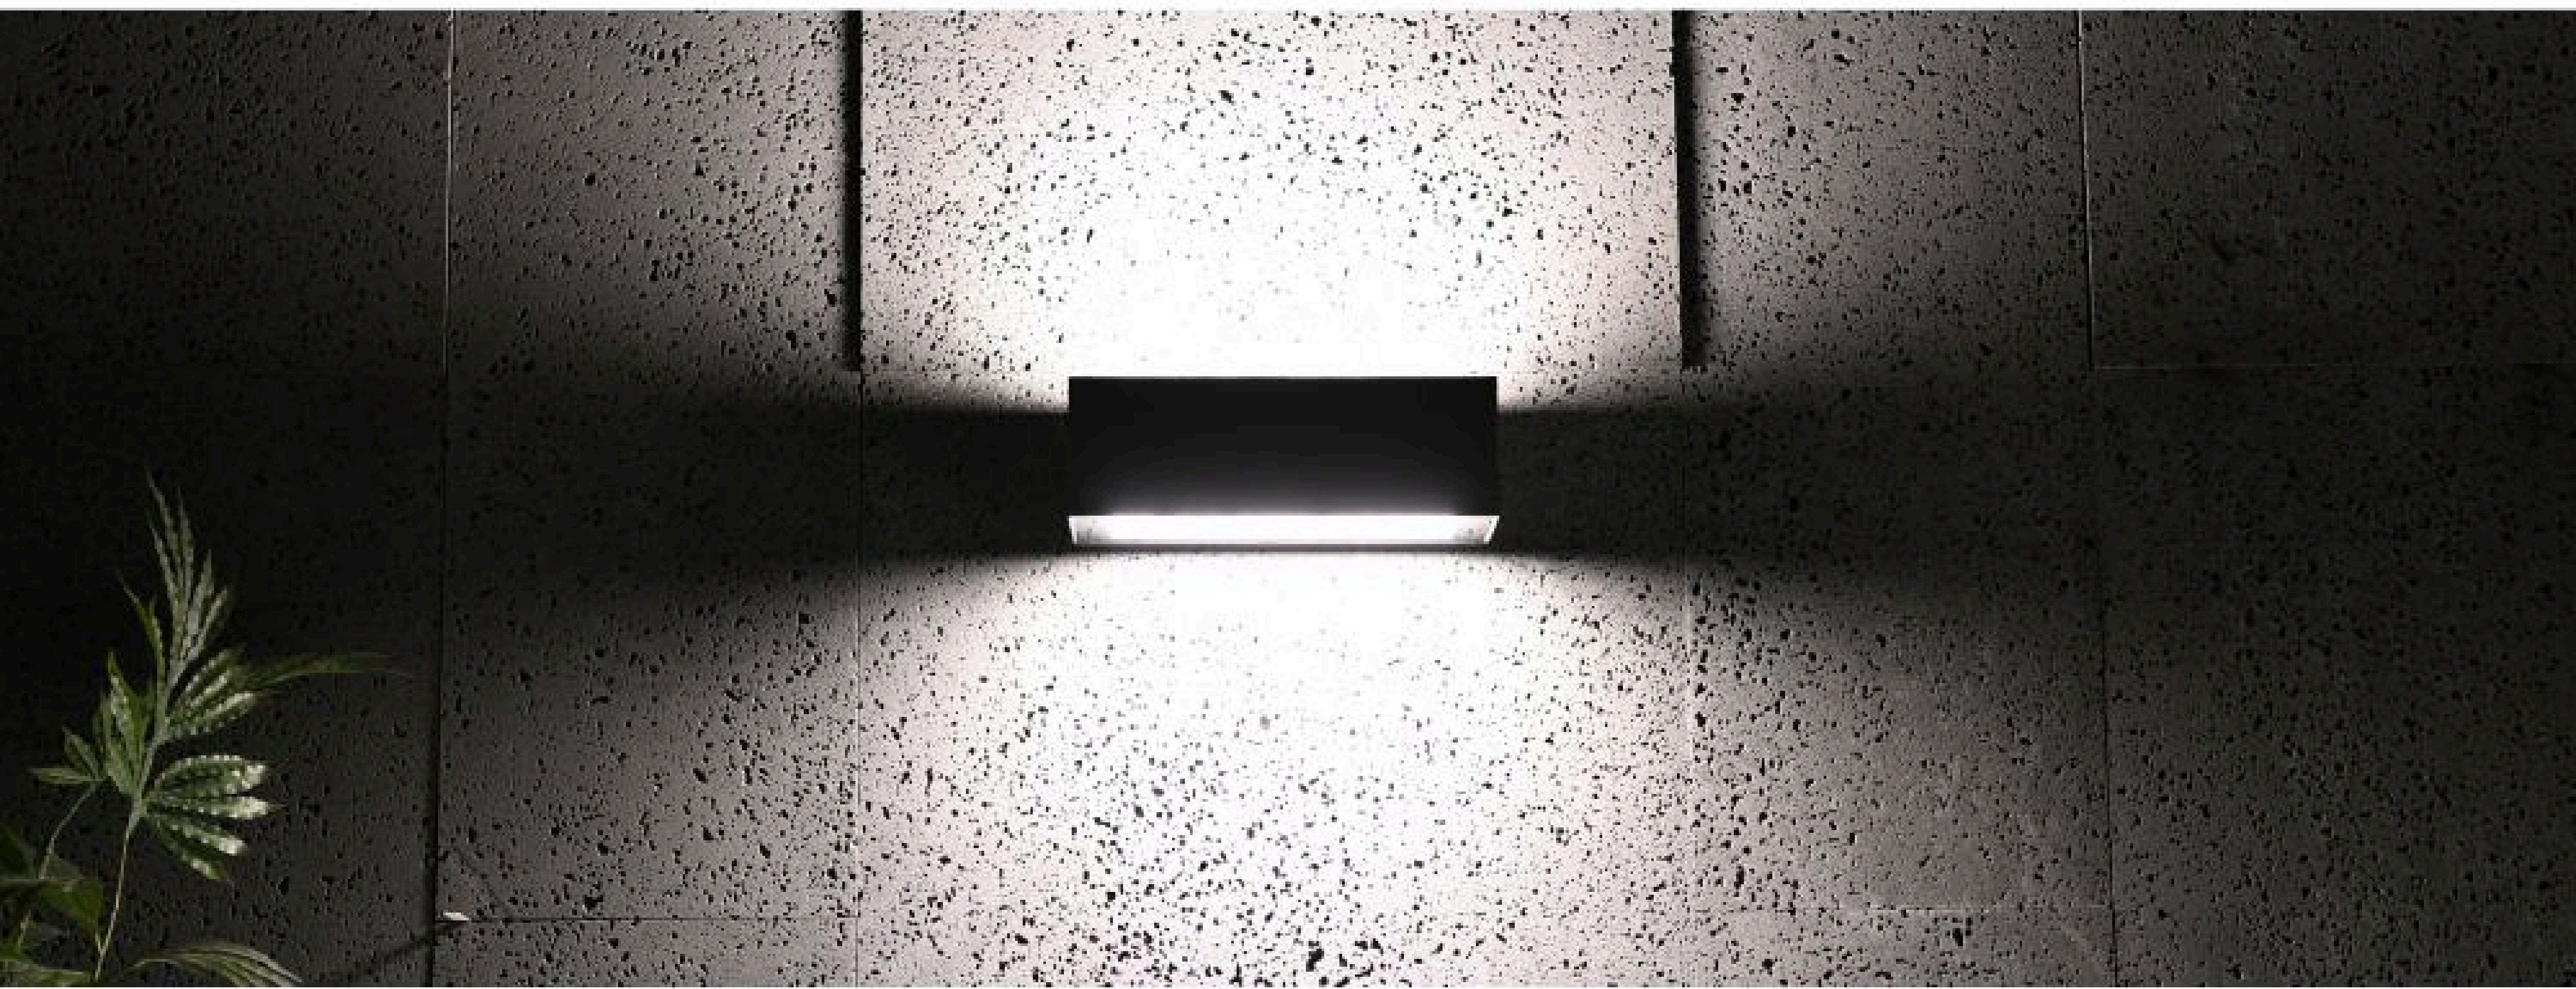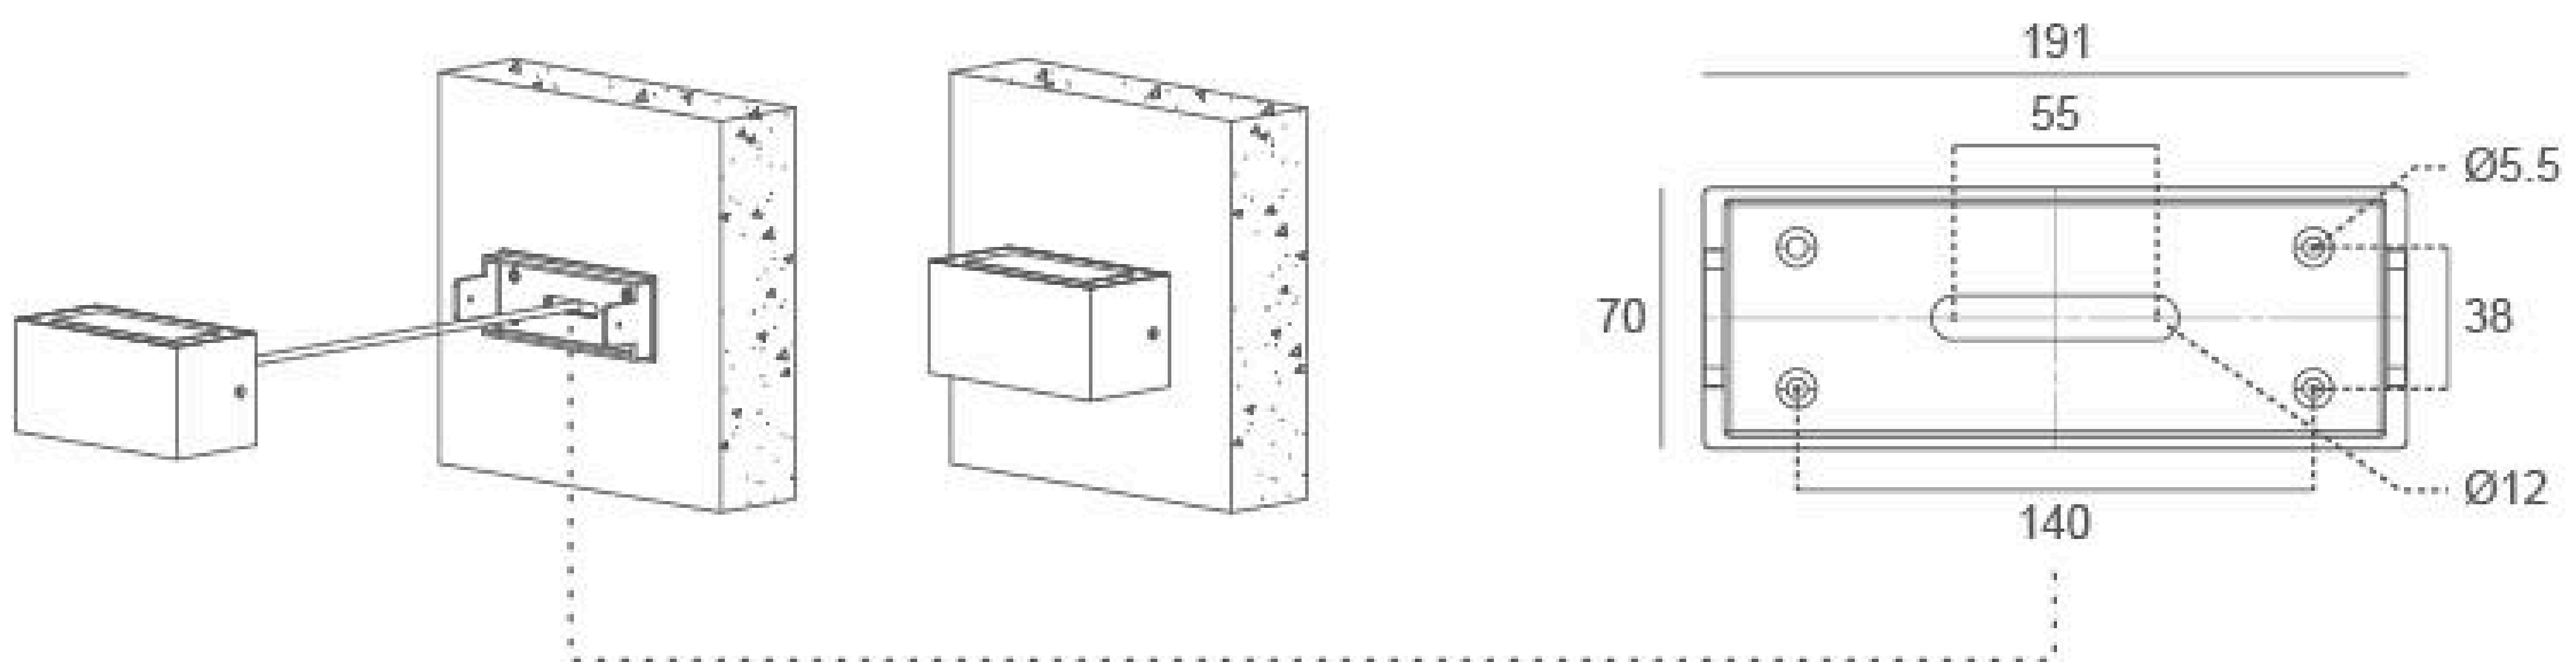

Photometric

12m	3.81 LUX
11m	
10m	5.48 LUX
9m	
8m	8.56 LUX
7m	
6m	15.22 LUX
5m	
4m	34.25 LUX
3m	
2m	136.99 LUX
1m	

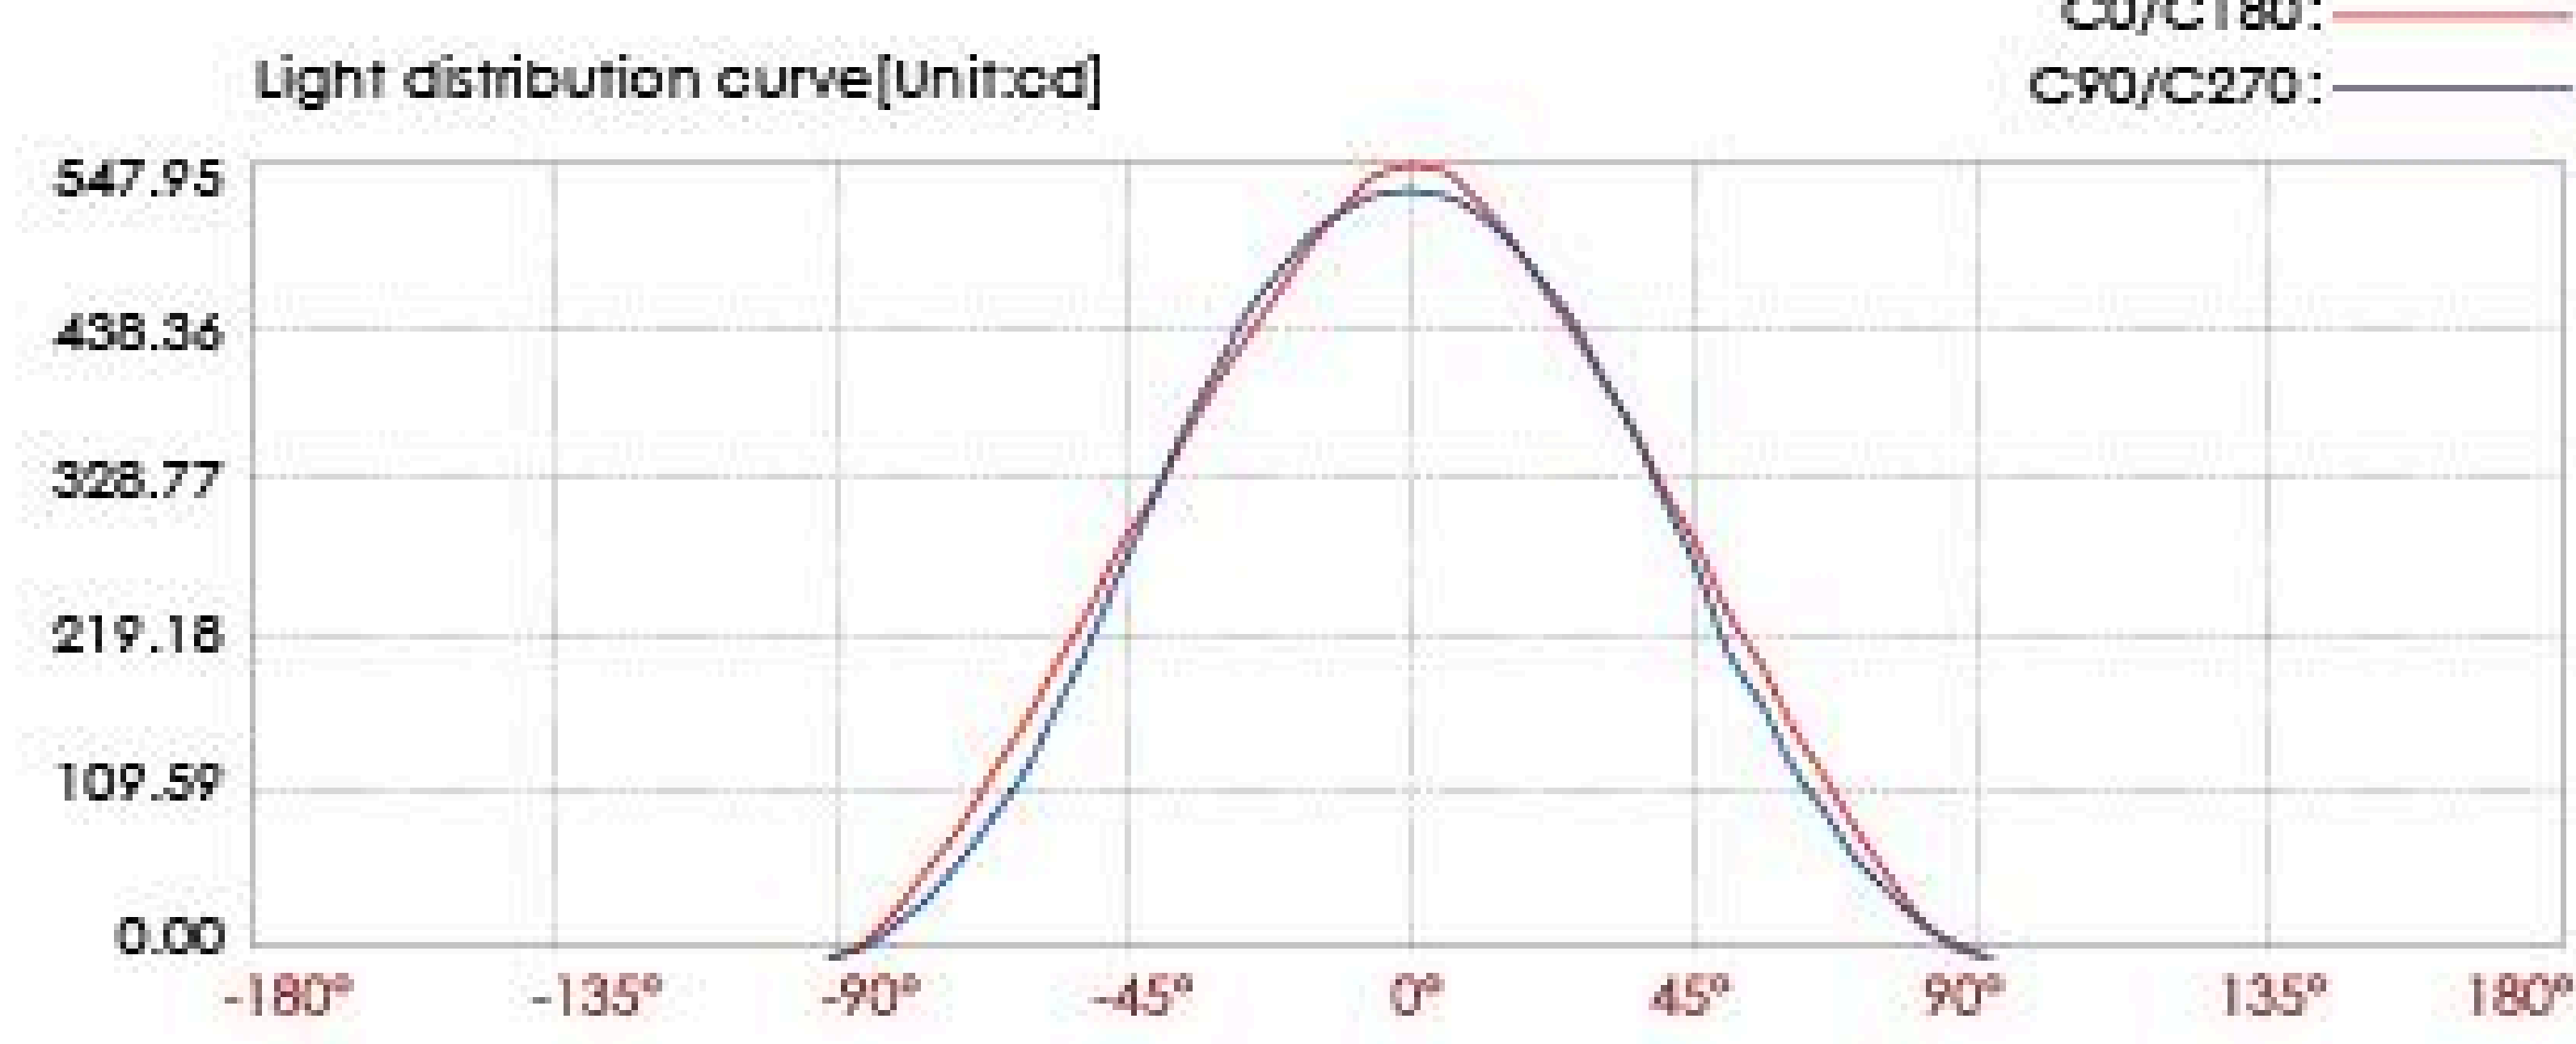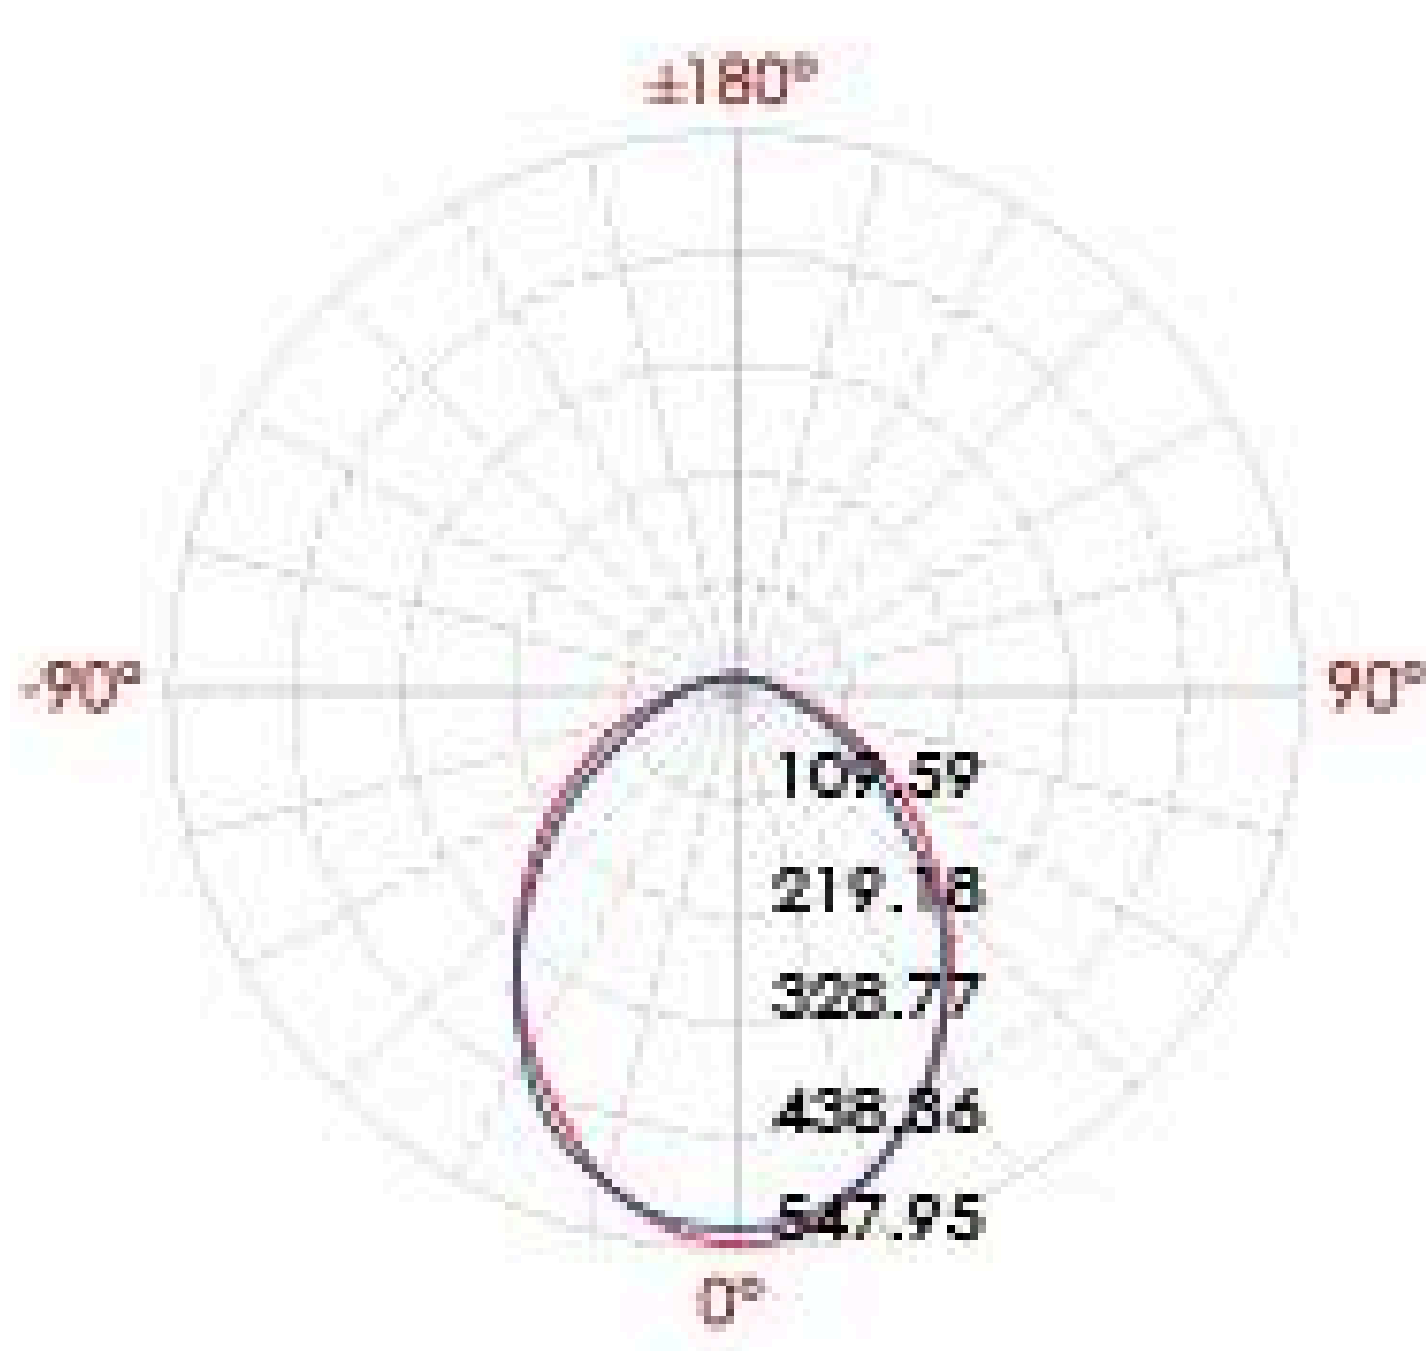

Center beam LUX	Beam width V	H
2m	4.2m	3.9m
4m	8.3m	7.8m
6m	12.5m	11.7m
8m	16.6m	15.6m
10m	20.8m	19.5m
12m	25.0m	23.4m

Ver.Spread:92.3 Horiz.Spread:88.5