


07EHR0176 (ONE SIDE)

Light Source	1x40W
Reflector	R16
Selected Degree (°)θ1/2	25°
Input Voltage (V)	AC 120 240
Operating current (MA)	120V=372 240V=187
Consumption (W)	120V=44.8 240V=44.5
Luminance (LM)	CW=4259 WW=4030
IK	06

Linear Drawing

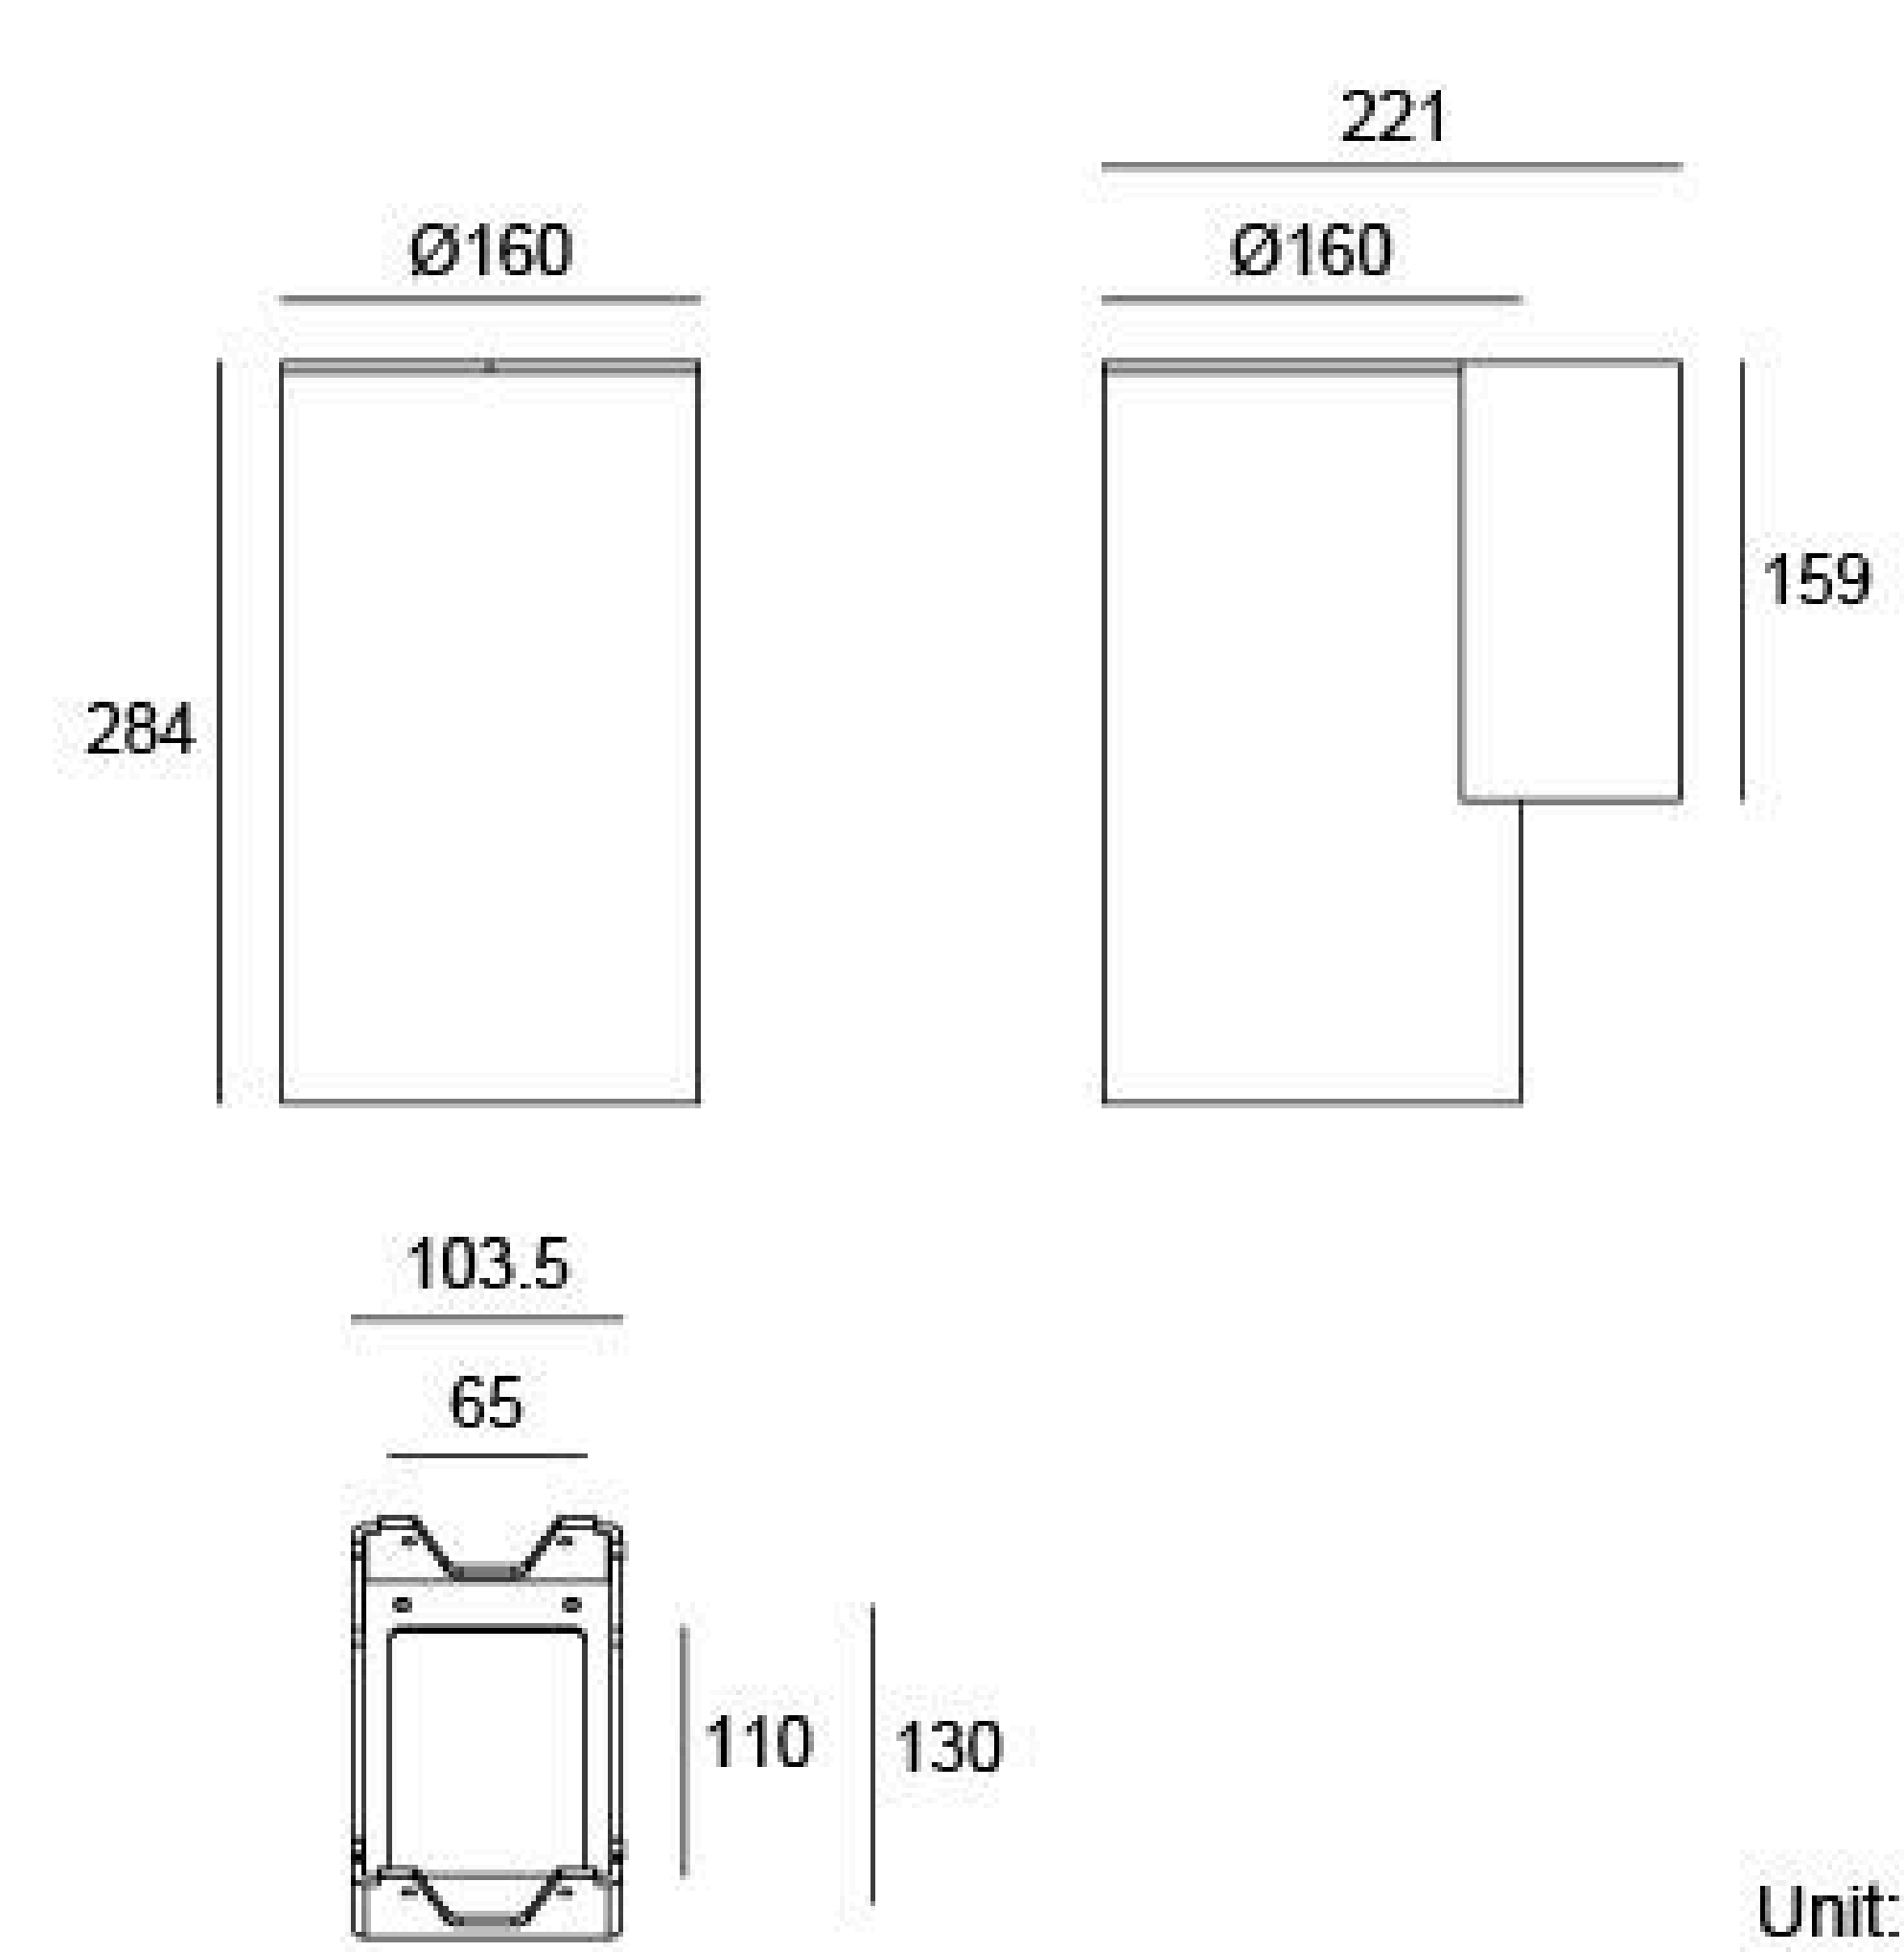

Unit: mm

Specification

Housing	Extruded aluminum alloy #6063 powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	PC
Gasket	Waterproof silicone gasket
LED Type	COB
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 120V/240V: H05RN-F 3x1.0mm², L=0.3m

Lens (Item Code) Referenced Degree(°)θ1/2



12° 25° 38°

R16

Painting Color

Primary



Secondary

- Sanded White RAL 9003
- Sanded Dark Grey KAP 7037
- Sanded Bronze KAP 7008



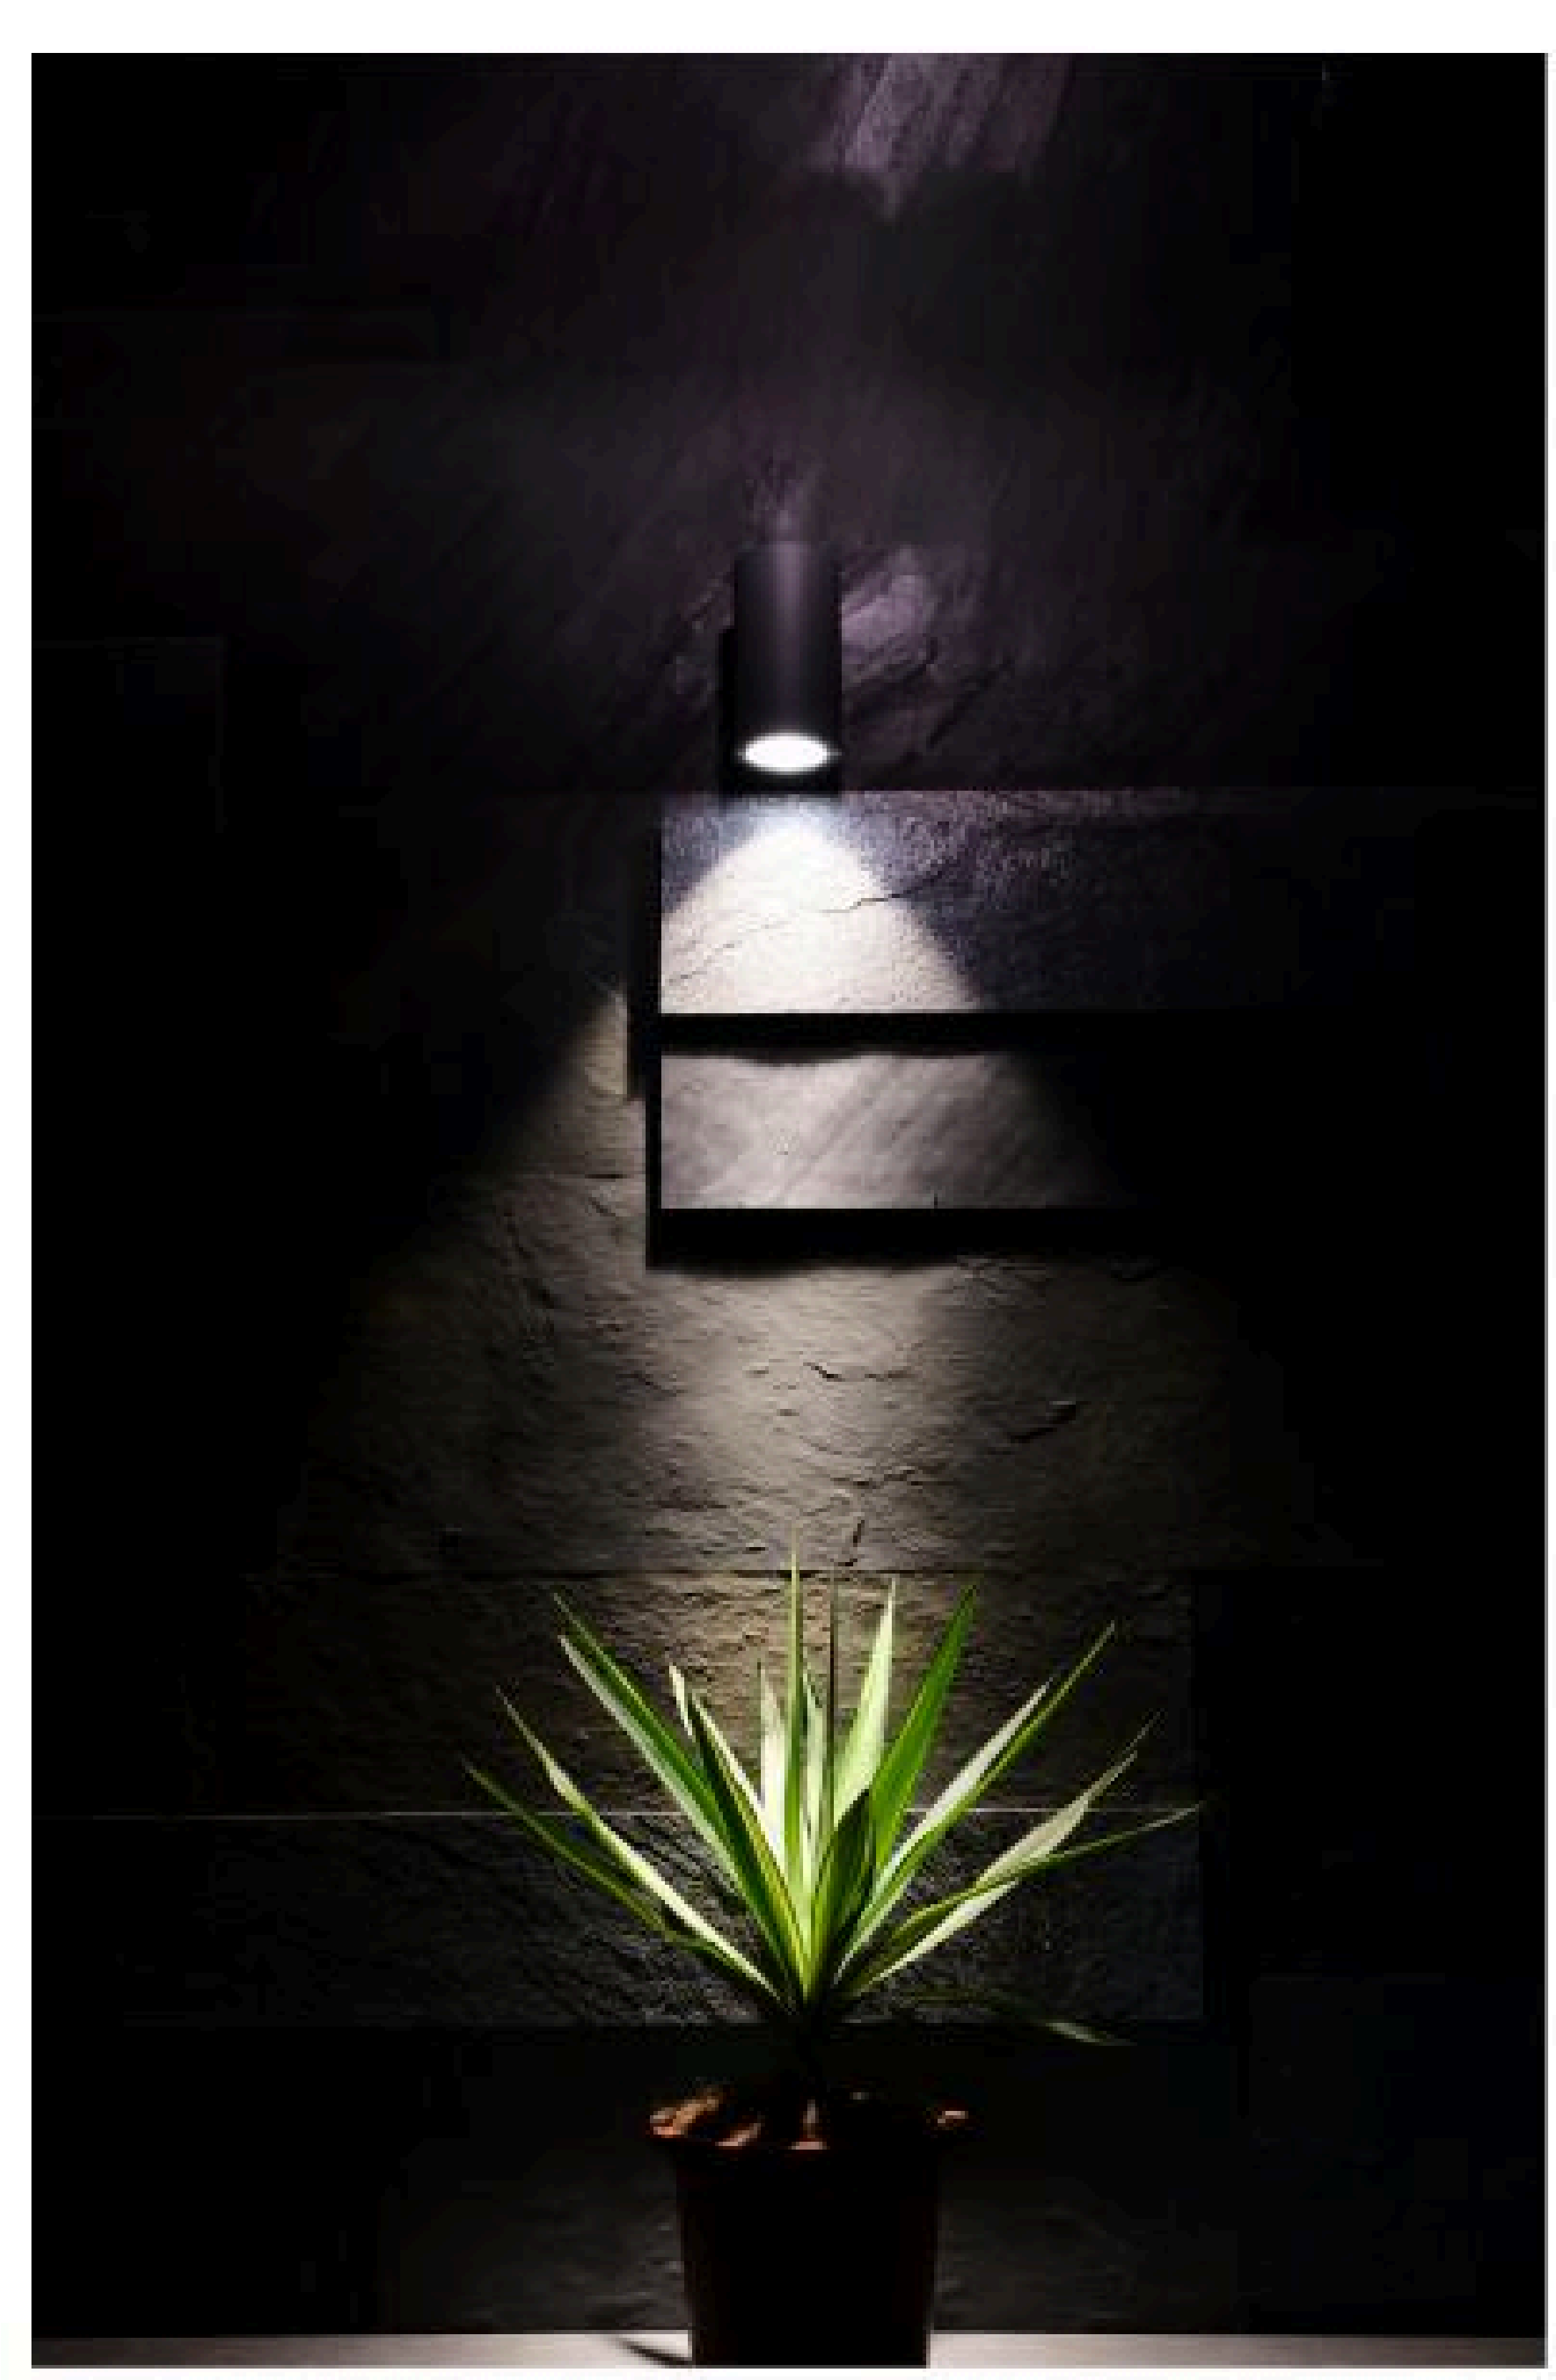


Diagram of Instruction

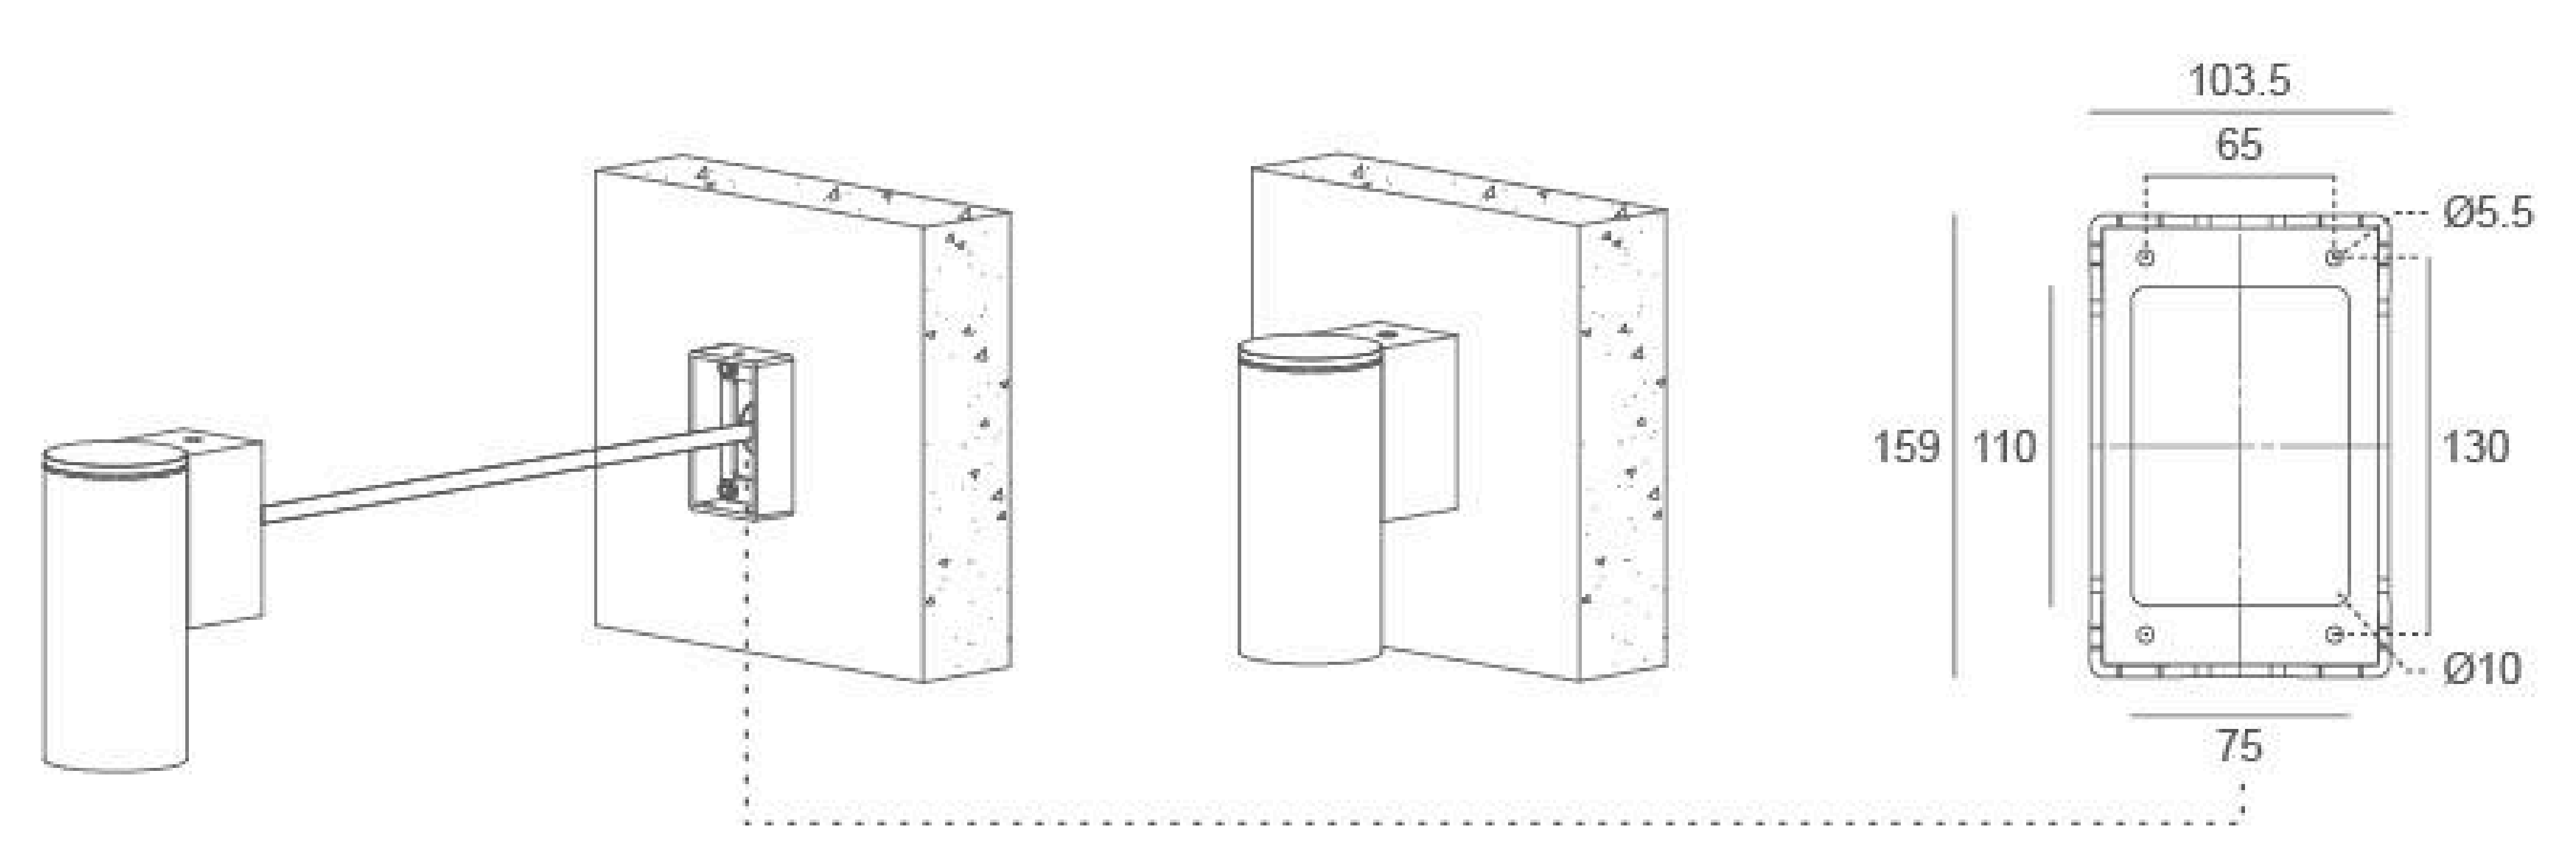

Photometric

12m	99.15 LUX
11m	
10m	142.77 LUX
9m	
8m	223.09 LUX
7m	
6m	396.60 LUX
5m	
4m	892.34 LUX
3m	
2m	3569.37 LUX
1m	

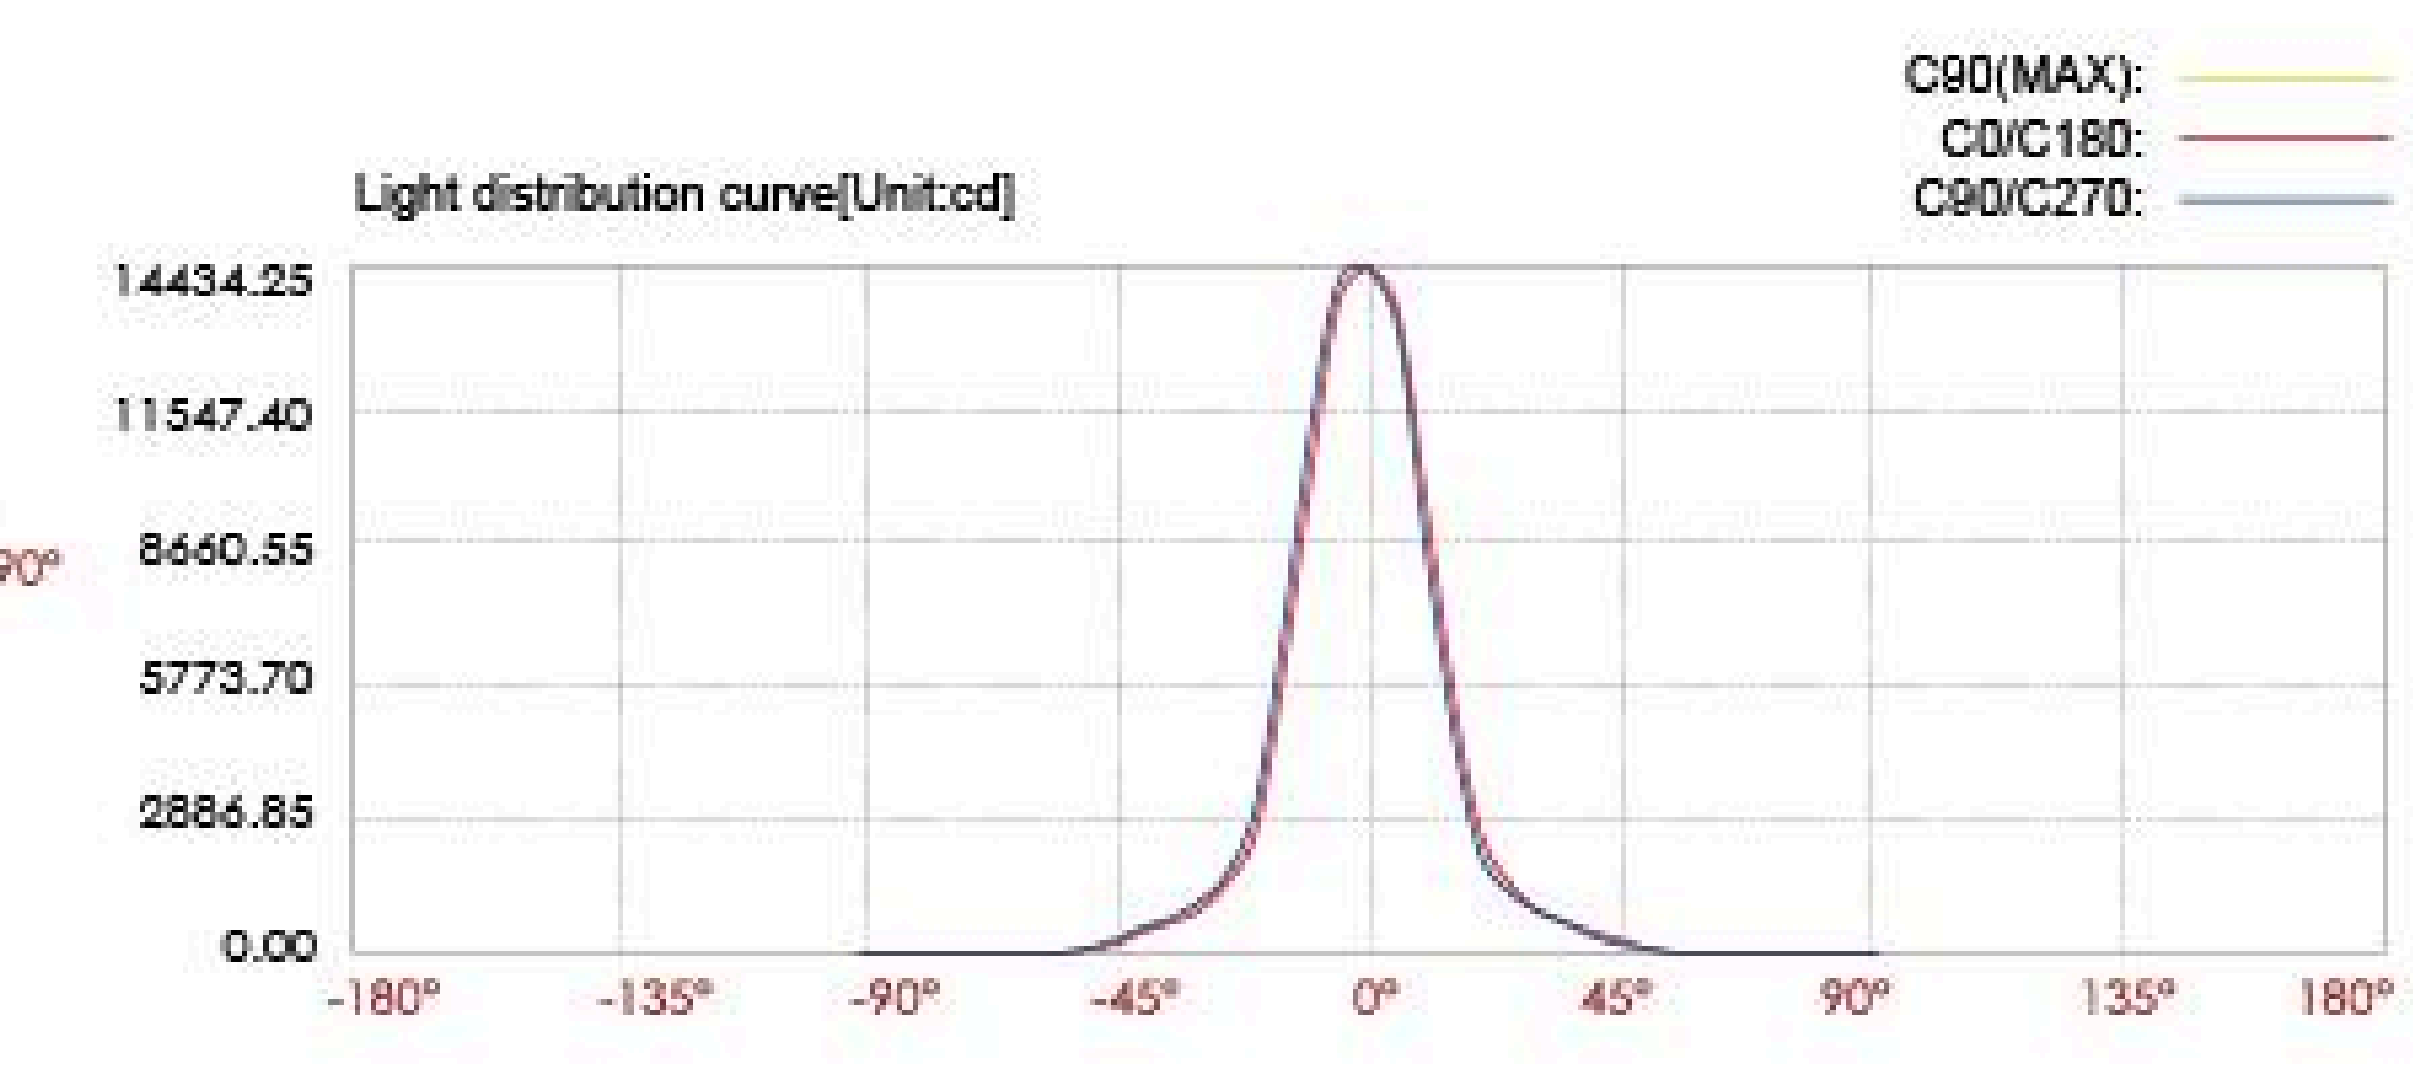

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	3569.37 LUX	0.9m	0.9m
4m	892.34 LUX	1.8m	1.9m
6m	396.60 LUX	2.8m	2.8m
8m	223.09 LUX	3.7m	3.7m
10m	142.77 LUX	4.6m	4.6m
12m	99.15 LUX	5.5m	5.6m

Ver.Spread:26.0 Horiz.Spread:26.1