


07FBE1ED2456 (ONE SIDE)

Light Source	24x1W
Selected Degree (°)θ1/2	92° x 88°
Input Voltage (V)	AC 240
Operating Current (MA)	240V=125
Consumption (W)	240V=27.8
Luminance (LM)	WW=2100
IK	03

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Linear Drawing

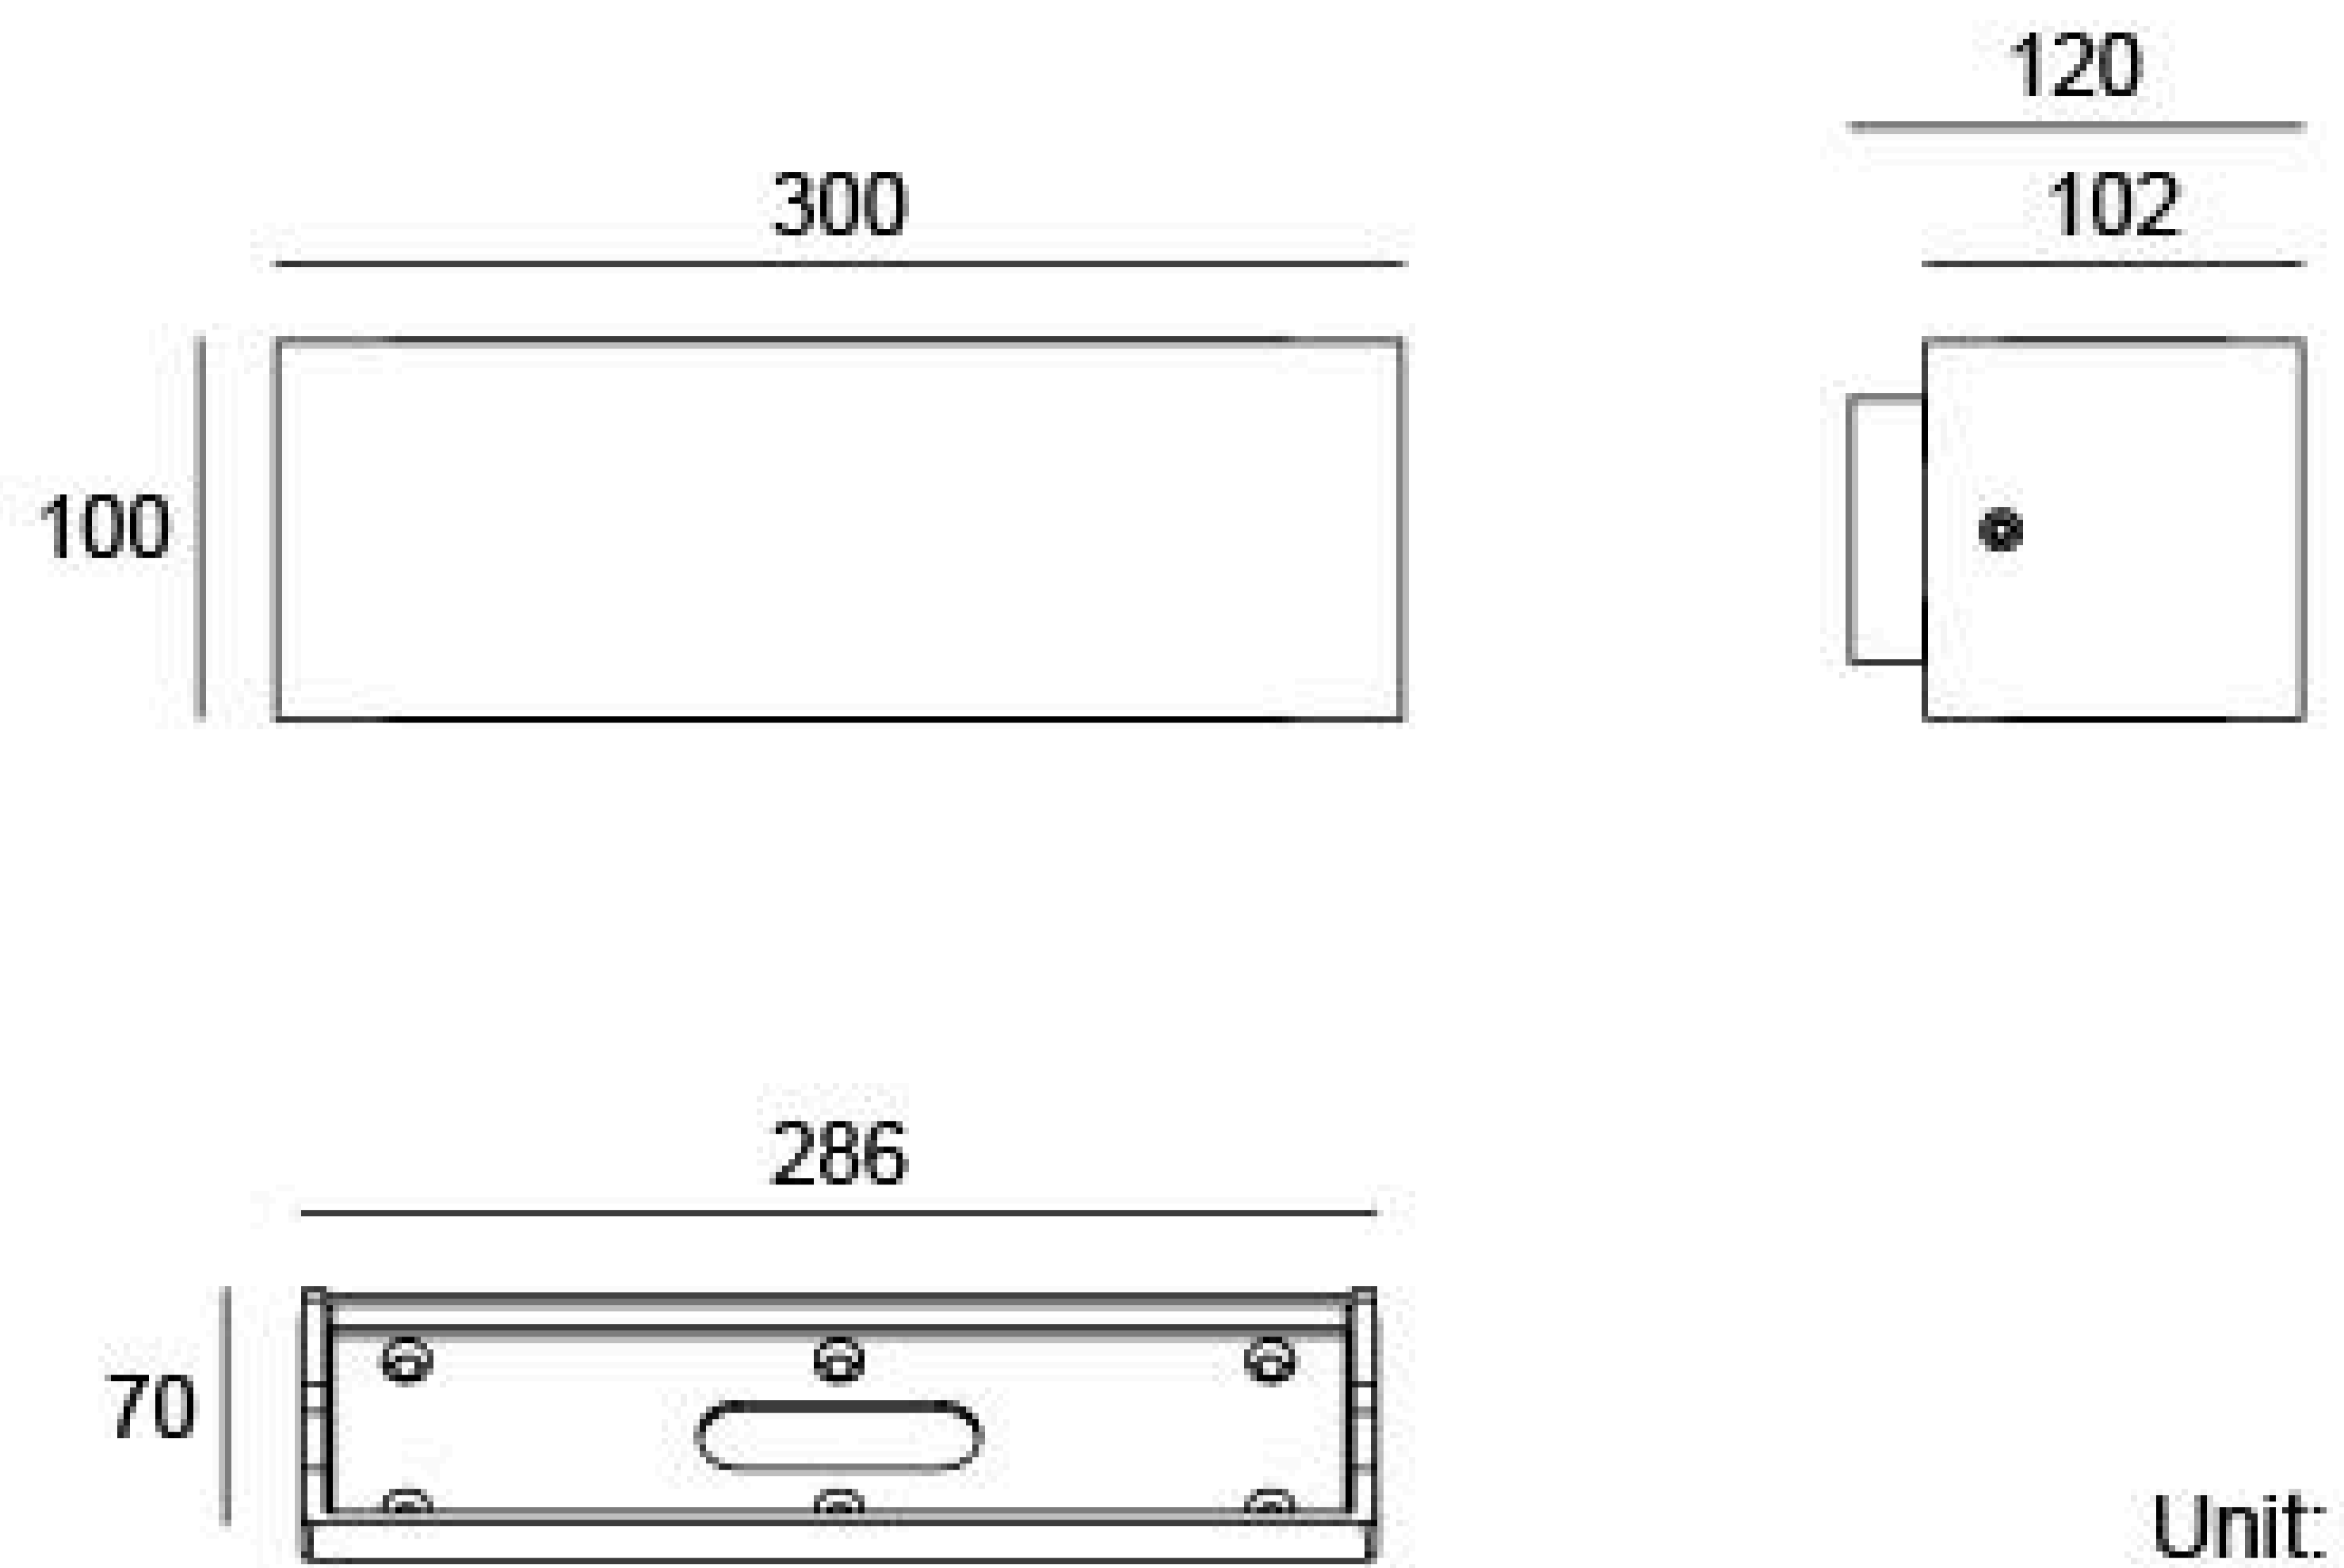


Unit: mm

Painting Color



Primary		Sanded Dark Grey KAP 7037
Secondary		Sanded Black RAL 9005
		Smoke Grey KAP 7043
		Sanded Bronze KAP 7008
		Sanded White RAL 9003

Diagram of Instruction

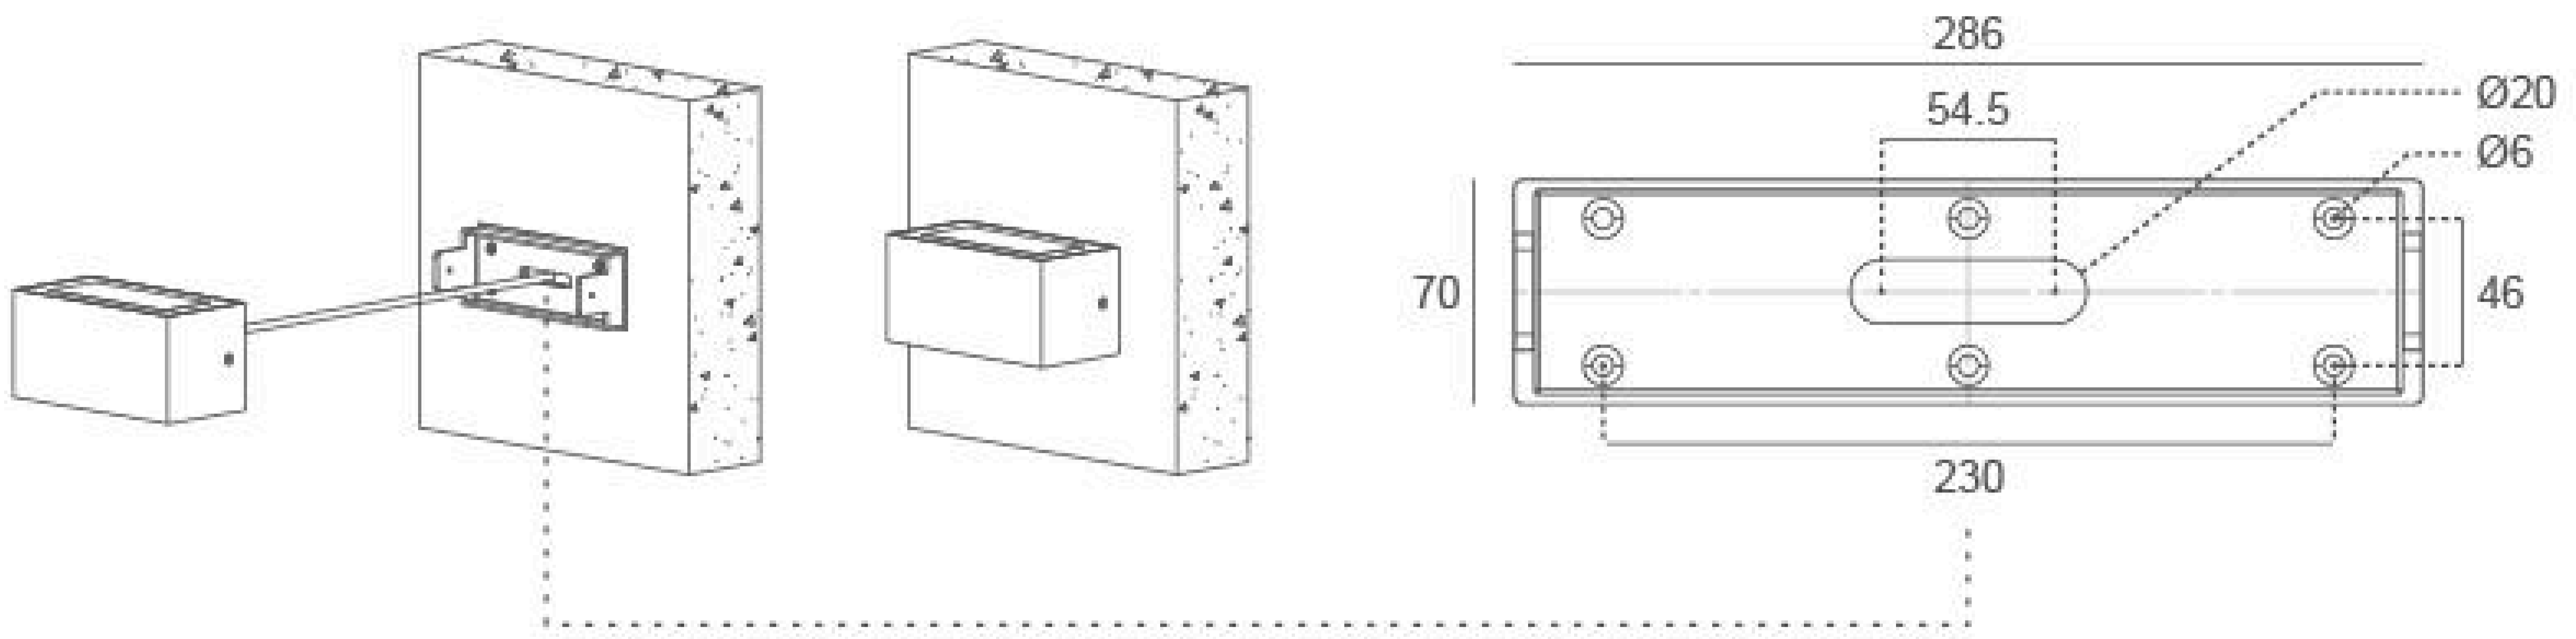

Photometric

12m	6.10 LUX
11m	
10m	8.78 LUX
9m	
8m	13.72 LUX
7m	
6m	24.39 LUX
5m	
4m	54.88 LUX
3m	
2m	219.53 LUX
1m	

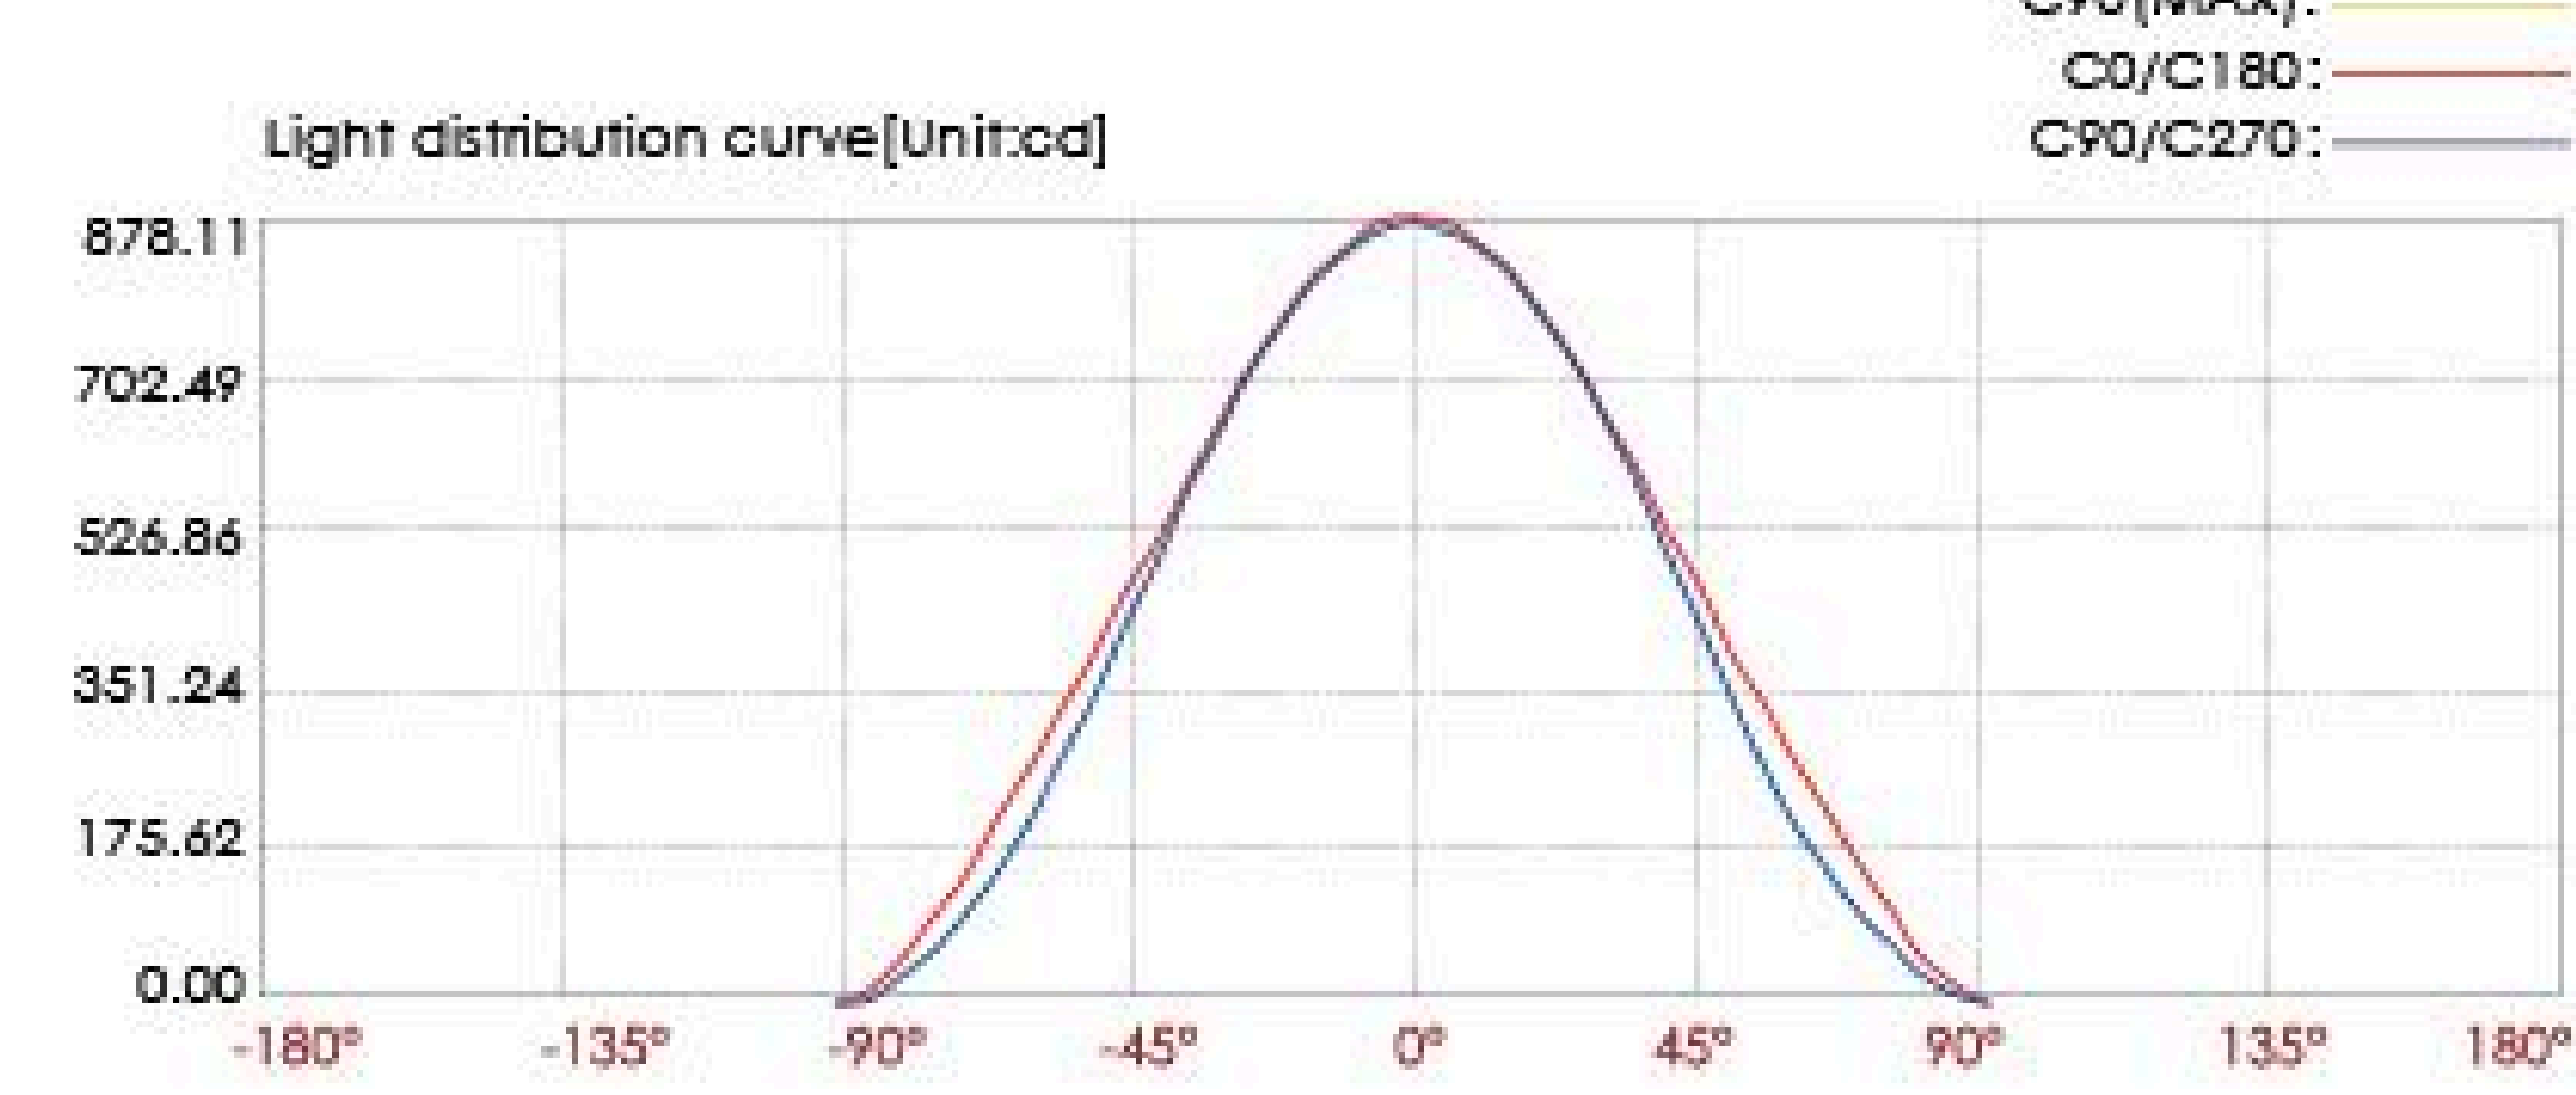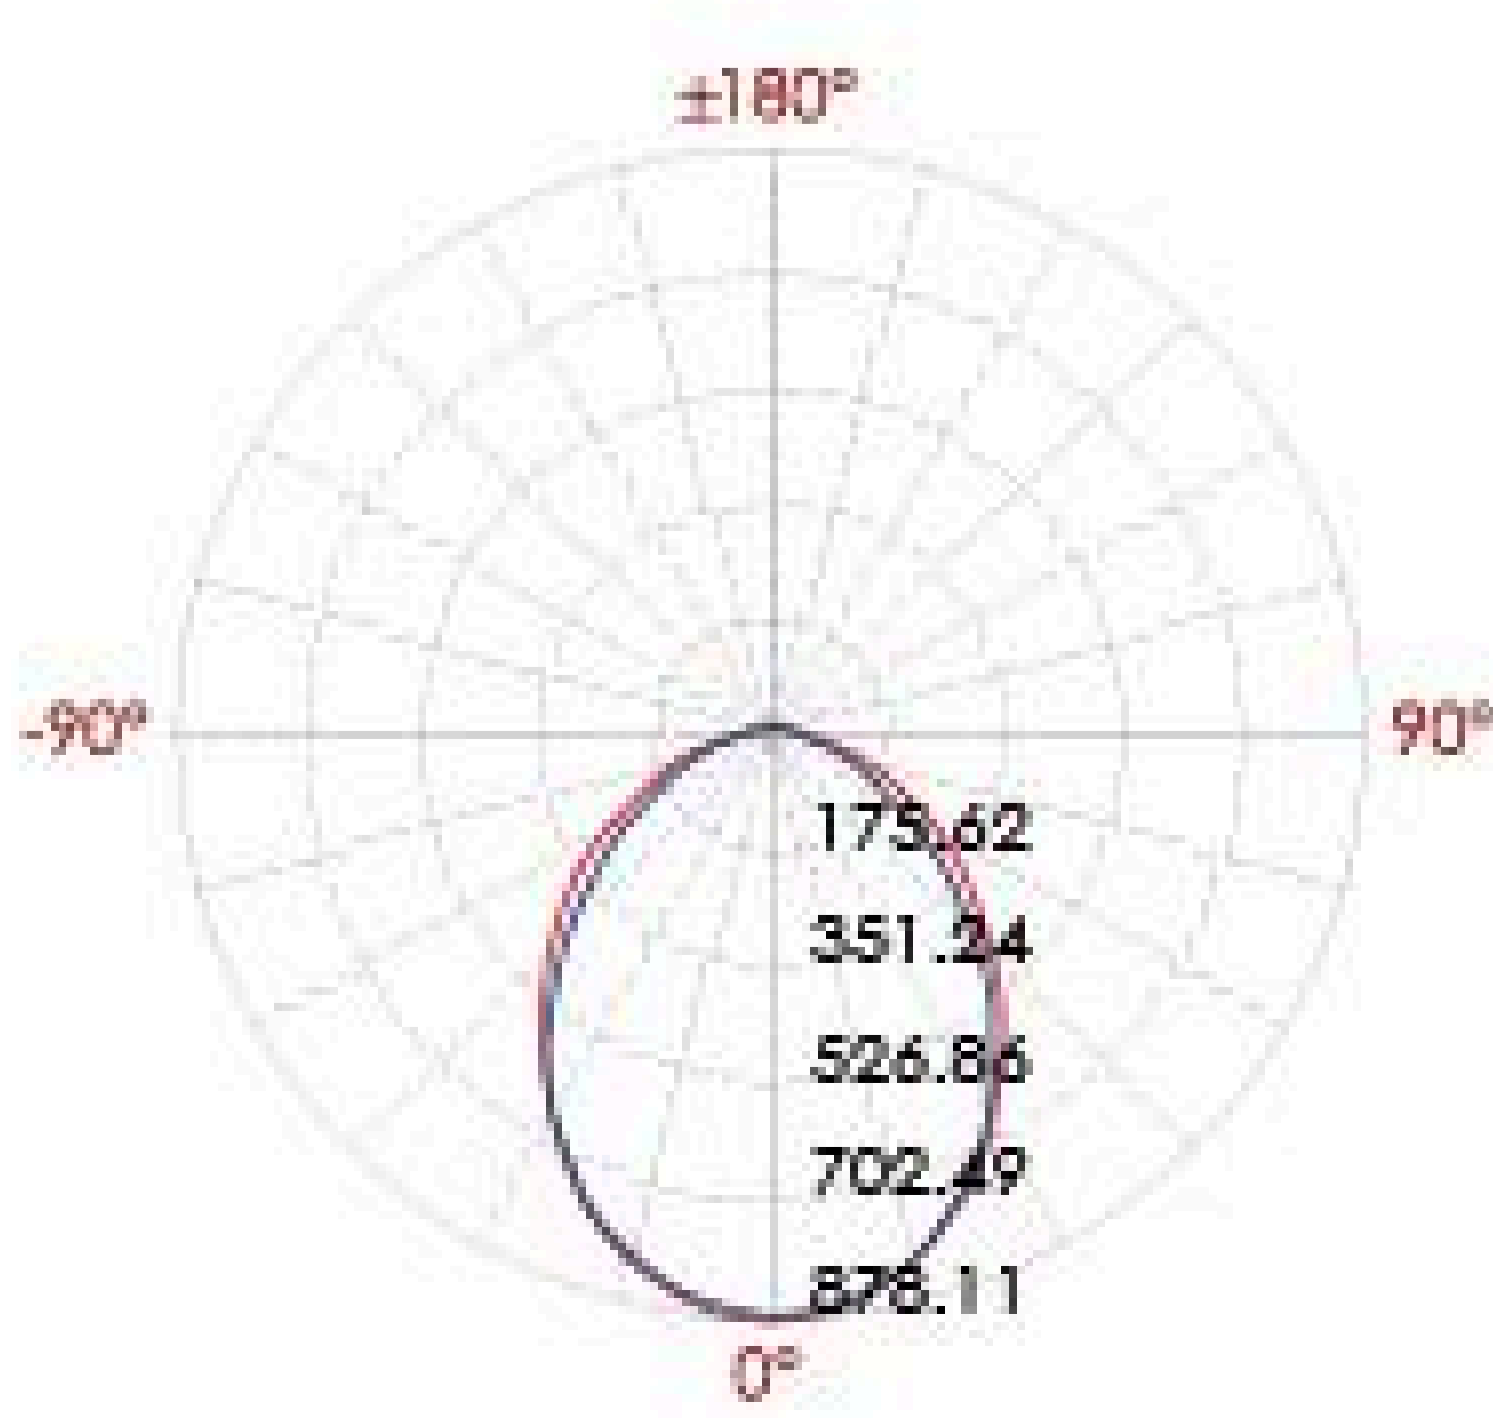

Center beam LUX	Beam width V	Beam width H
2m 219.53 LUX	4.2m	3.9m
4m 54.88 LUX	8.5m	7.7m
6m 24.39 LUX	12.7m	11.6m
8m 13.72 LUX	16.9m	15.5m
10m 8.78 LUX	21.2m	19.3m
12m 6.10 LUX	25.4m	23.2m

Ver.Spread:93.3 Horiz.Spread:88.0