


07FBE2ED4856 (TWO SIDE)

Light Source	48x1W
Selected Degree (°)θ1/2	92° x 88°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=2292 240V=238
Consumption (W)	24V/240V=55
Luminance (LM)	WW=2100x2
IK	03

Linear Drawing

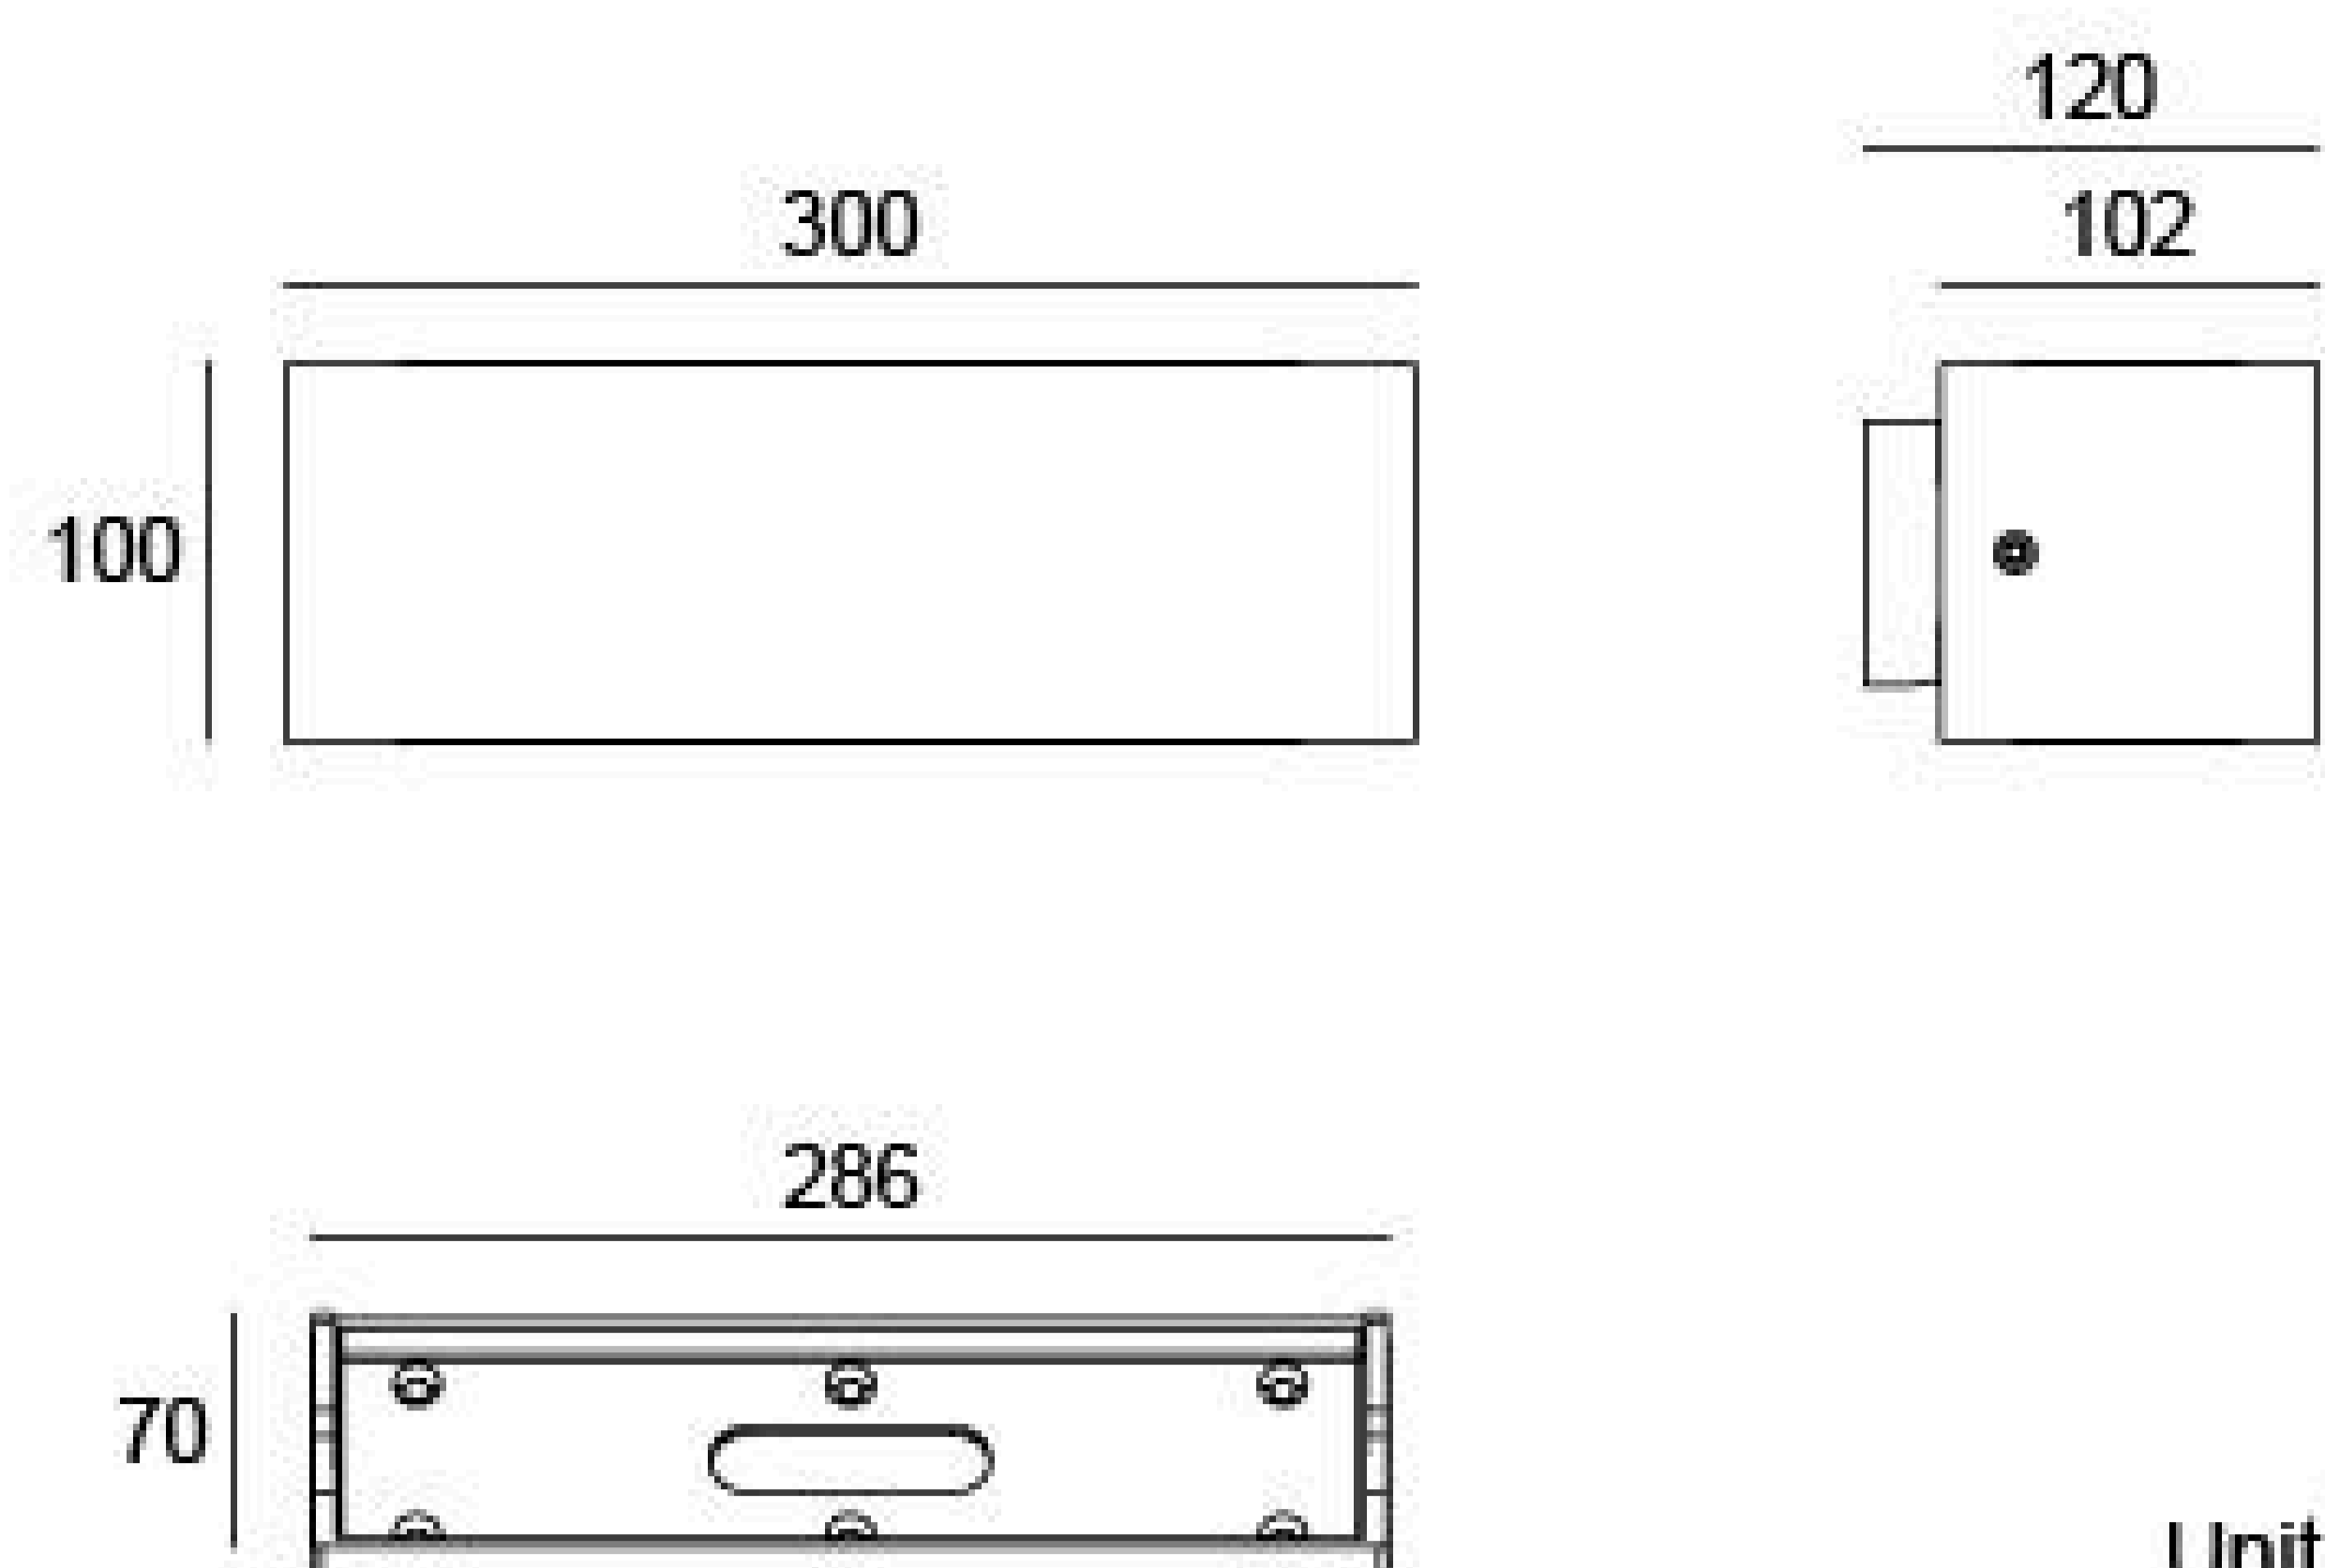

Unit: mm



Specification

Housing	12# Die-casting aluminum powder painting T=60-80μm.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.3m 240V: H05RN-F 3×1.0mm ² , L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color





Diagram of Instruction

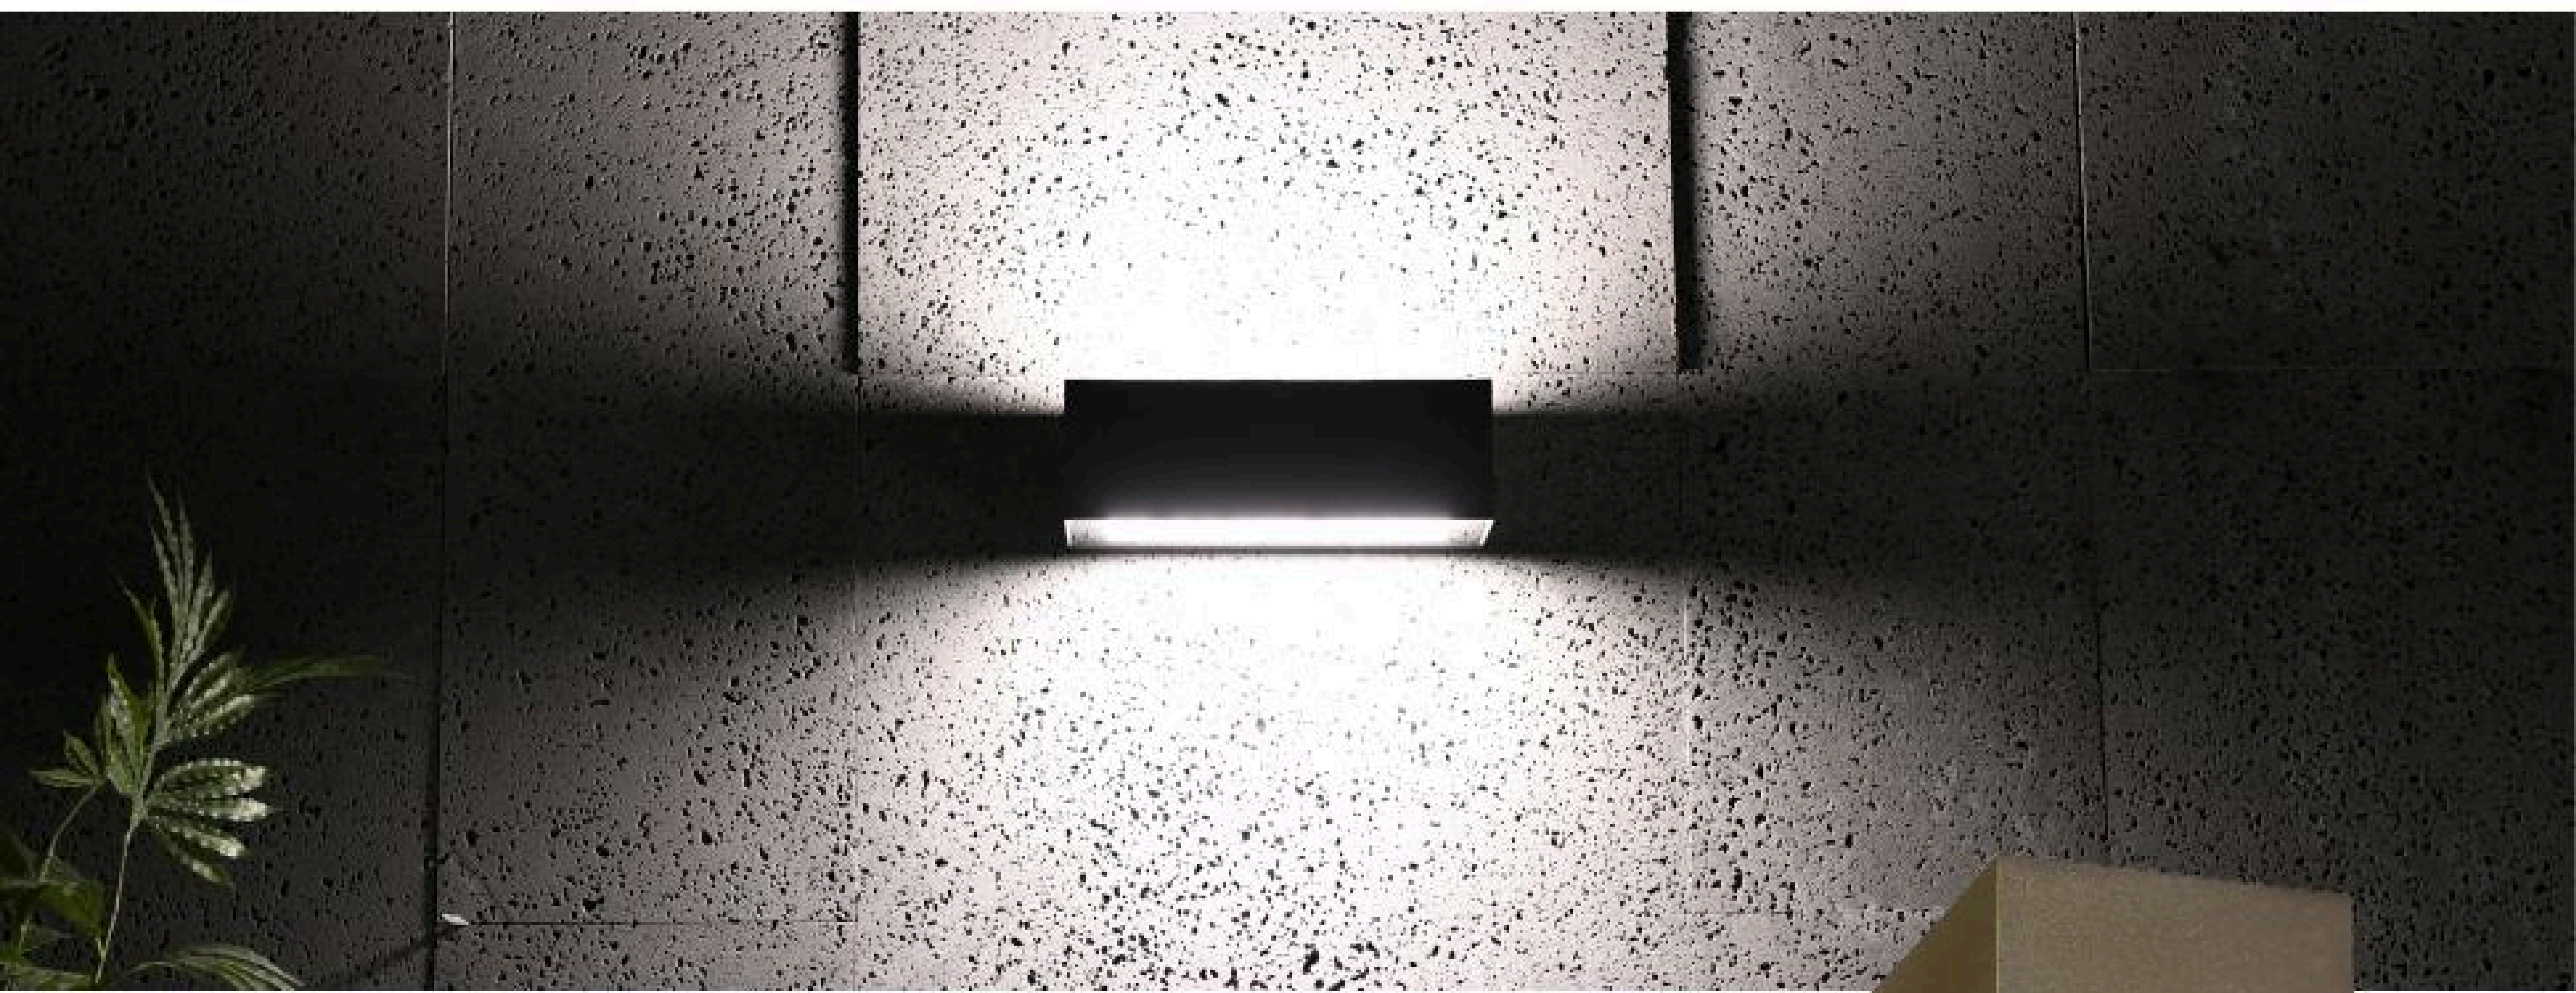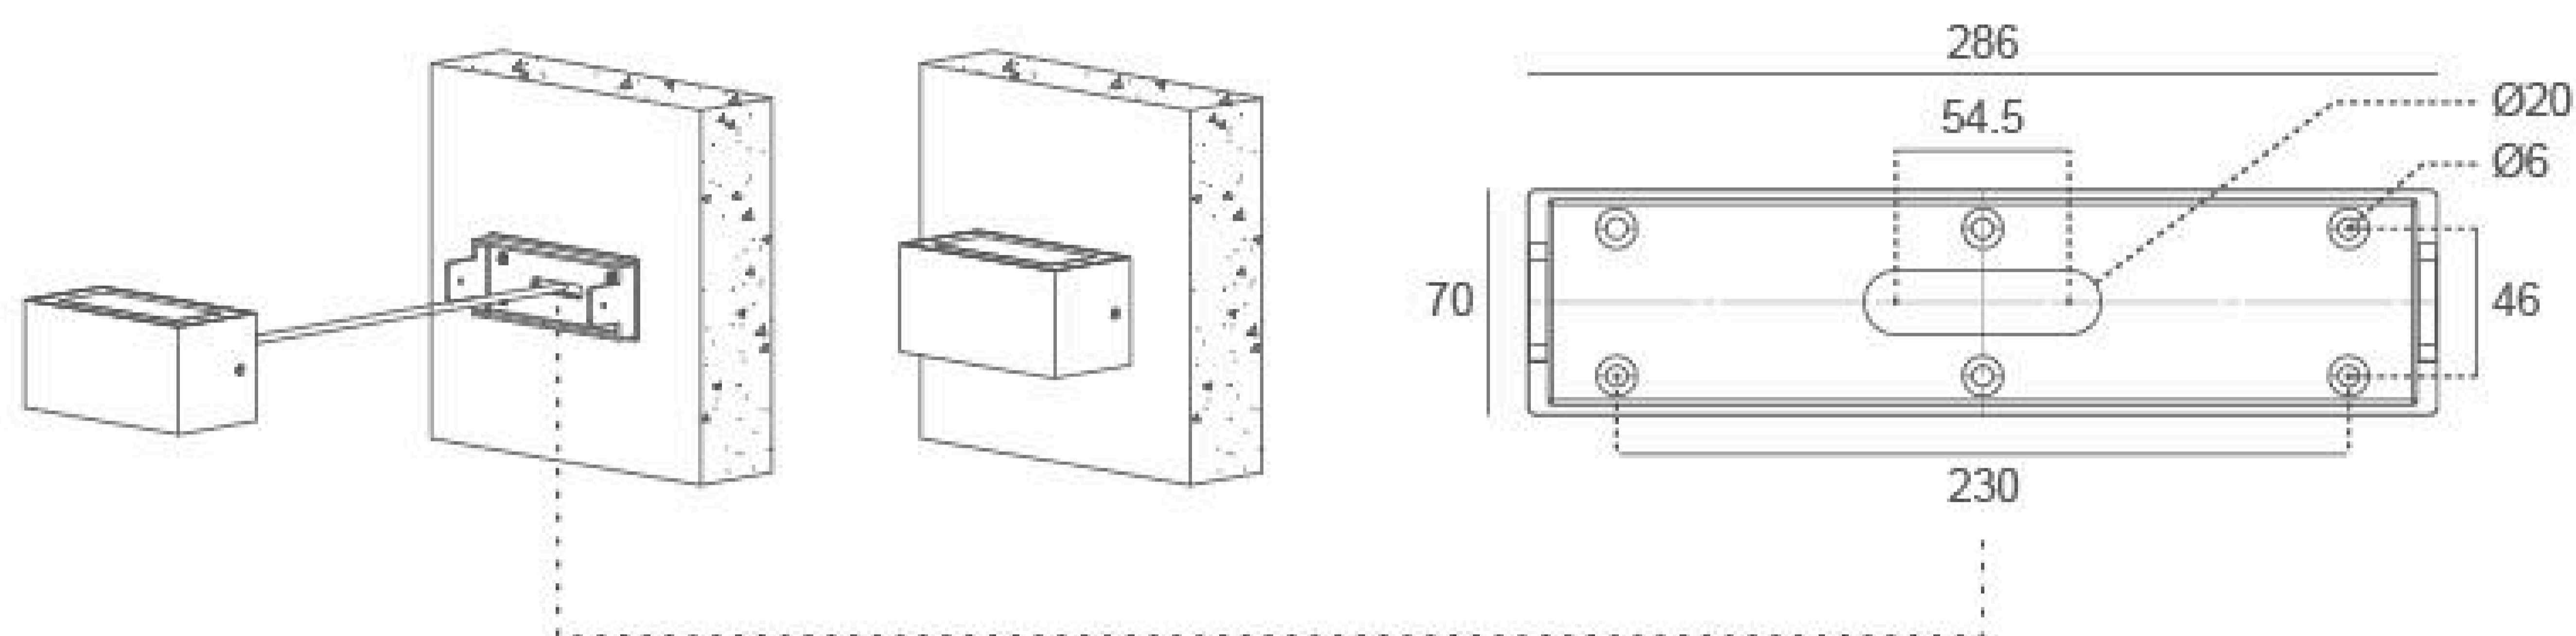

Photometric

12m	6.10 LUX
11m	
10m	8.78 LUX
9m	
8m	13.72 LUX
7m	
6m	24.39 LUX
5m	
4m	54.88 LUX
3m	
2m	219.53 LUX
1m	

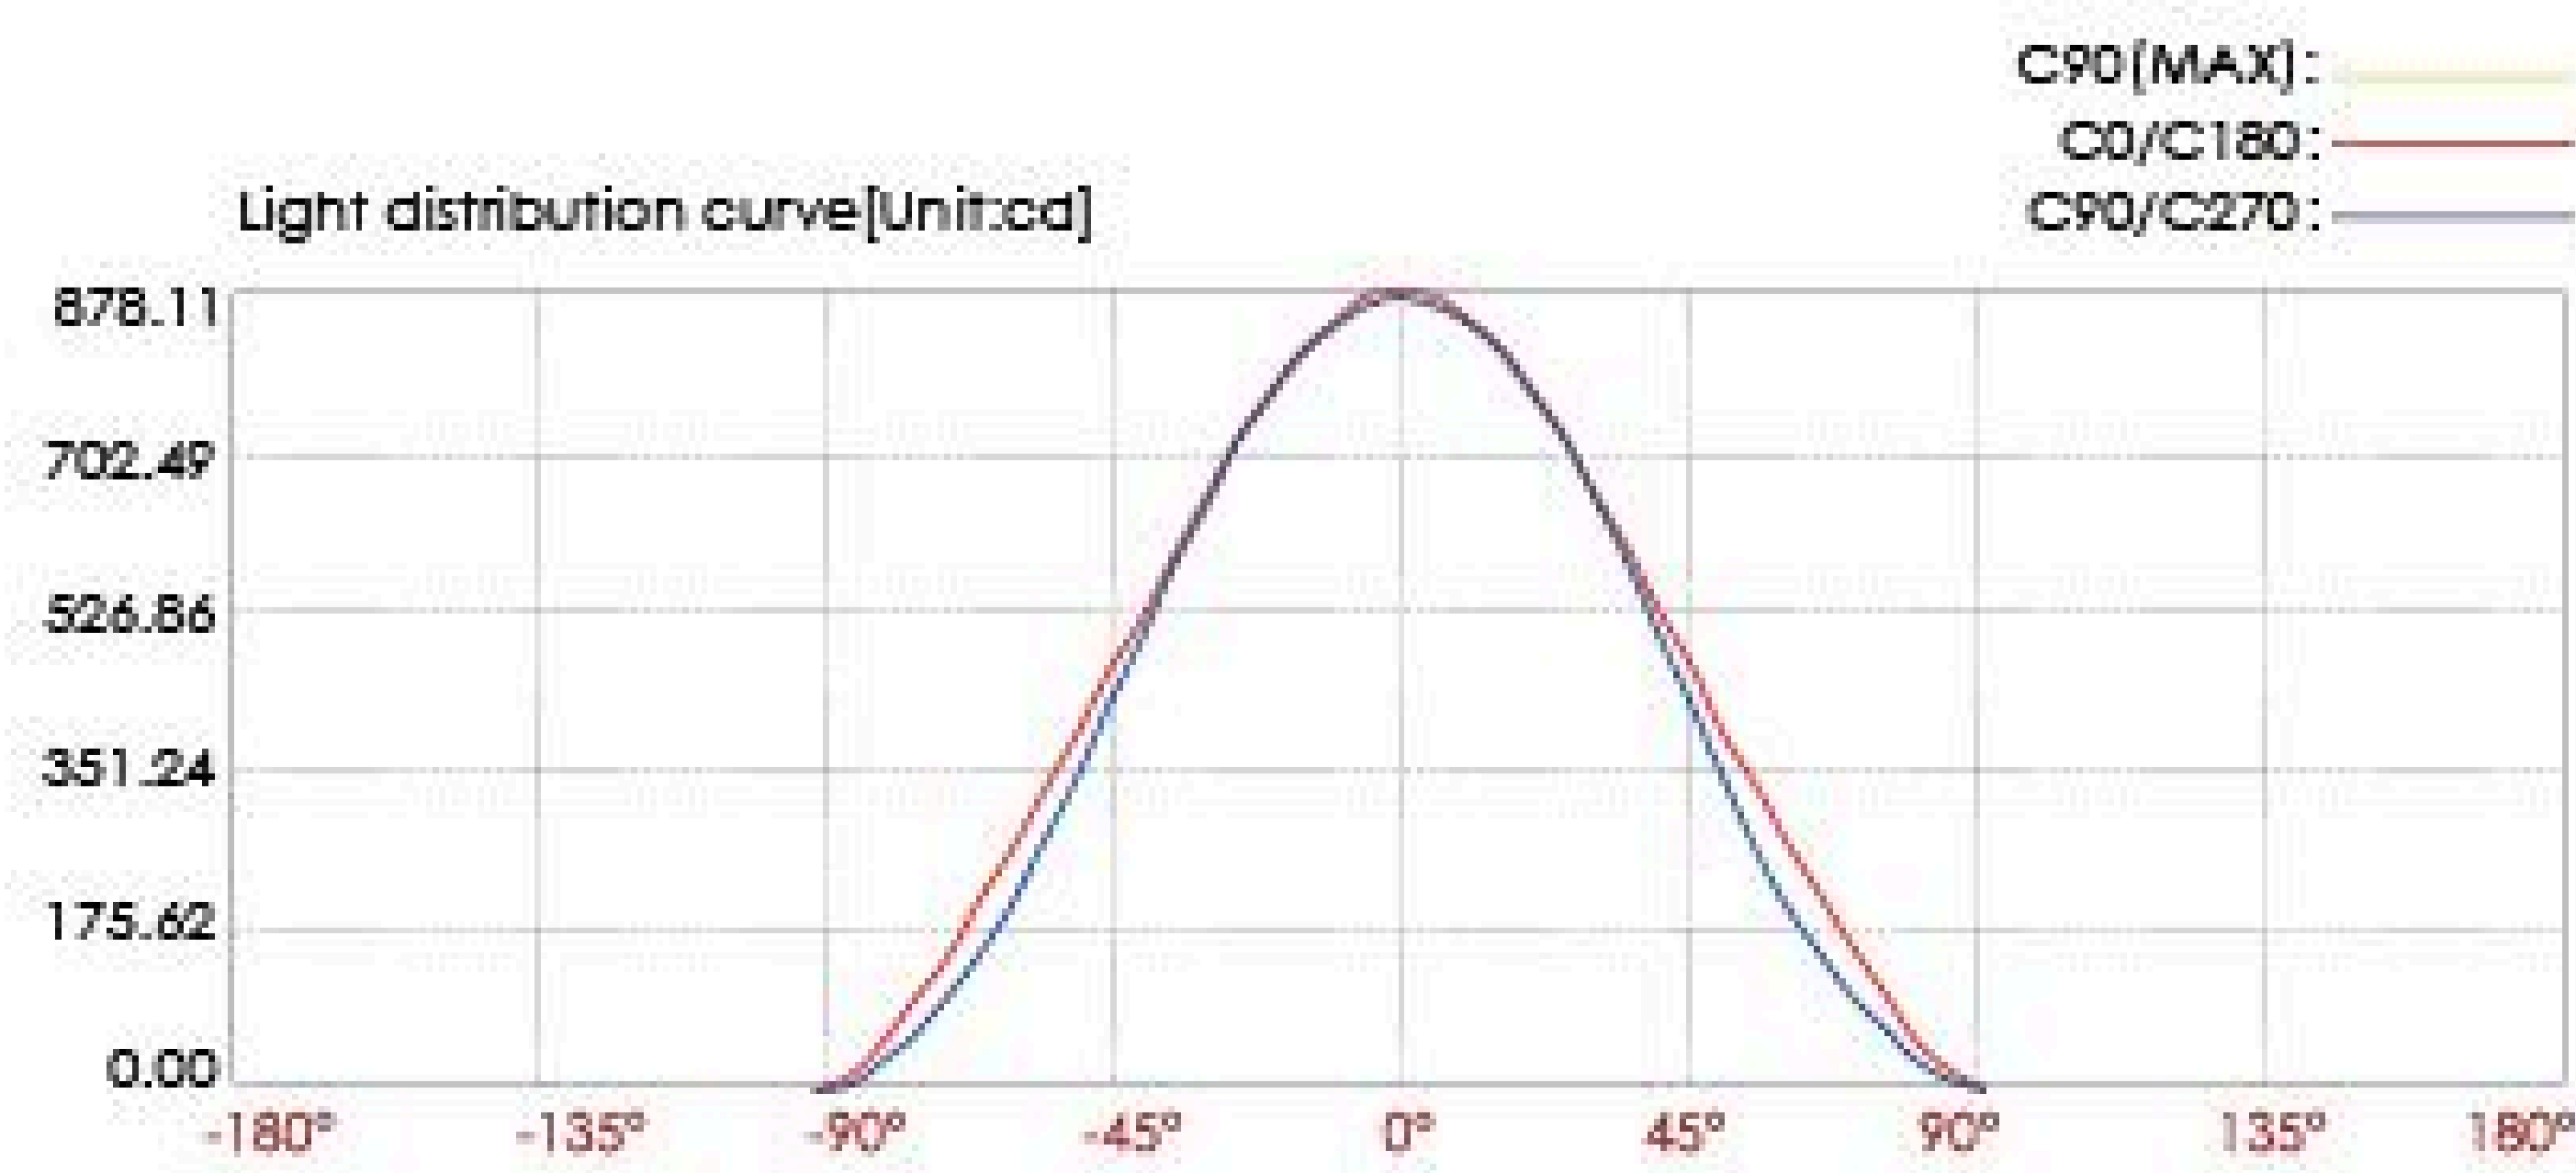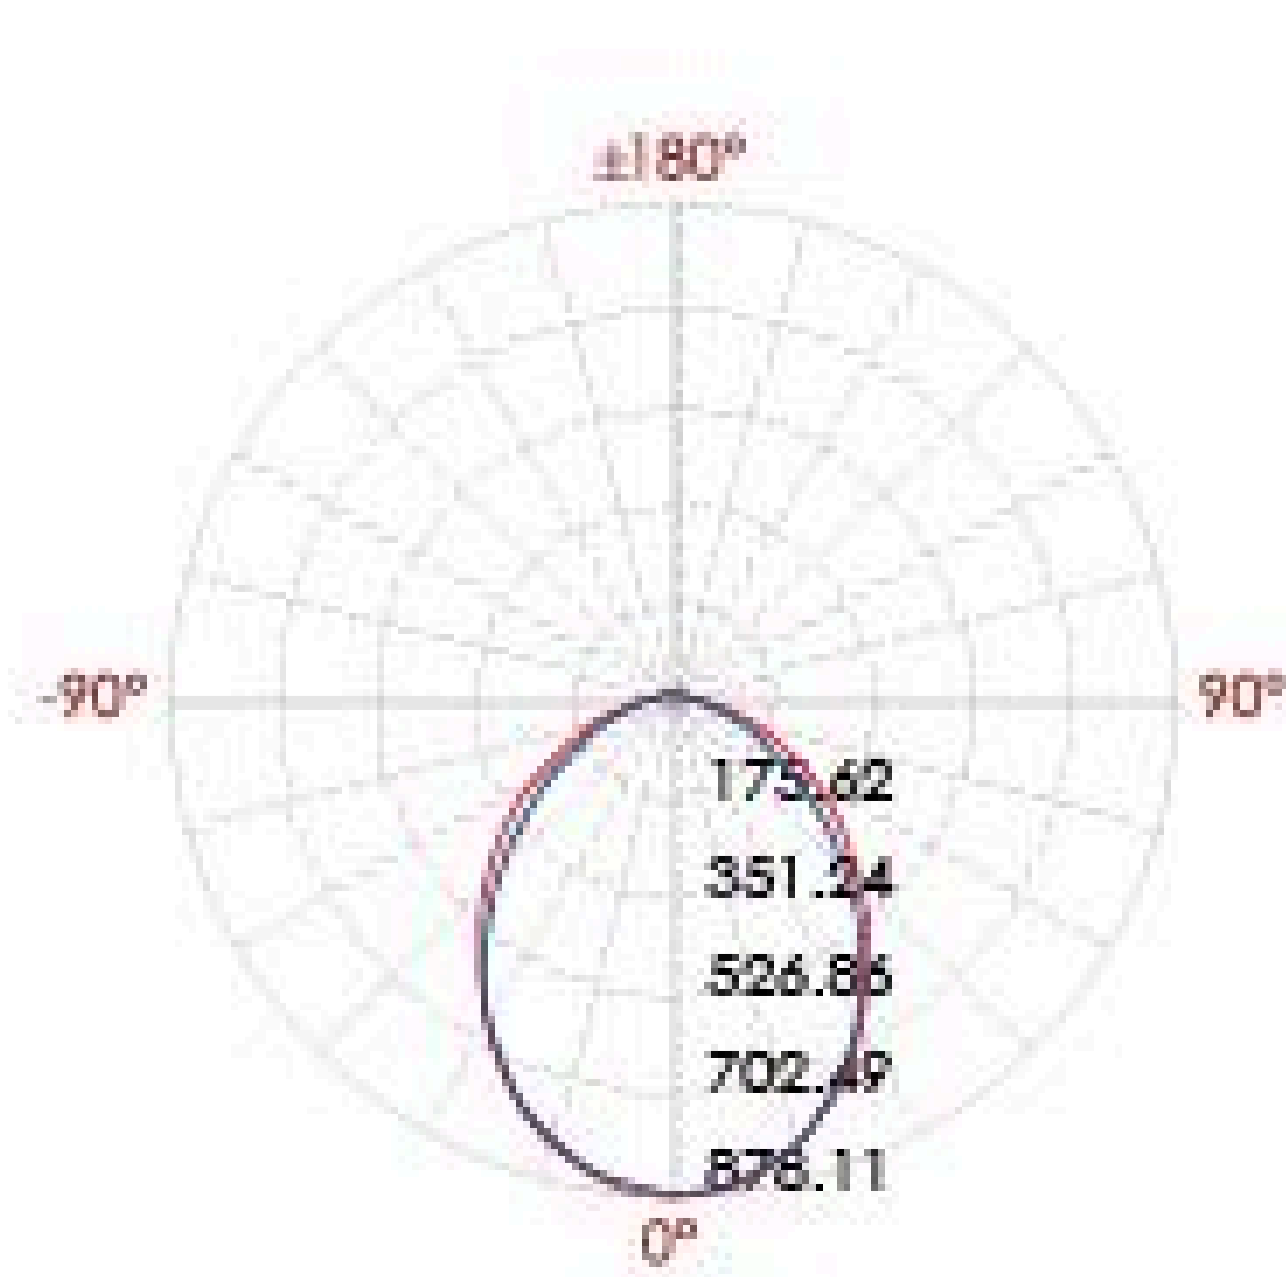

Center beam LUX	Beam width V	Beam width H
2m 219.53 LUX	4.2m	3.9m
4m 54.88 LUX	8.5m	7.7m
6m 24.39 LUX	12.7m	11.6m
8m 13.72 LUX	16.9m	15.5m
10m 8.78 LUX	21.2m	19.3m
12m 6.10 LUX	25.4m	23.2m

Ver.Spread:93.3 Horiz.Spread:88.0