


07GBE2ED1656 (TWO SIDE)

Light Source	16x1W
Selected Degree (°)θ1/2	89° x 65°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=833 240V=87
Consumption (W)	24V/240V=20
Luminance (LM)	WW=474x2
IK	03

Linear Drawing

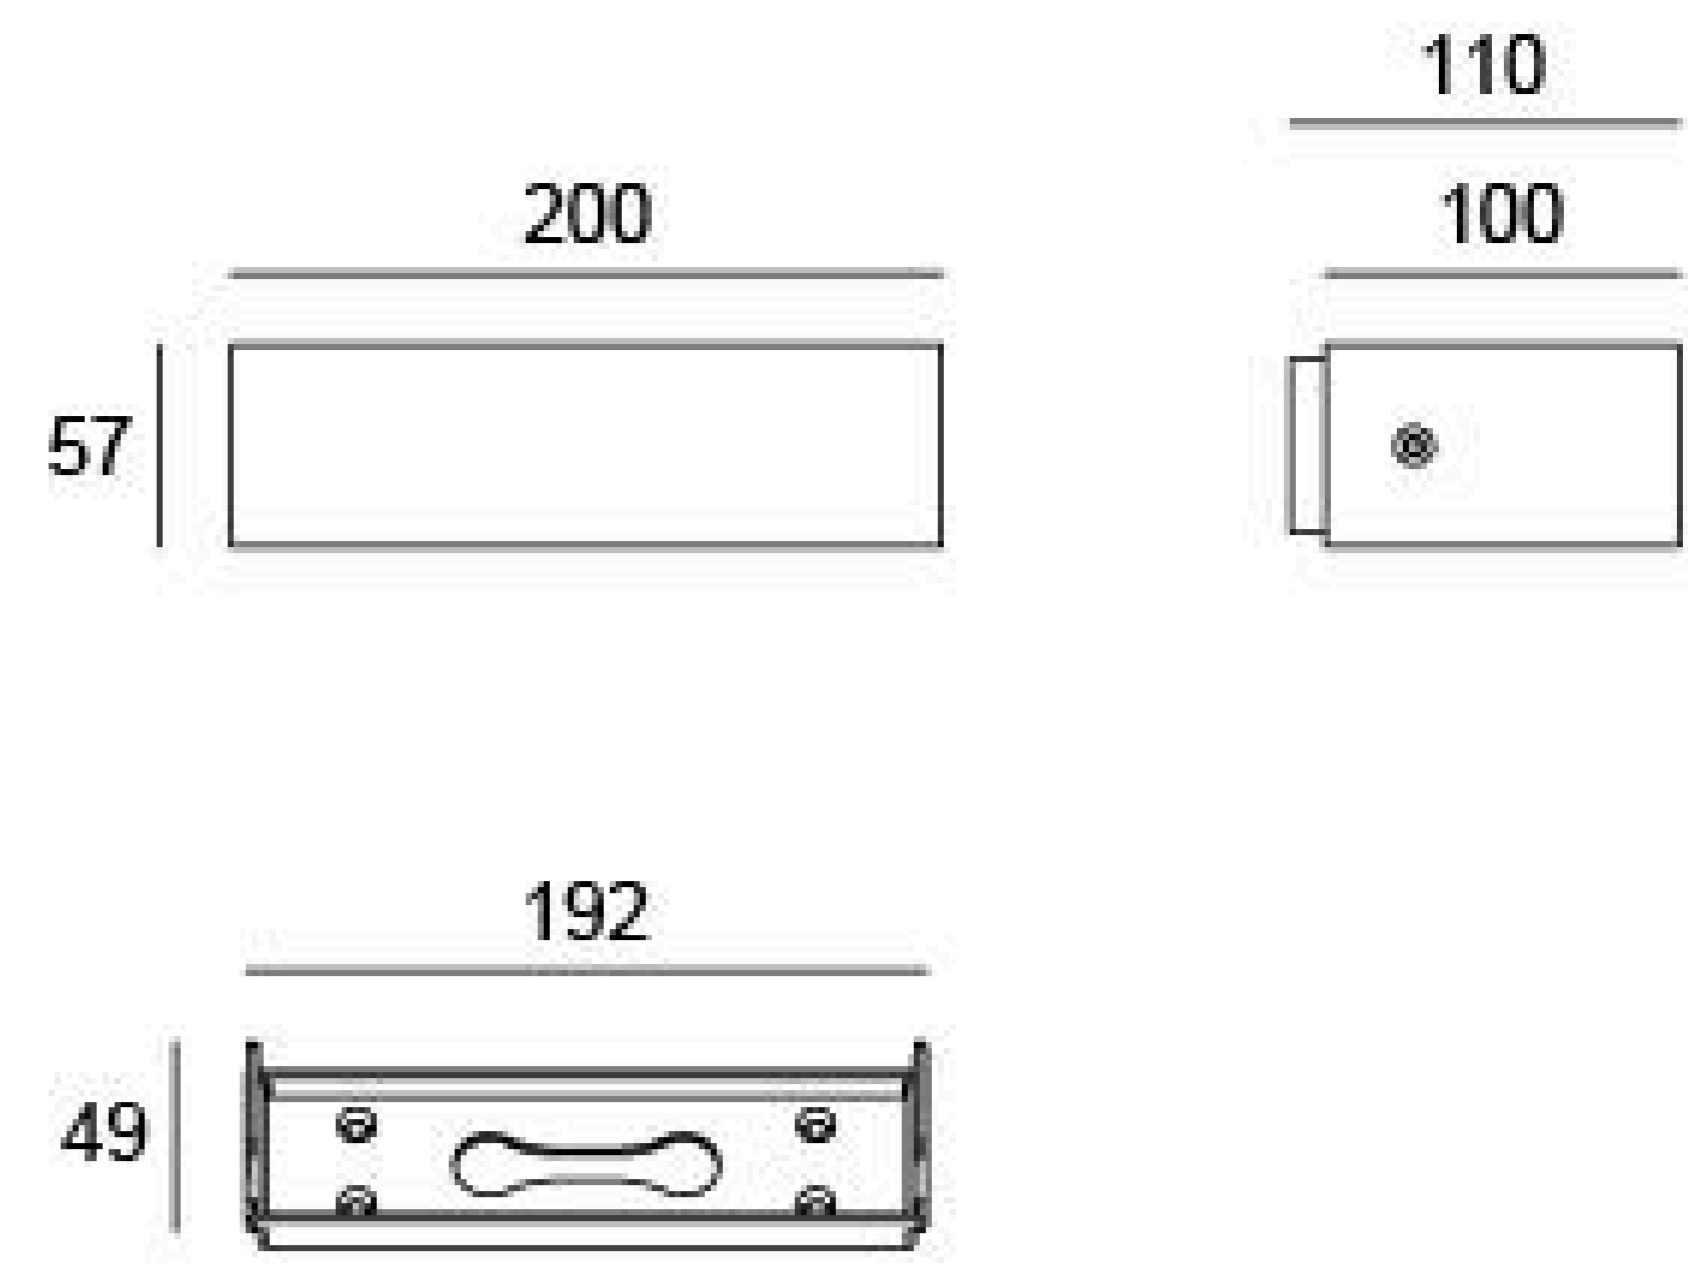

Unit: mm



Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2x1.0mm², L=0.3m 240V: H05RN-F 3x1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color



- Primary**
 - Sanded Dark Grey KAP 7037
- Secondary**
 - Sanded Black RAL 9005
 - Smoke Grey KAP 7043
 - Sanded Bronze KAP 7008
 - Sanded White RAL 9003

Diagram of Instruction

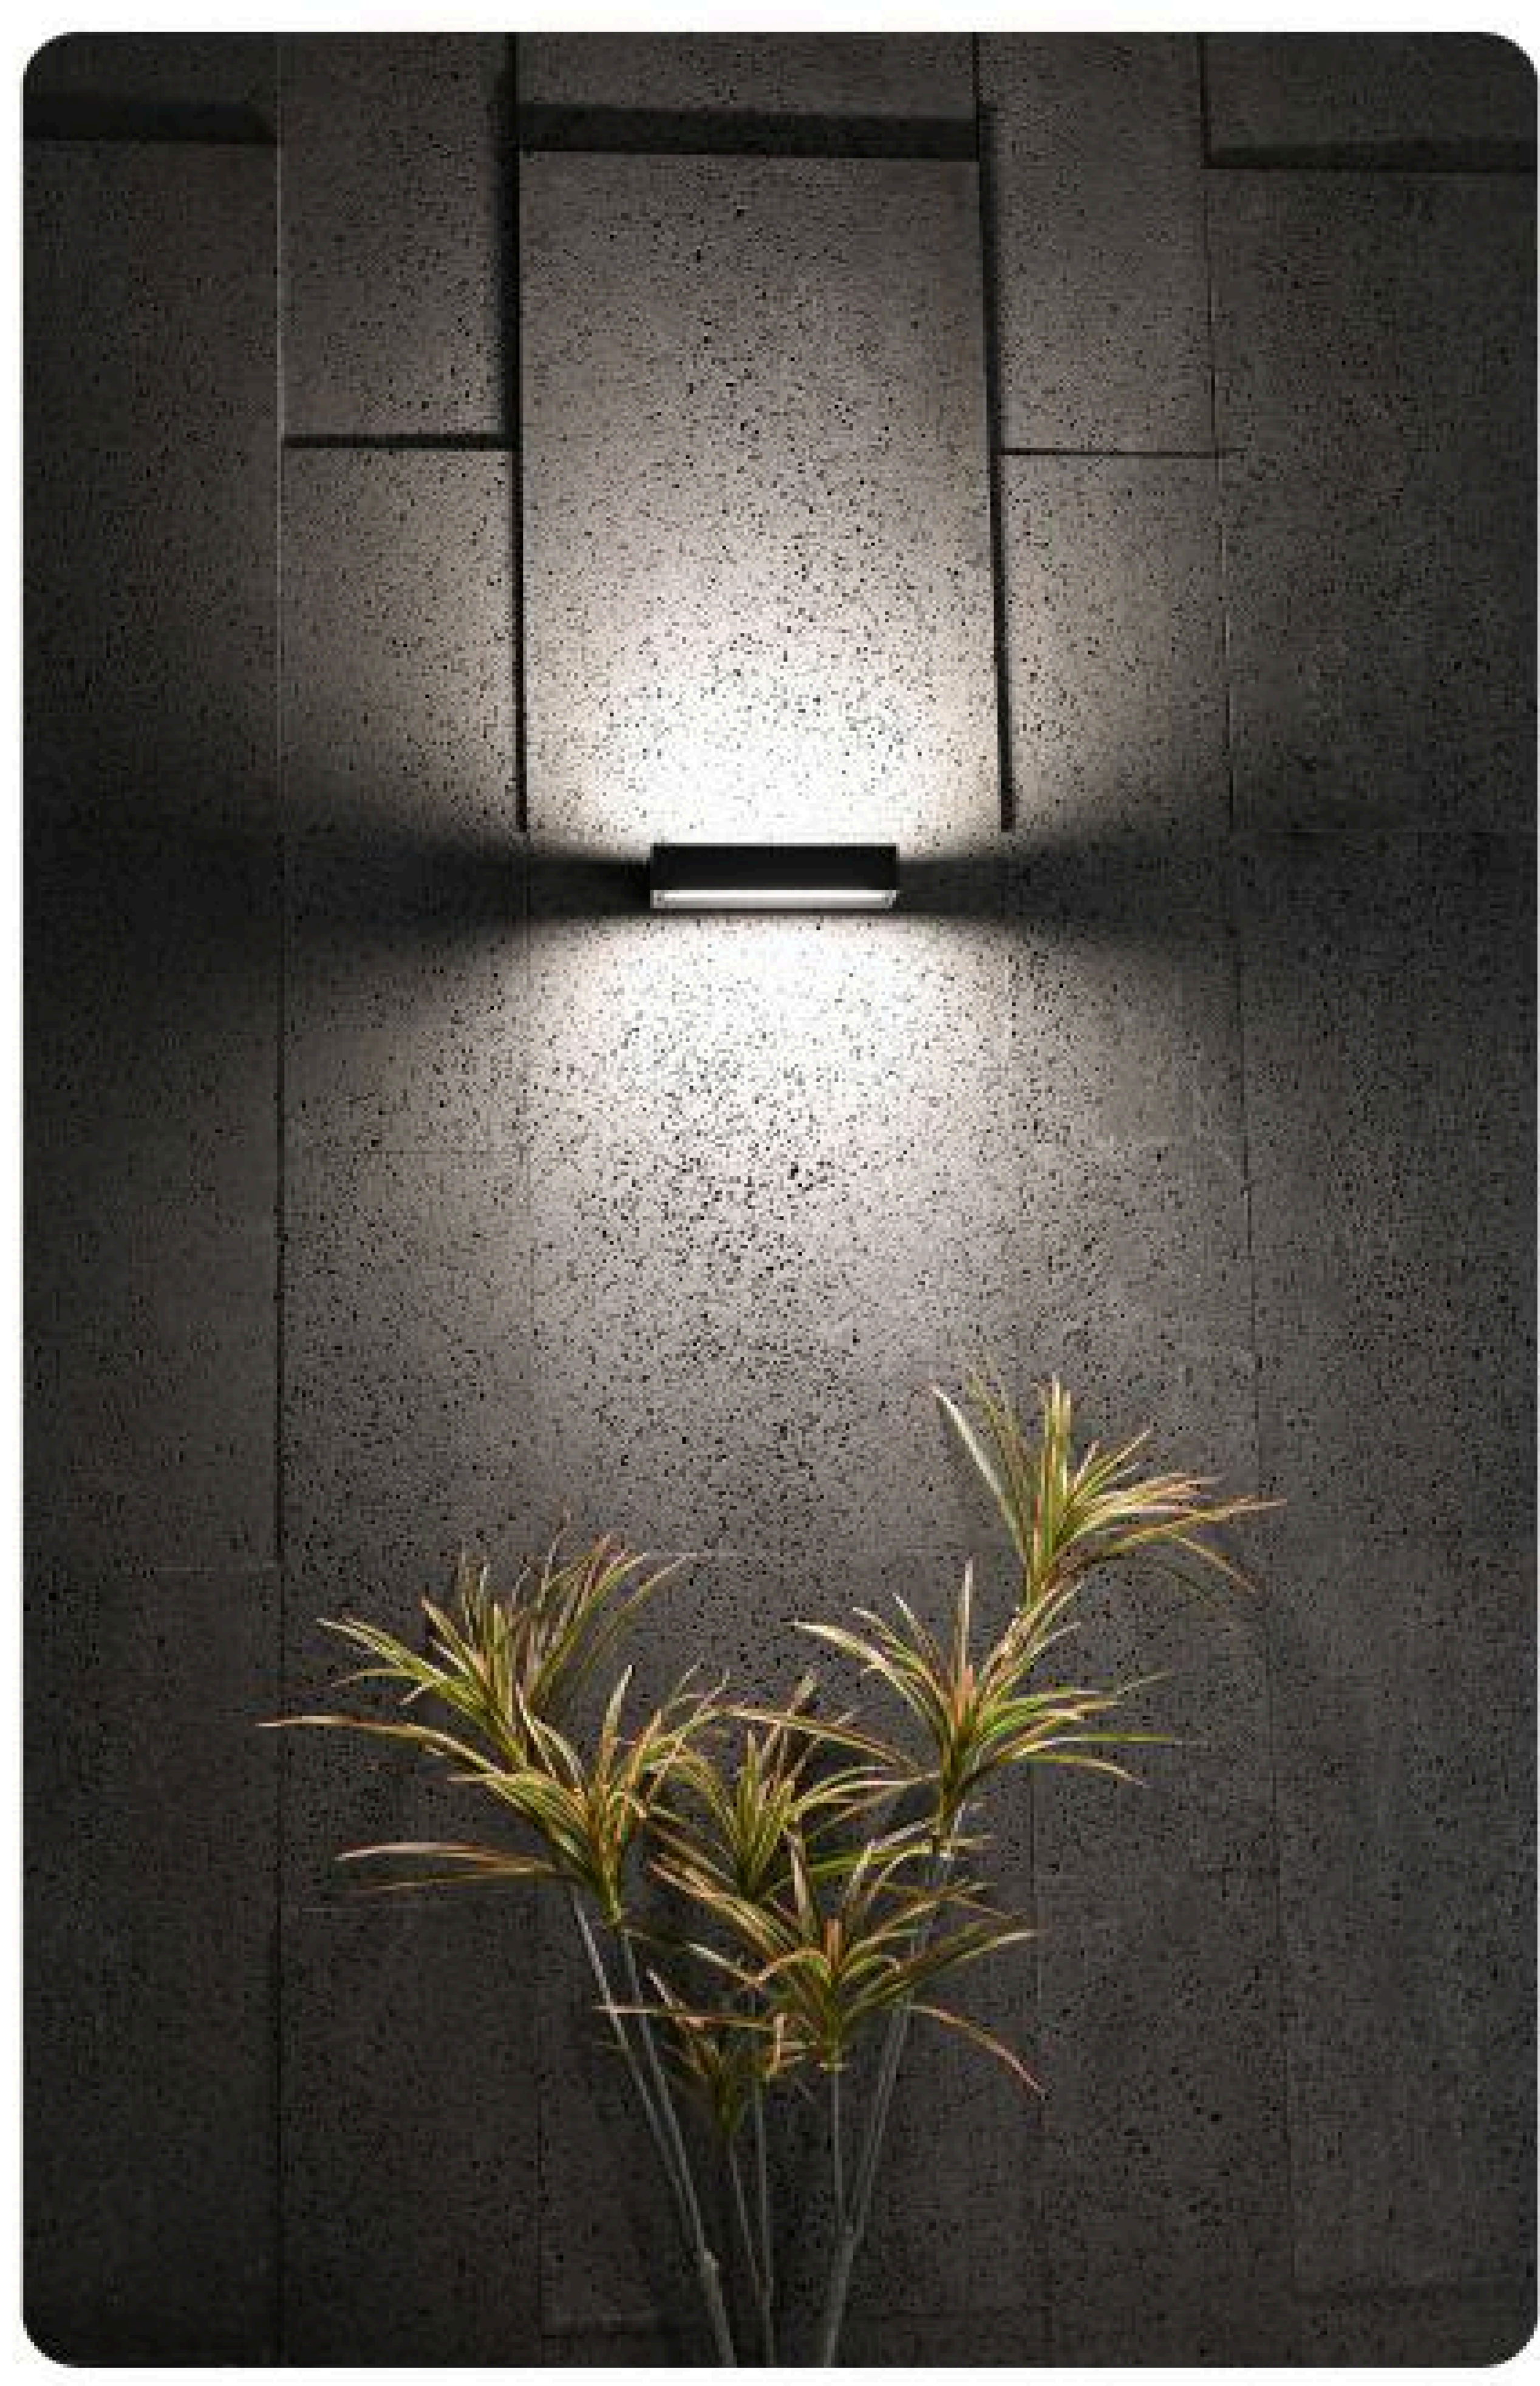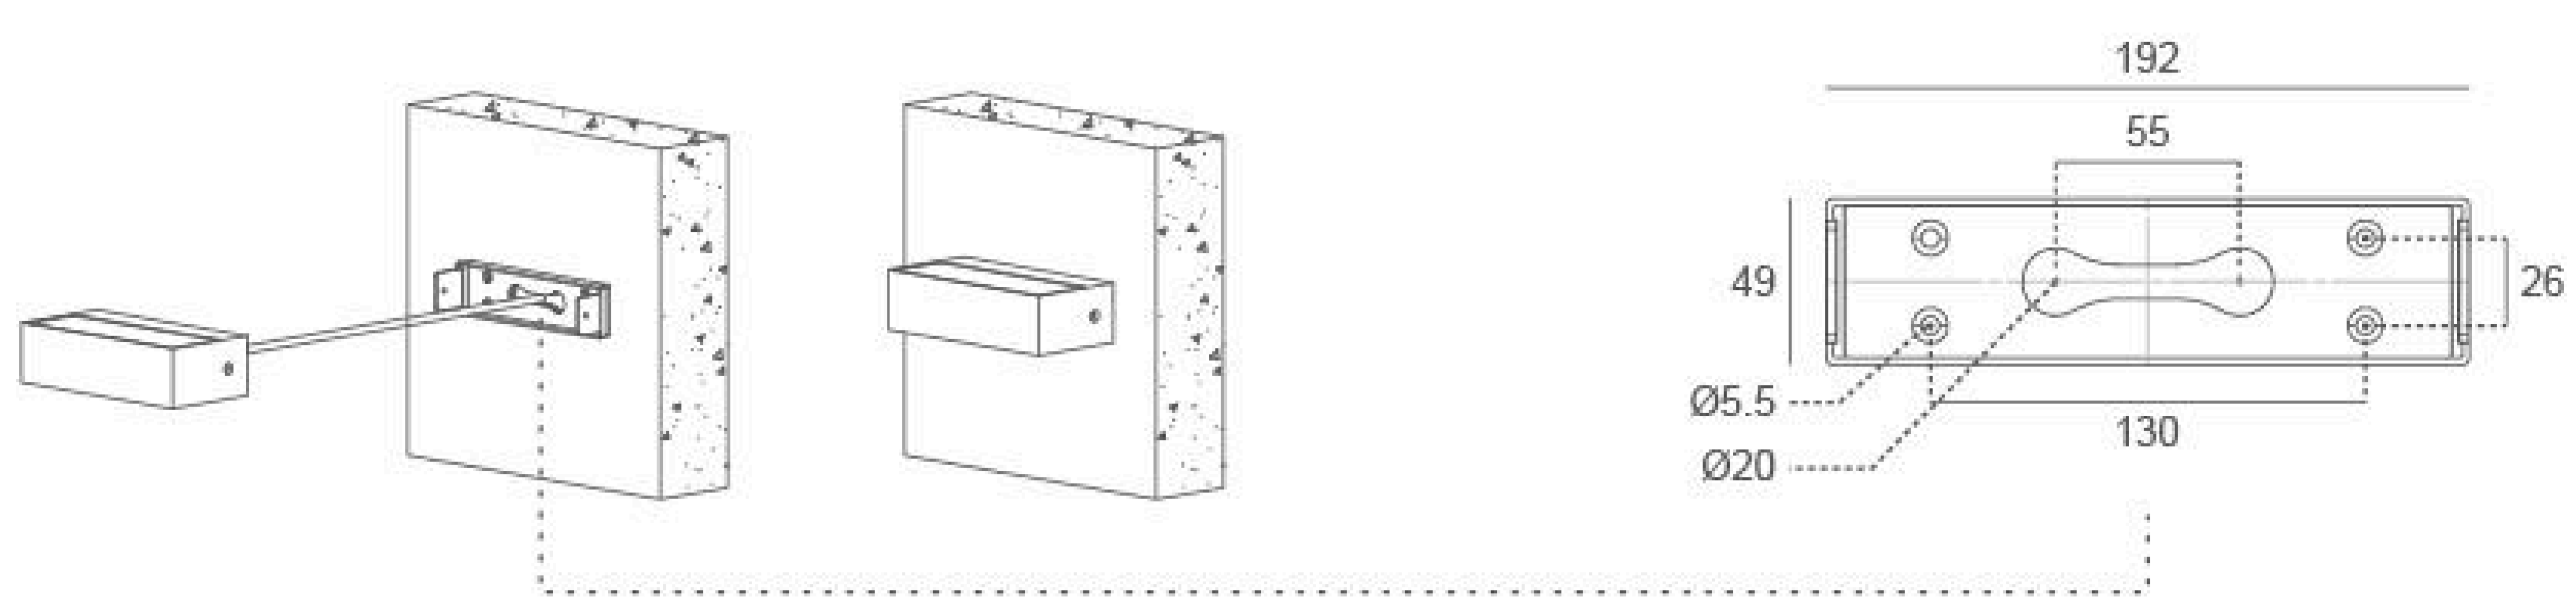

Photometric

12m	1.80 LUX
11m	
10m	2.59 LUX
9m	
8m	4.05 LUX
7m	
6m	7.20 LUX
5m	
4m	16.21 LUX
3m	
2m	64.82 LUX
1m	

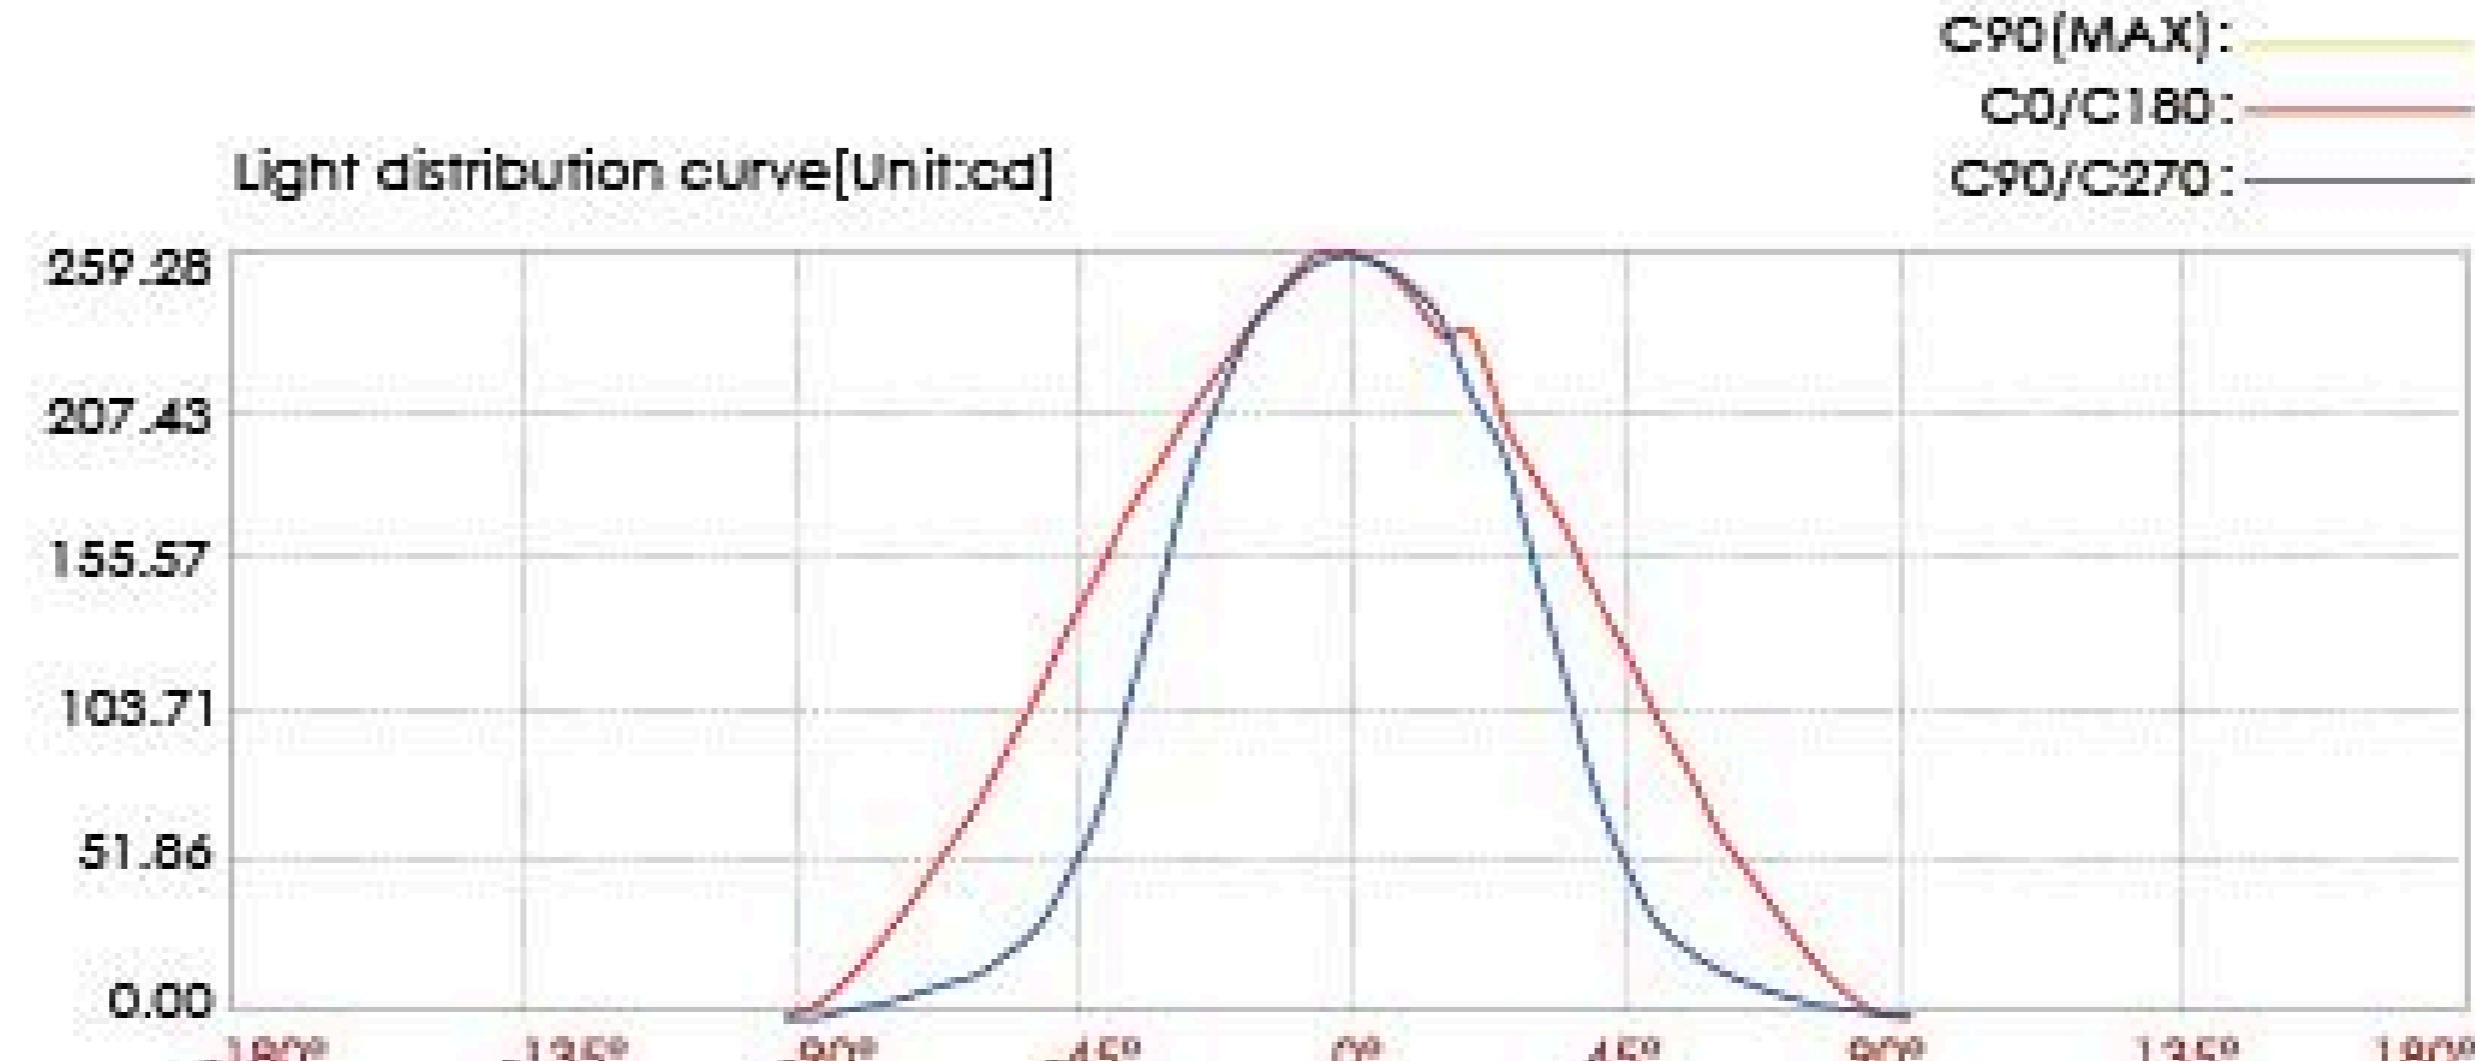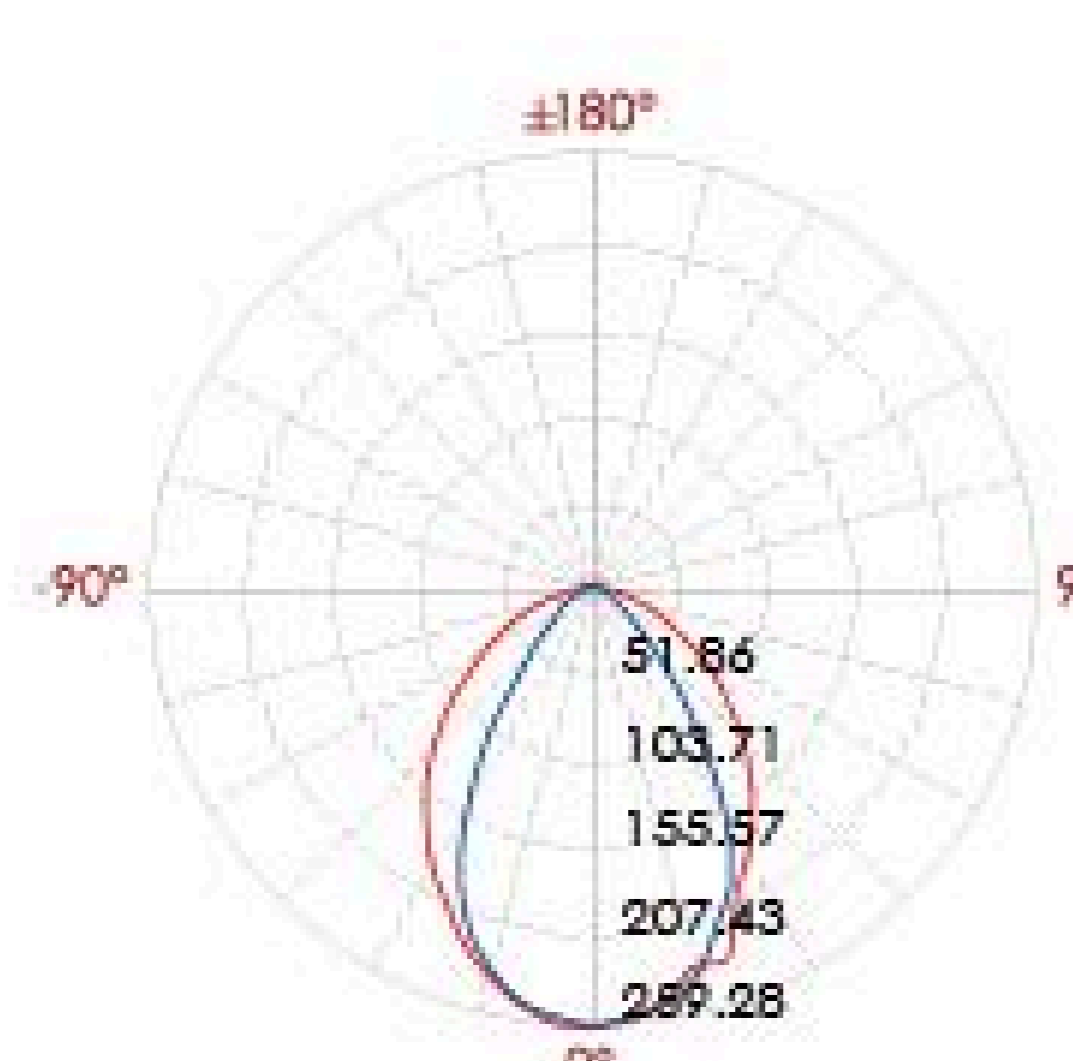

Lux distance curve

Distance (m)	Center beam LUX	Beam width V (m)	Beam width H (m)
2	64.82 LUX	3.9m	2.6m
4	16.21 LUX	7.8m	5.2m
6	7.20 LUX	11.7m	7.7m
8	4.05 LUX	15.7m	10.3m
10	2.59 LUX	19.6m	12.9m
12	1.80 LUX	23.5m	15.5m

Ver.Spread:88.8 Horiz.Spread:65.7