


07GPB0656 (TWO SIDE)

Light Source	6x1W
Selected Degree (°)θ1/2	40°
Input Voltage (V)	AC 240
Operating Current (MA)	240V=37
Consumption (W)	240V=8
Luminance (LM)	WW=325x2
IK	06

Linear Drawing

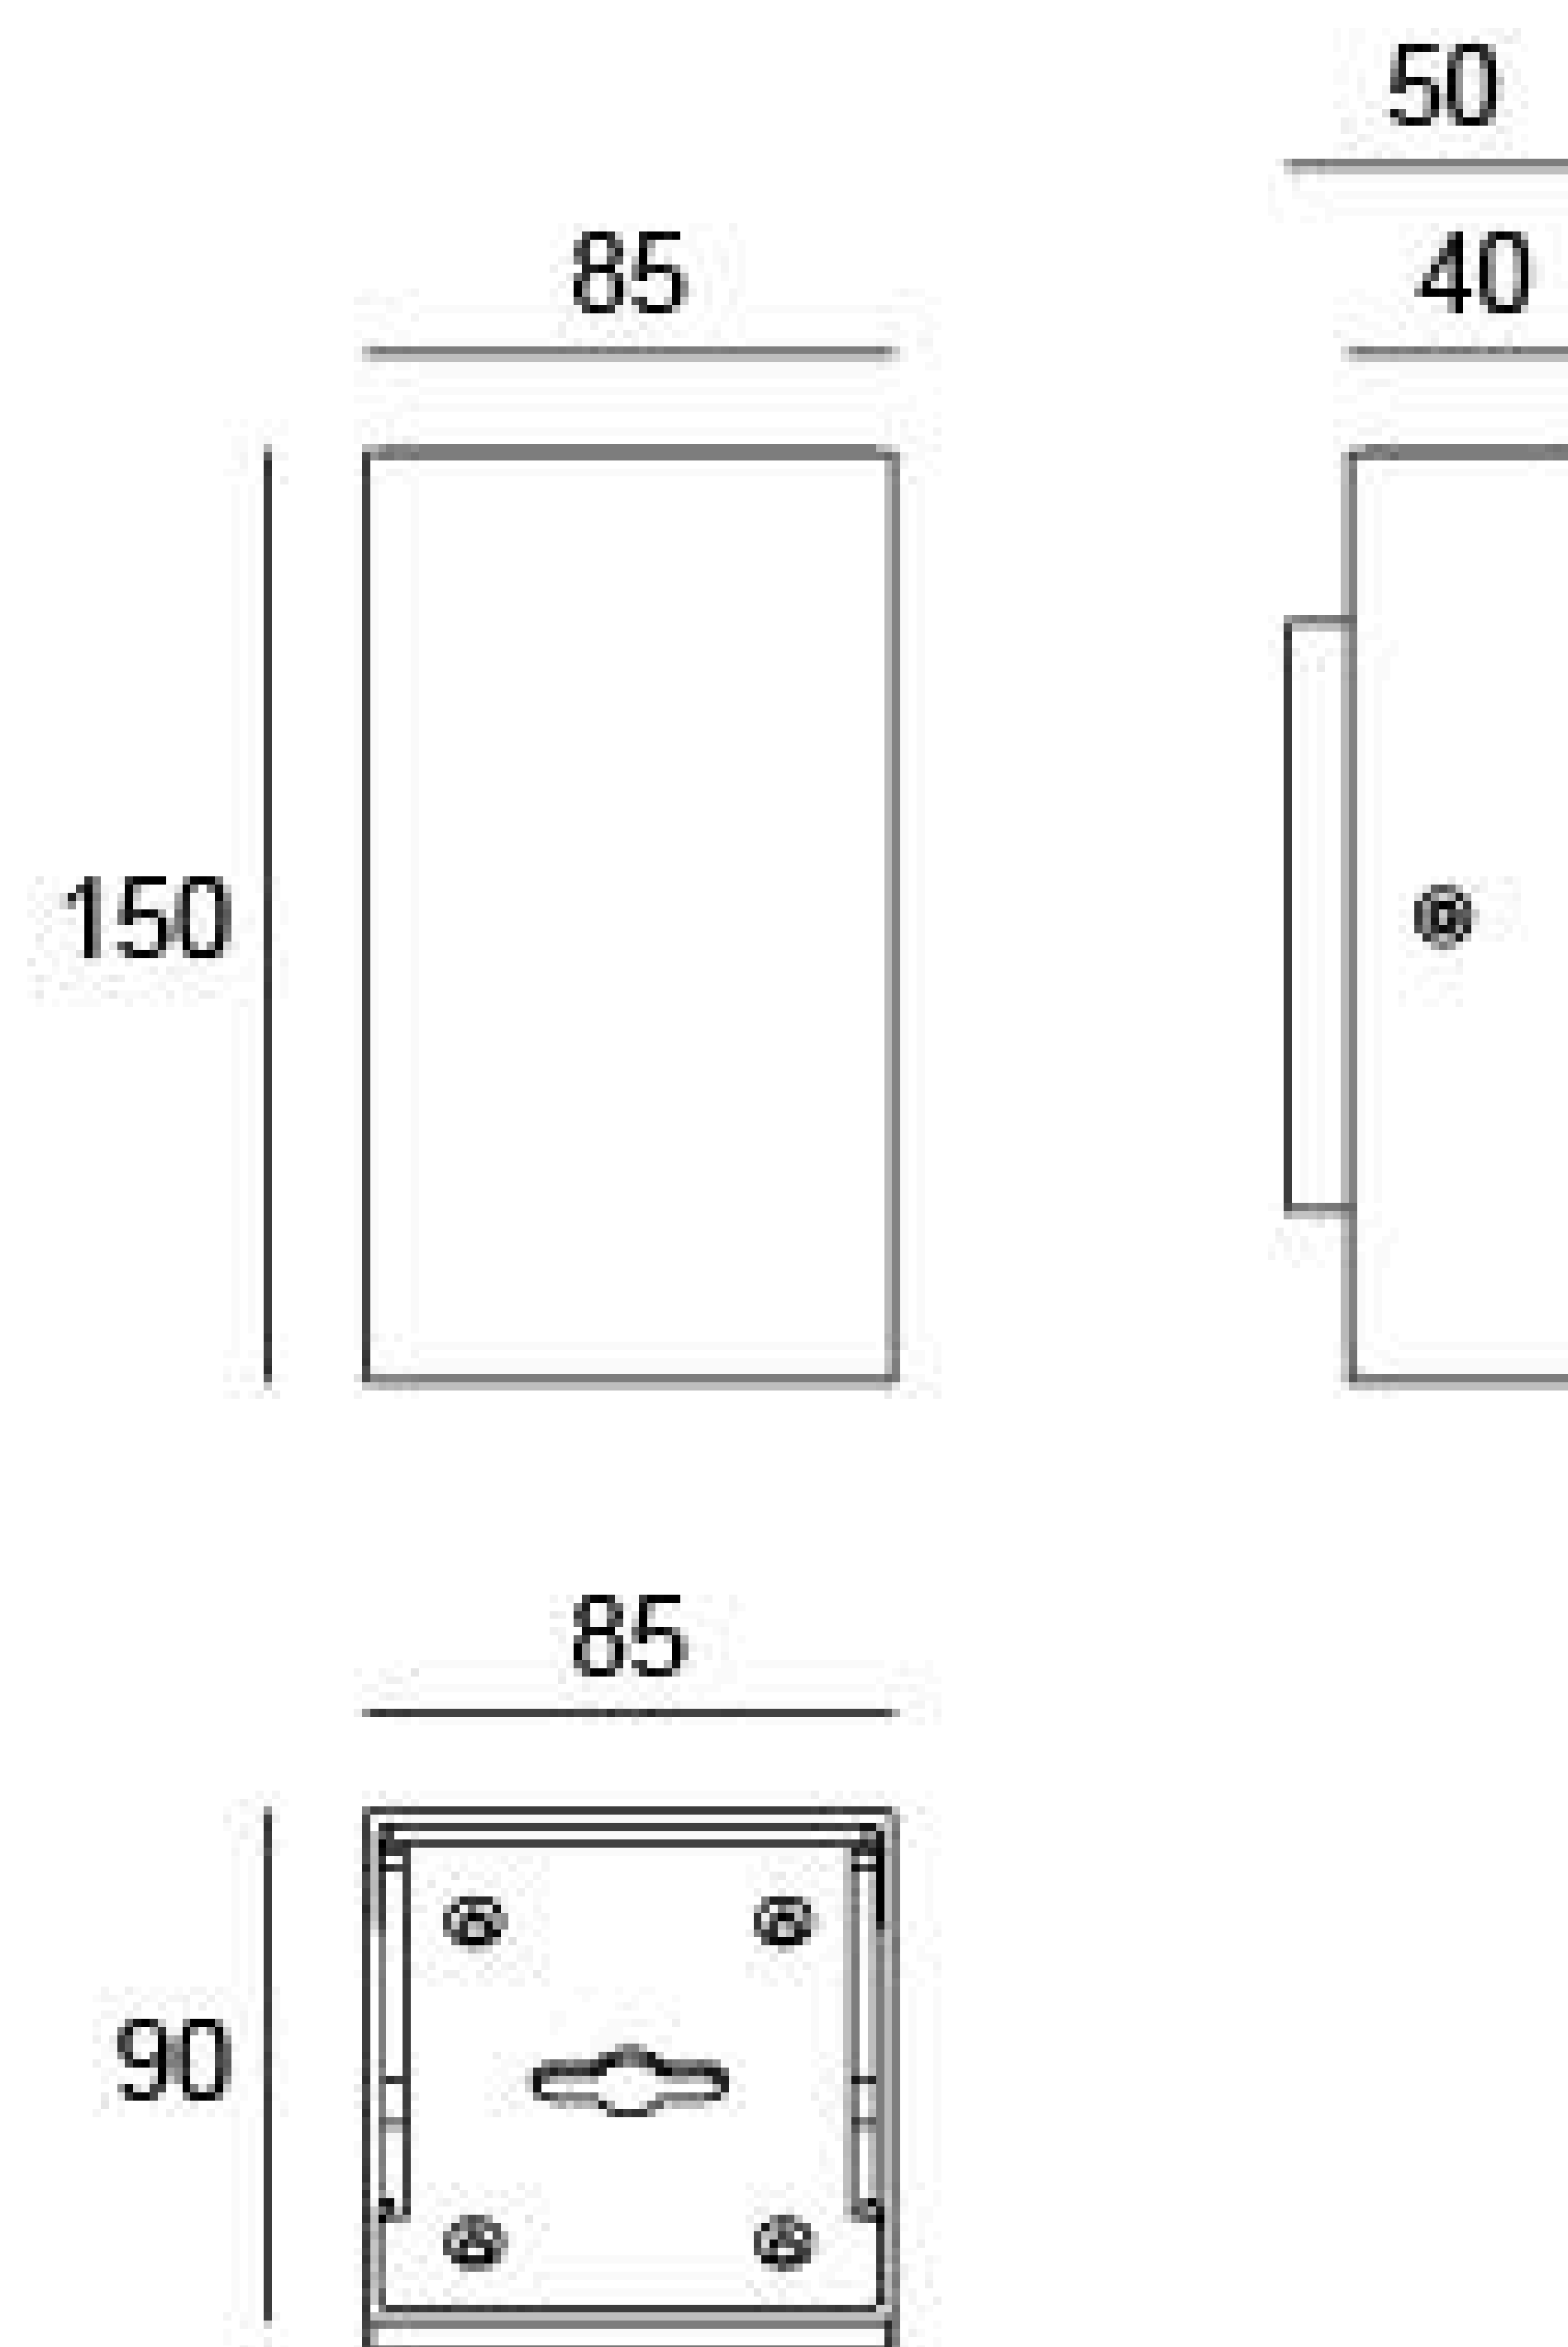


Unit: mm

Specification

Housing	12# Die-casting aluminum powder Painting. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	UVstop & Fireproof PC T=3mm
Gasket	Waterproof silicone gasket
LED Type	SMD
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 240V: H05RN-F 3×1.0mm ² , L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2

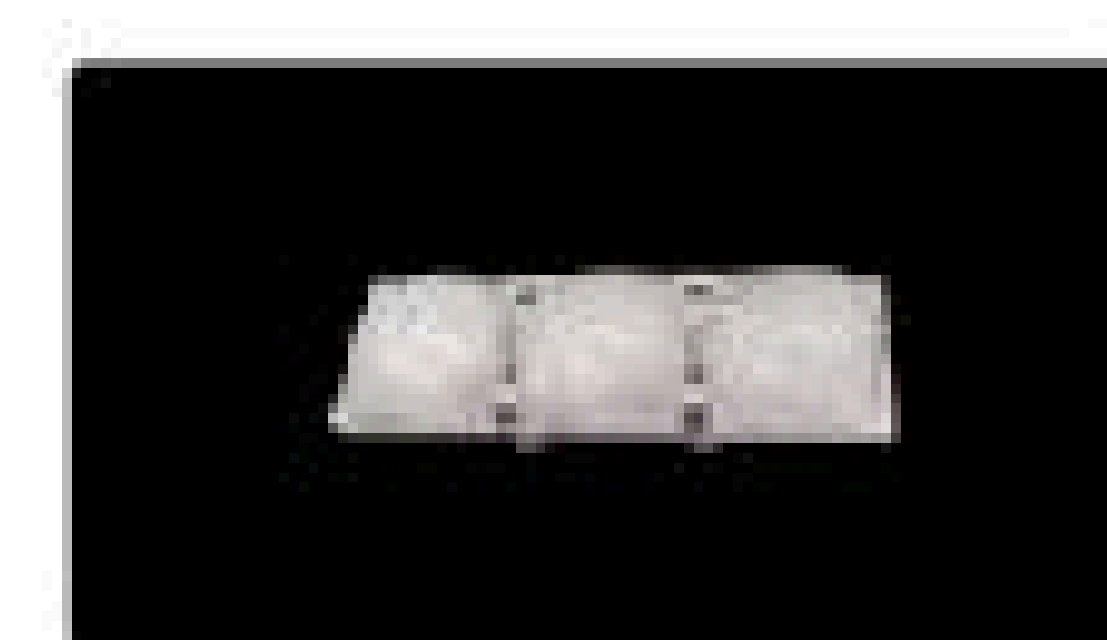


B116

40°


Painting Color

Primary




Sanded Dark Grey
KAP 7037

Secondary



Sanded Black
RAL 9005




Sanded White
RAL 9003





Sanded Bronze
KAP 7008

Diagram of Instruction

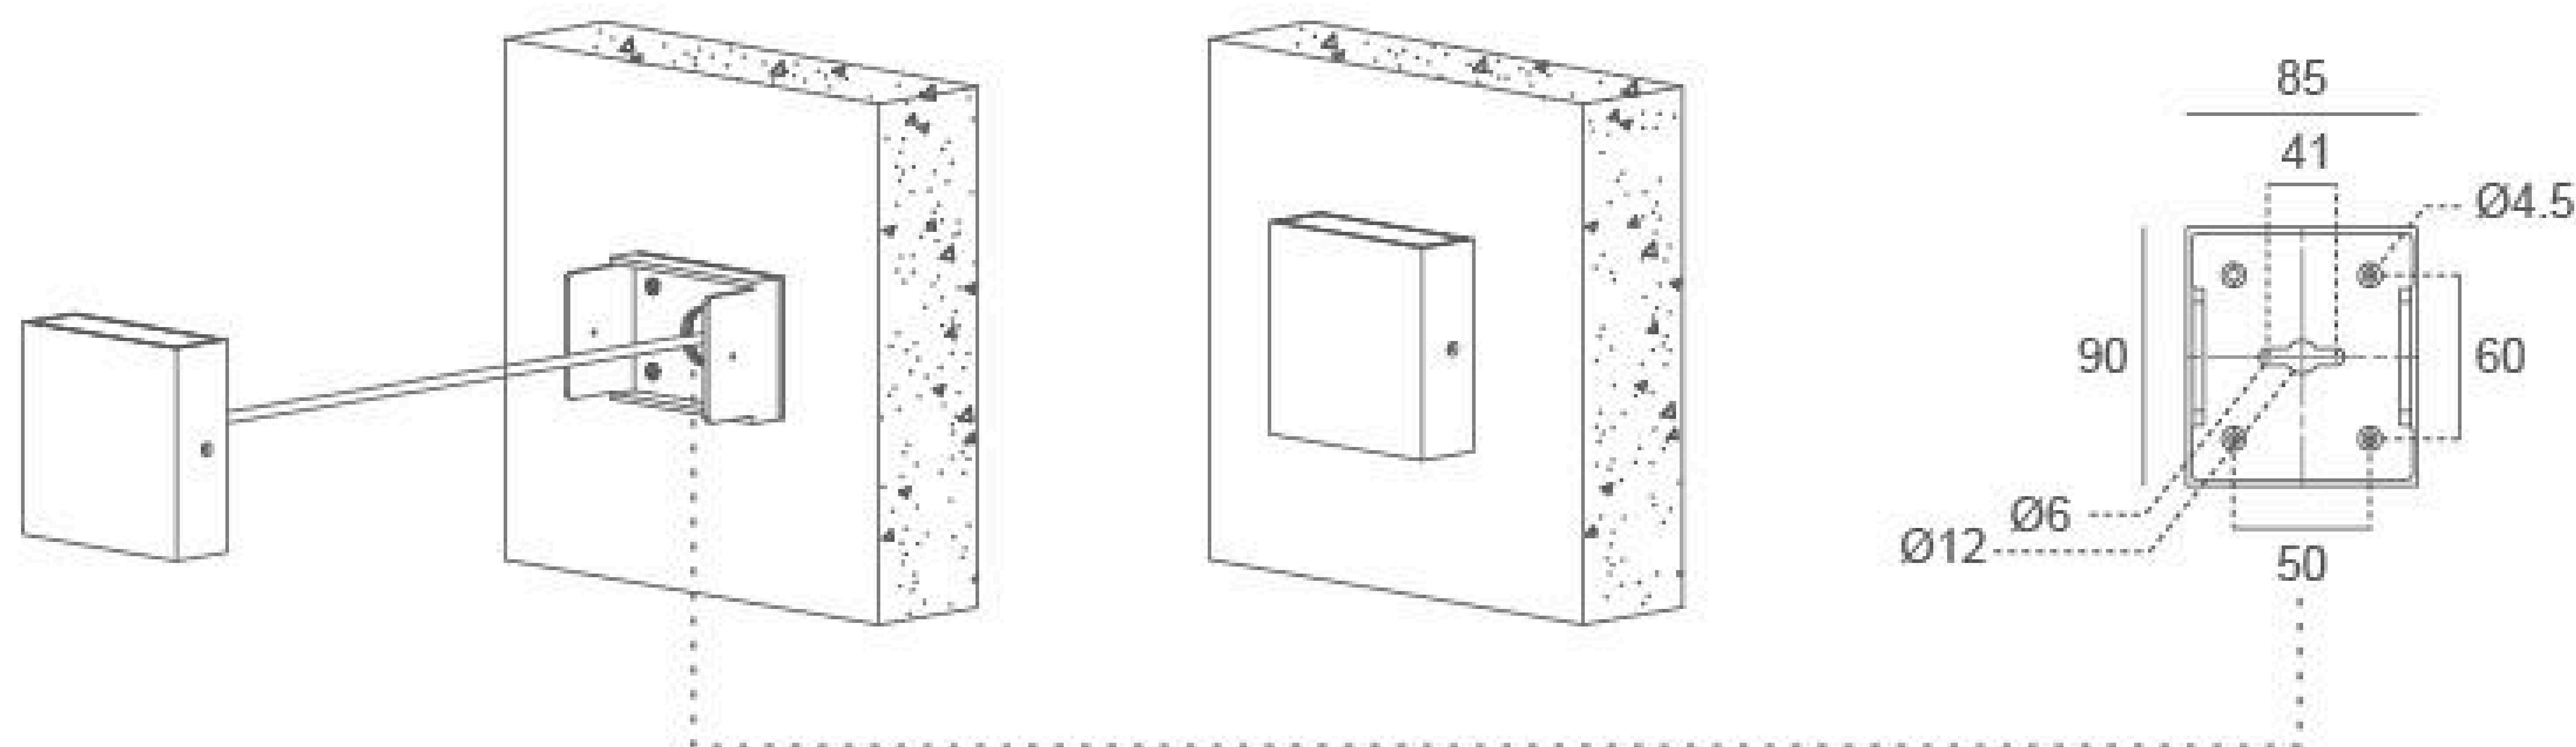

Photometric

12m	5.02 LUX
11m	
10m	7.23 LUX
9m	
8m	11.30 LUX
7m	
6m	20.10 LUX
5m	
4m	45.21 LUX
3m	
2m	180.86 LUX
1m	

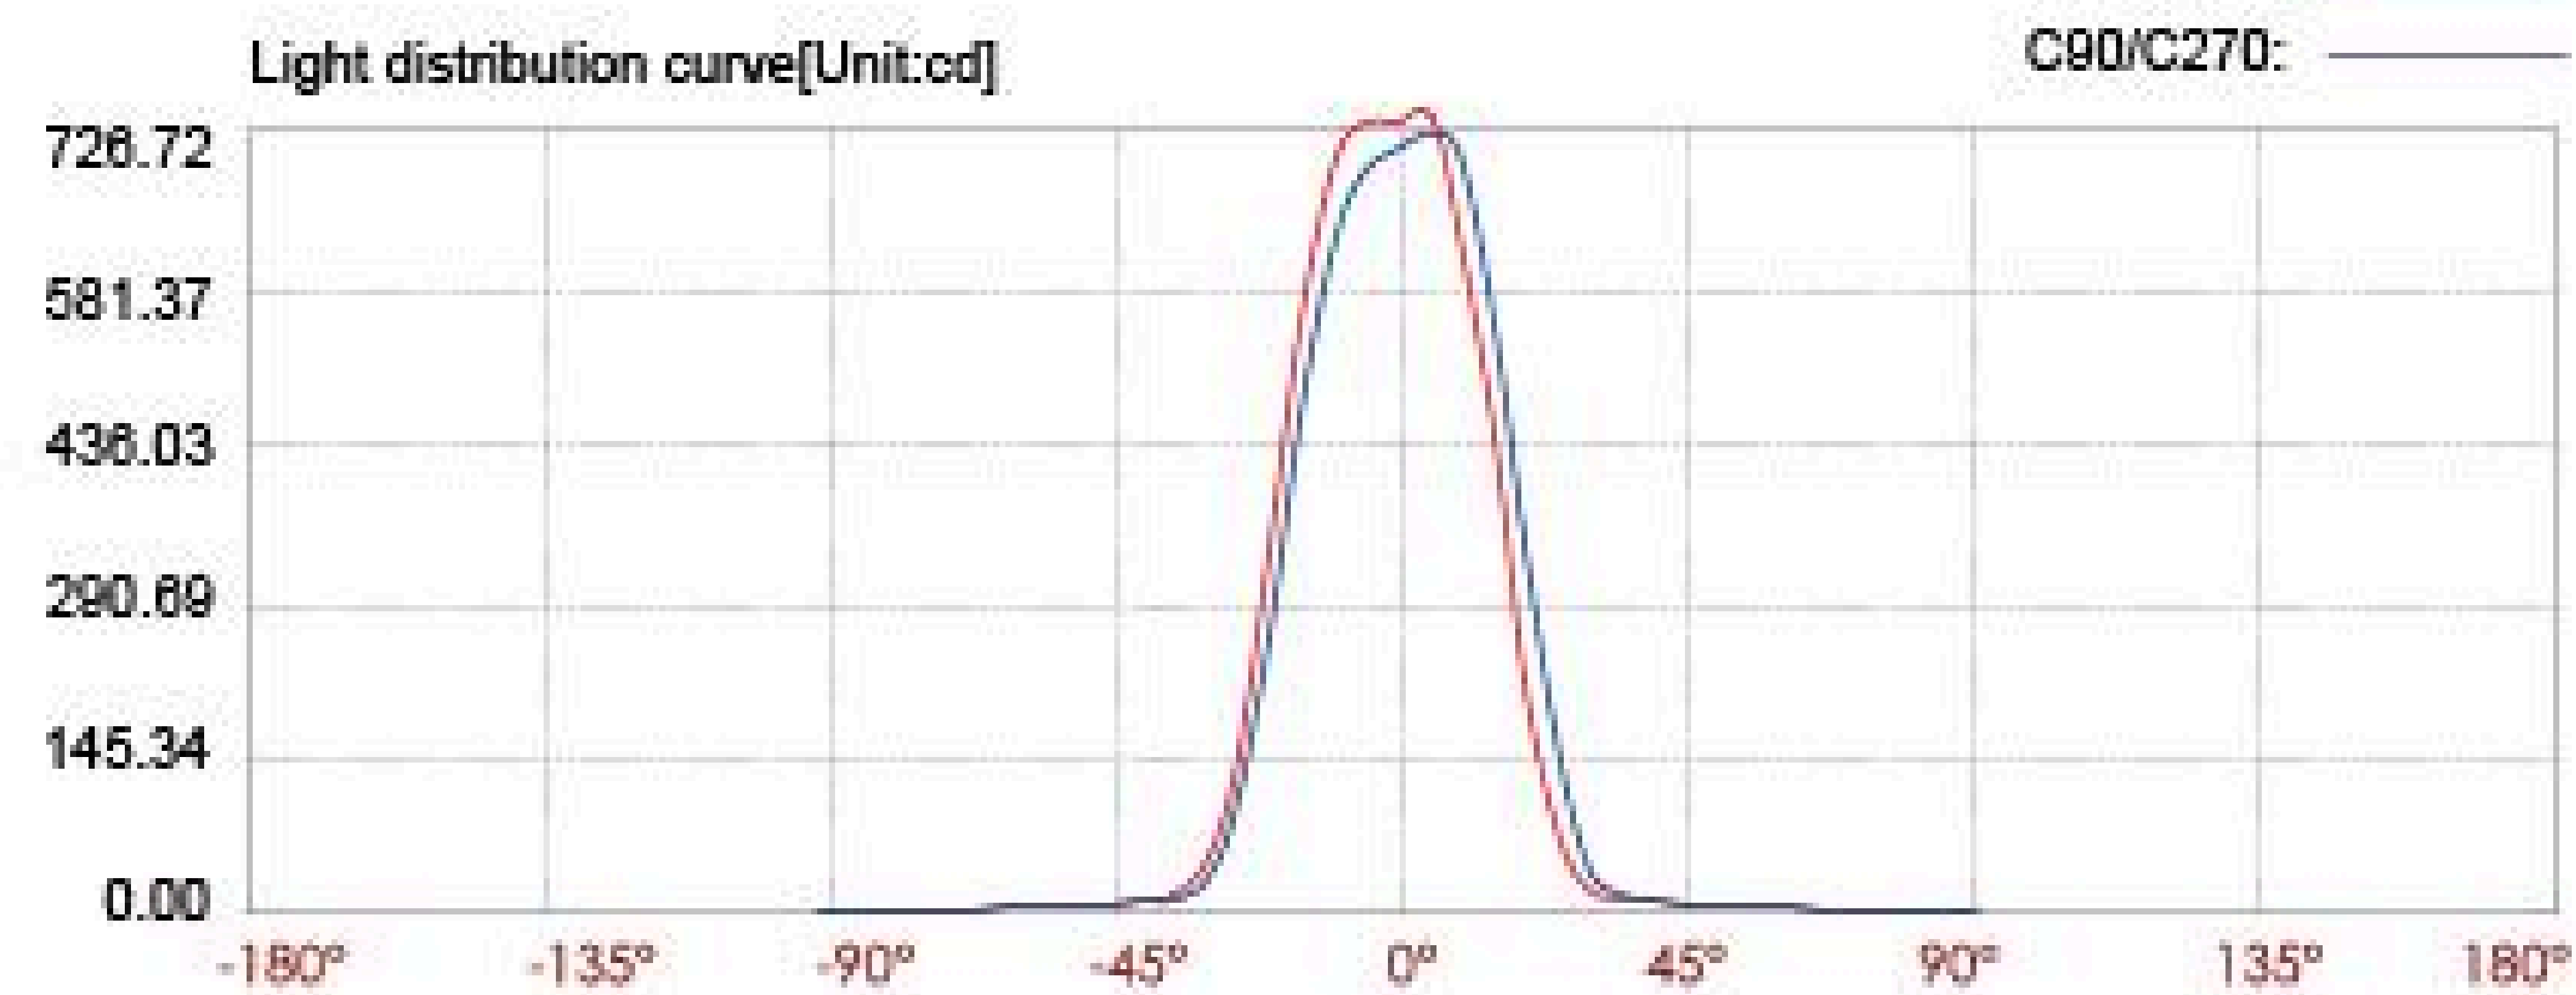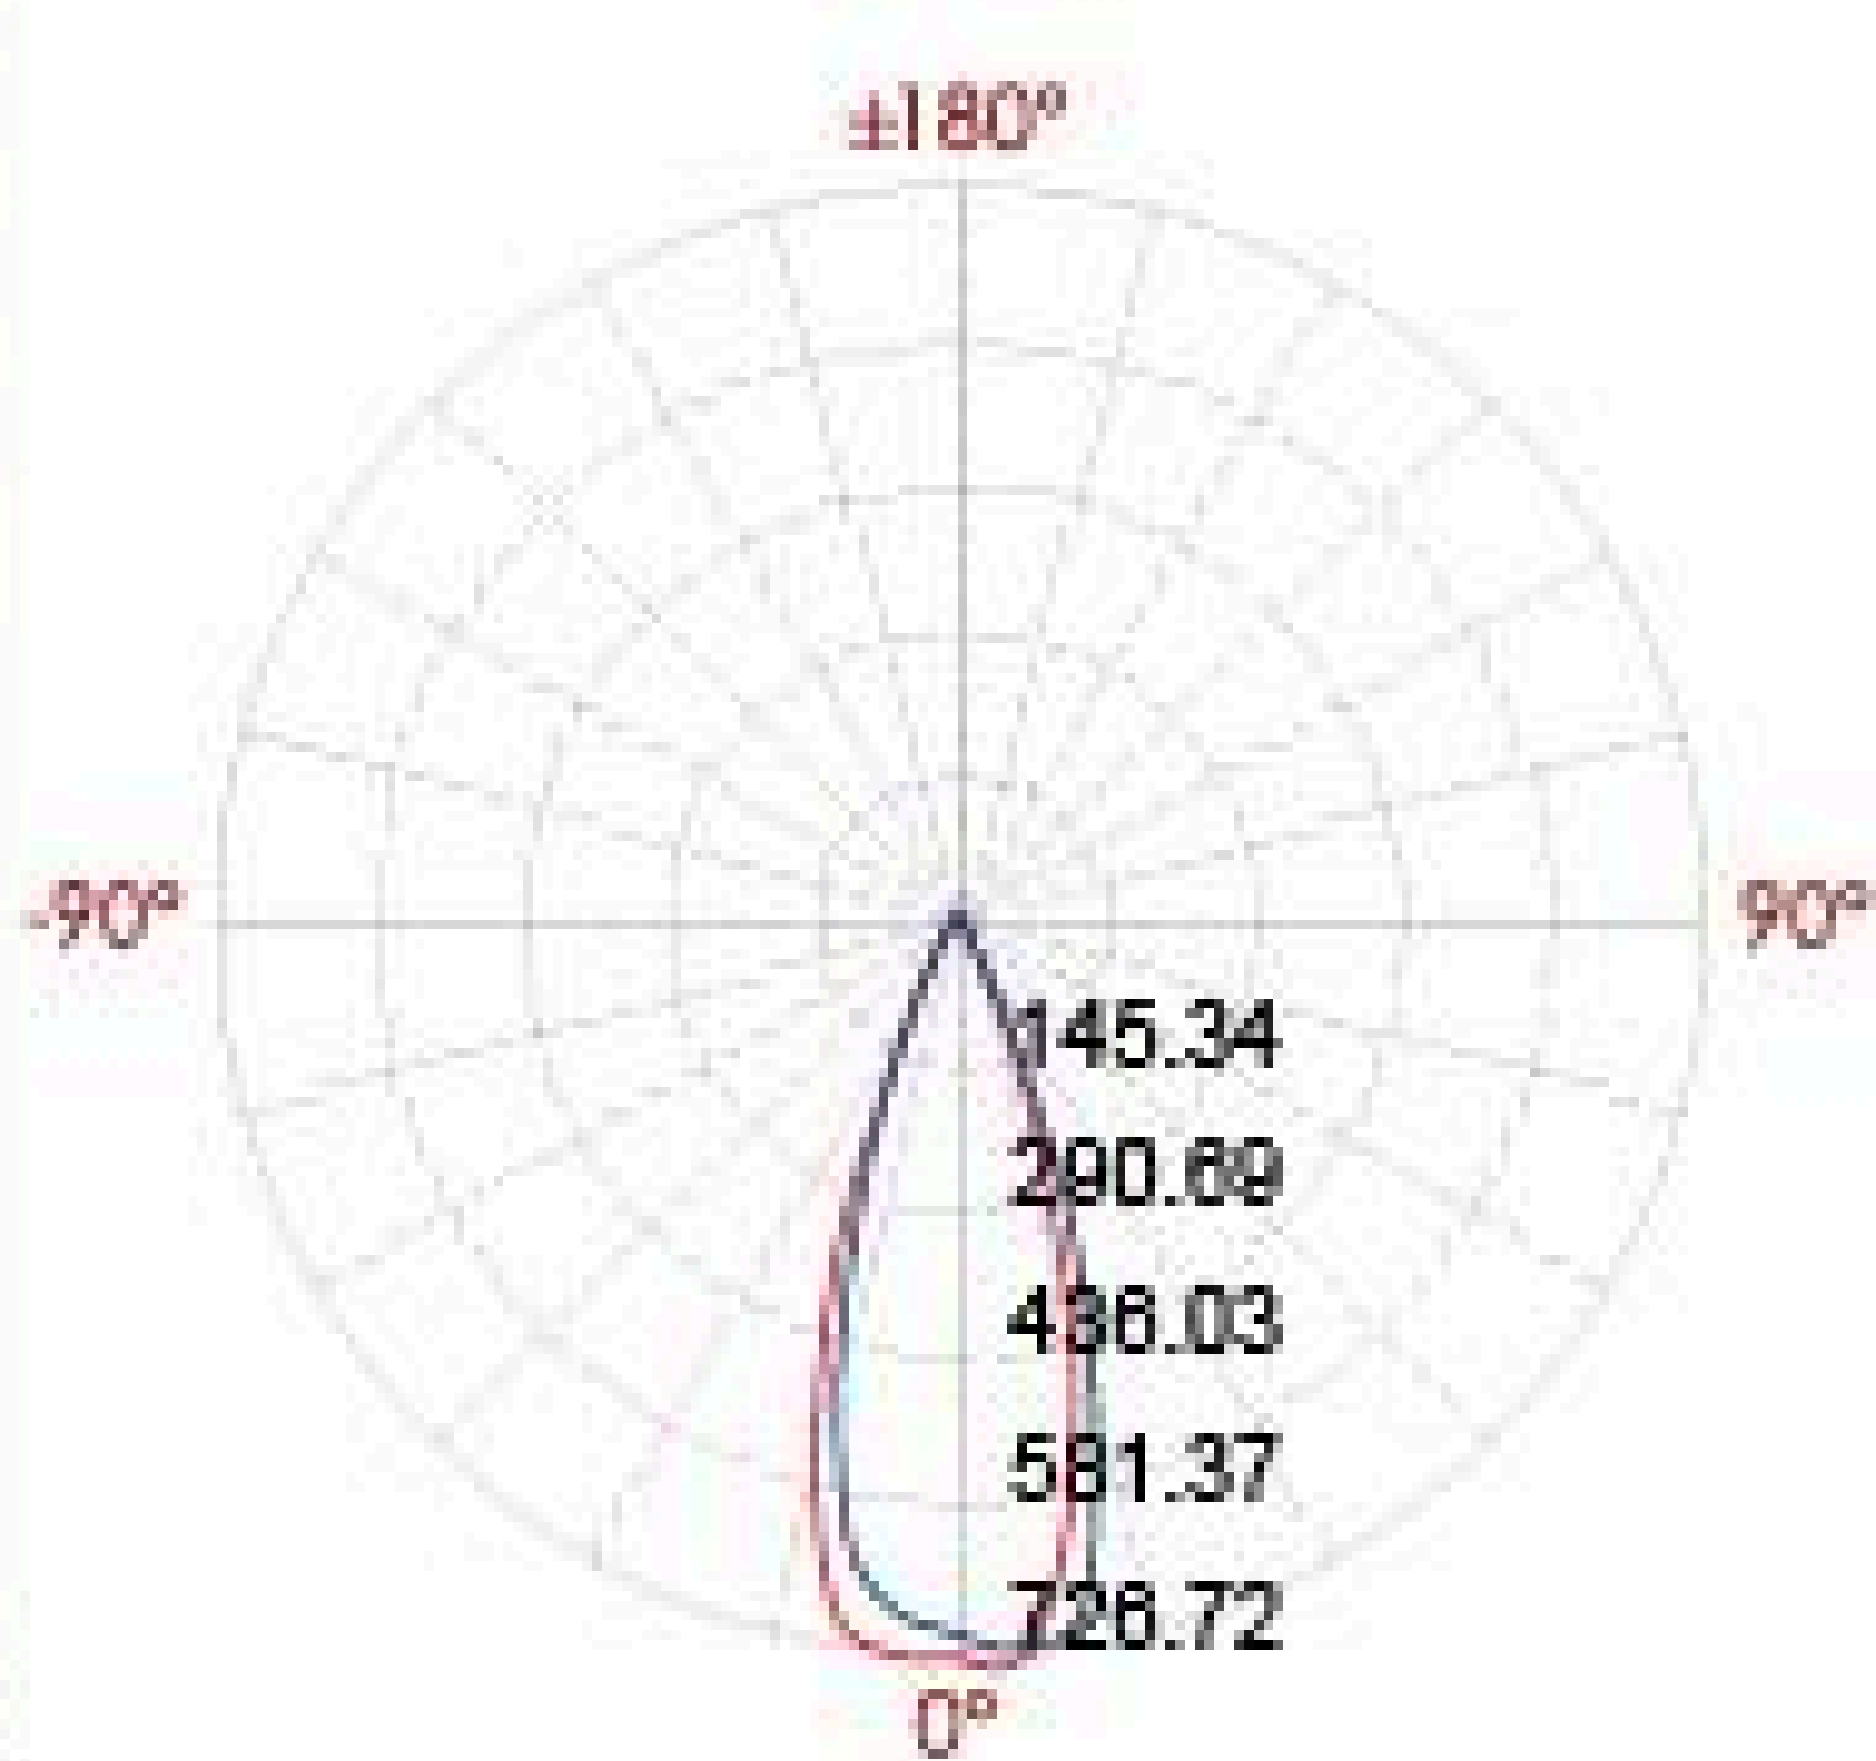

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	180.86 LUX	1.3m	1.2m
4m	45.21 LUX	2.6m	2.5m
6m	20.10 LUX	3.9m	3.7m
8m	11.30 LUX	5.1m	4.9m
10m	7.23 LUX	6.4m	6.2m
12m	5.02 LUX	7.7m	7.4m

Ver.Spread:35.7 Horiz.Spread:34.4