


07GQD0126

Linear Drawing

Light Source	1x6W
Lens	N/A
Selected Degree (°)θ1/2	60°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=270 240V=33
Consumption (W)	24V=6.5 240V=7.3
Luminance (LM)	WW=580
IK	08

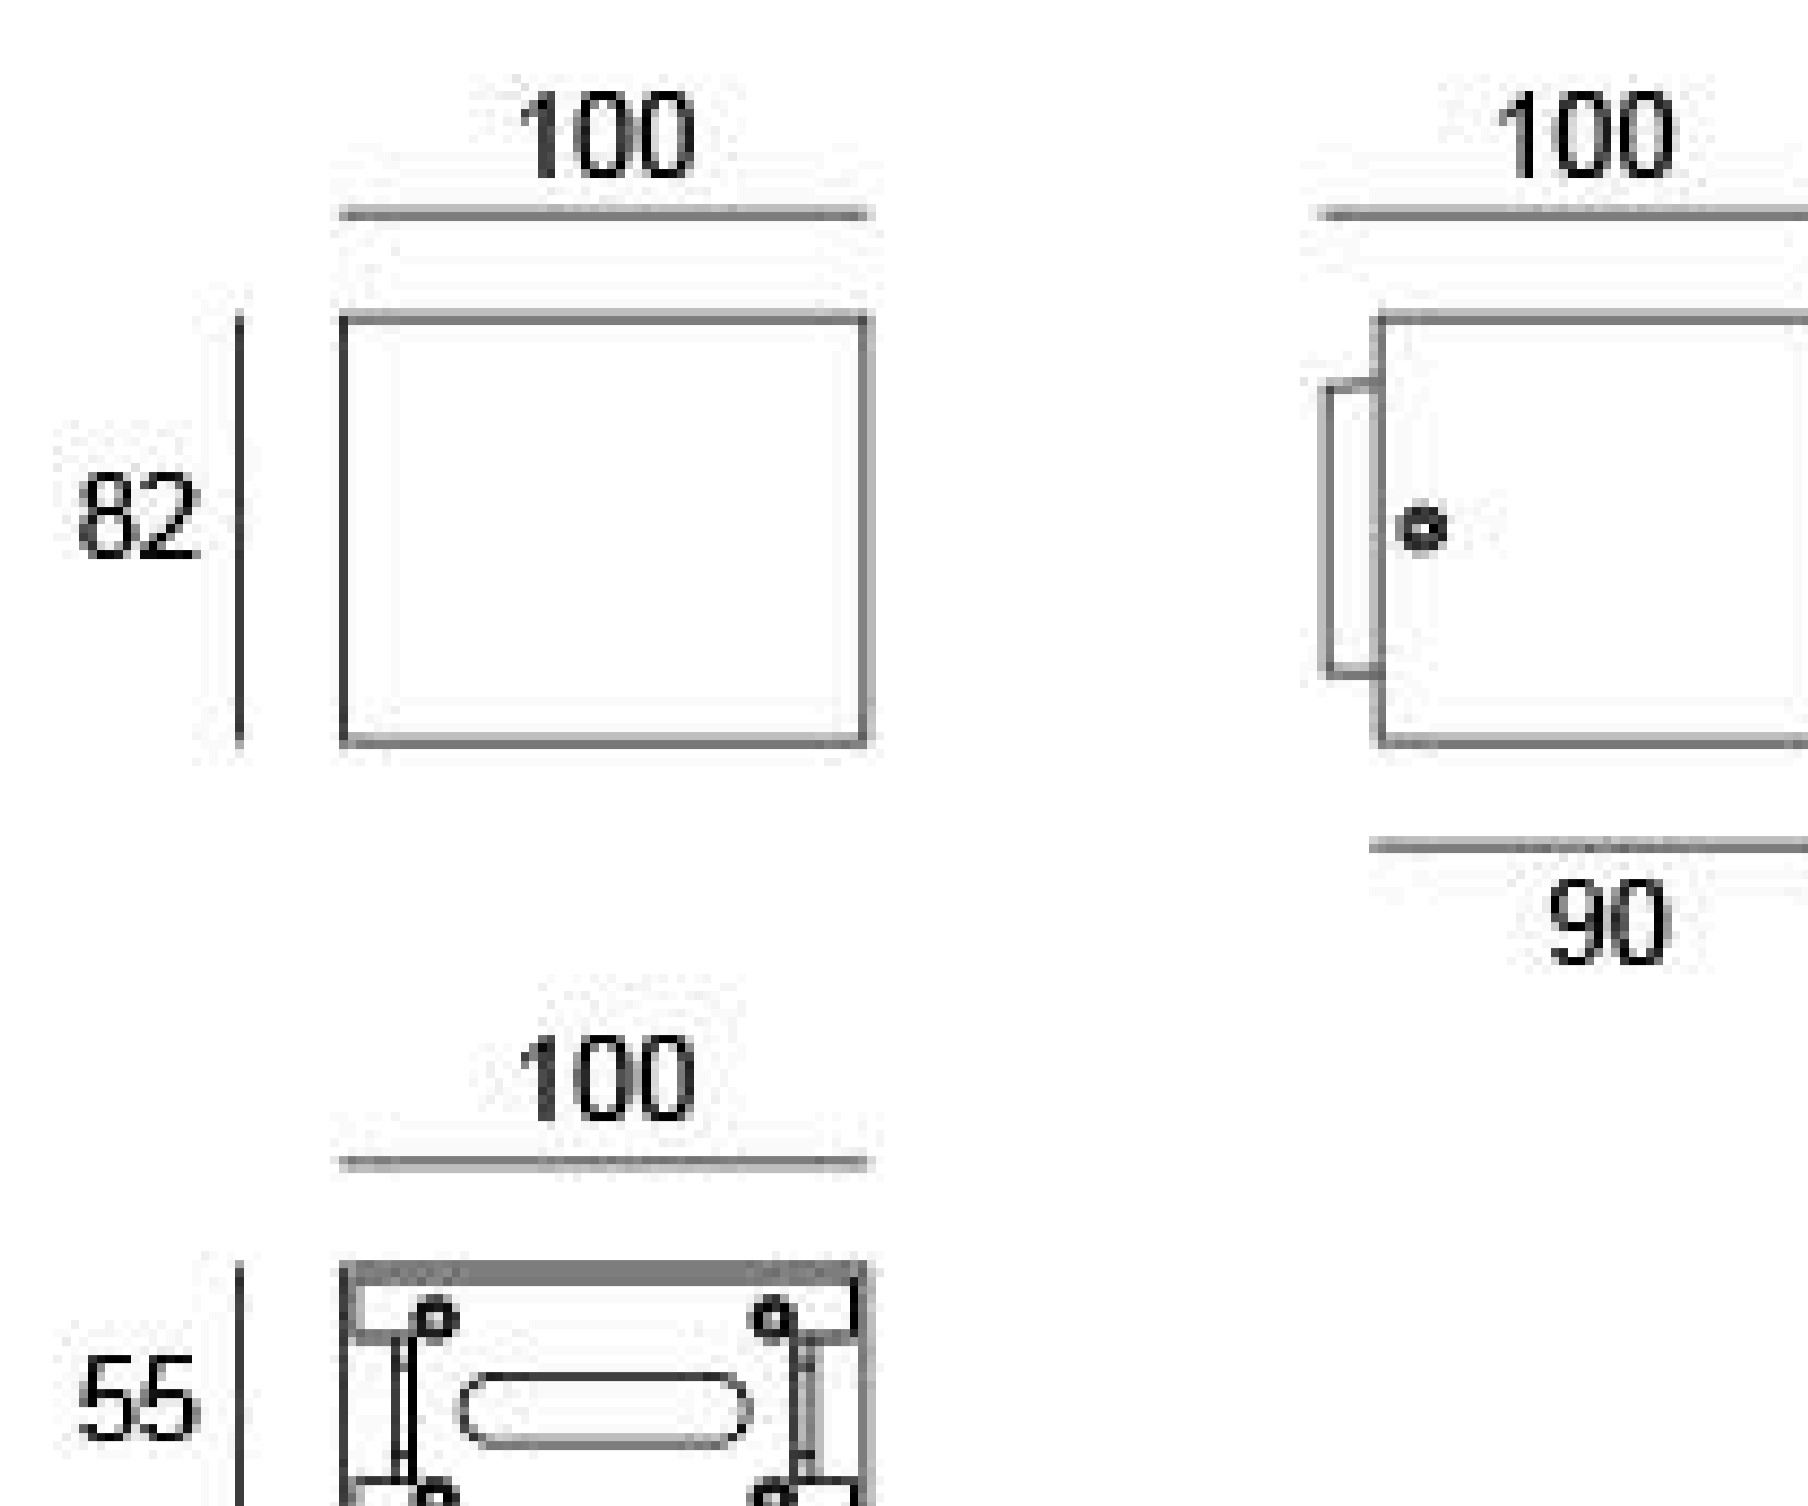

Unit: mm



Specification

Housing	12# Die-casting aluminum powder painting. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & Fireproof PC T=6mm
Driver	Built in on/off driver
LED Type	COB
Gasket	Waterproof silicone gasket
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color



Primary	
	Sanded Dark Grey KAP 7037
Secondary	
	Sanded Black RAL 9005
	Sanded Bronze KAP 7008
	Sanded White RAL 9003

Diagram of Instruction

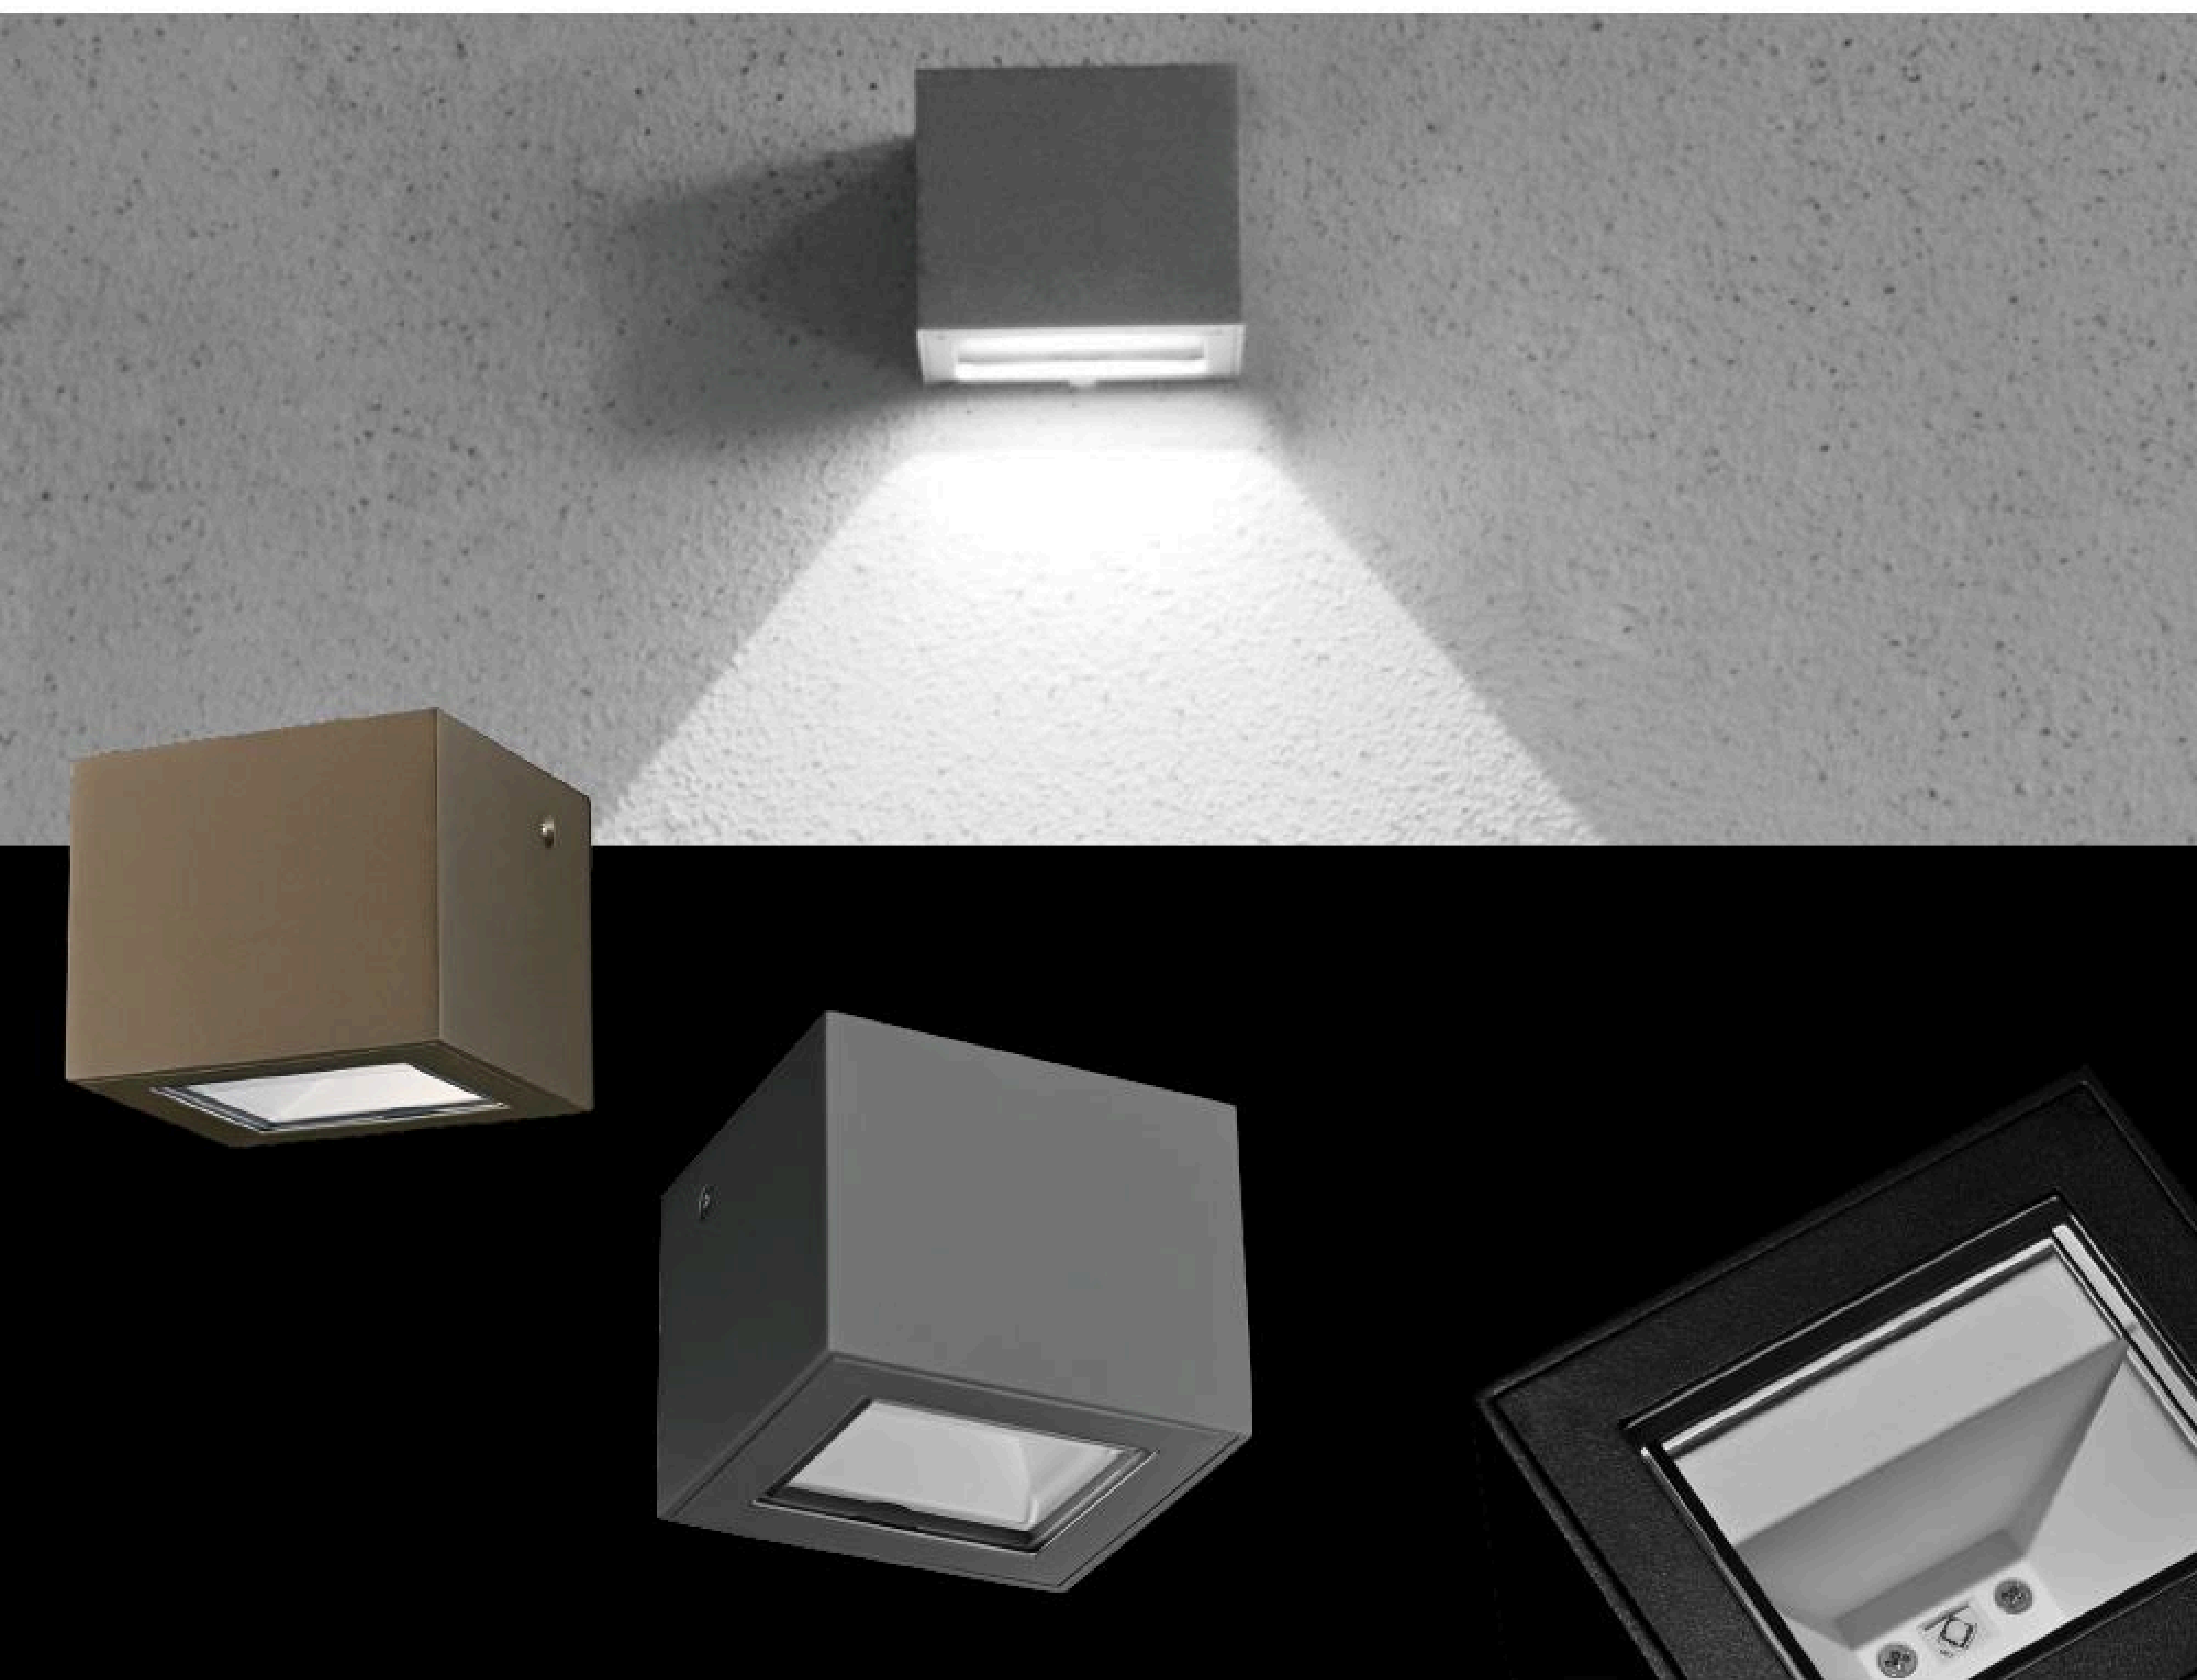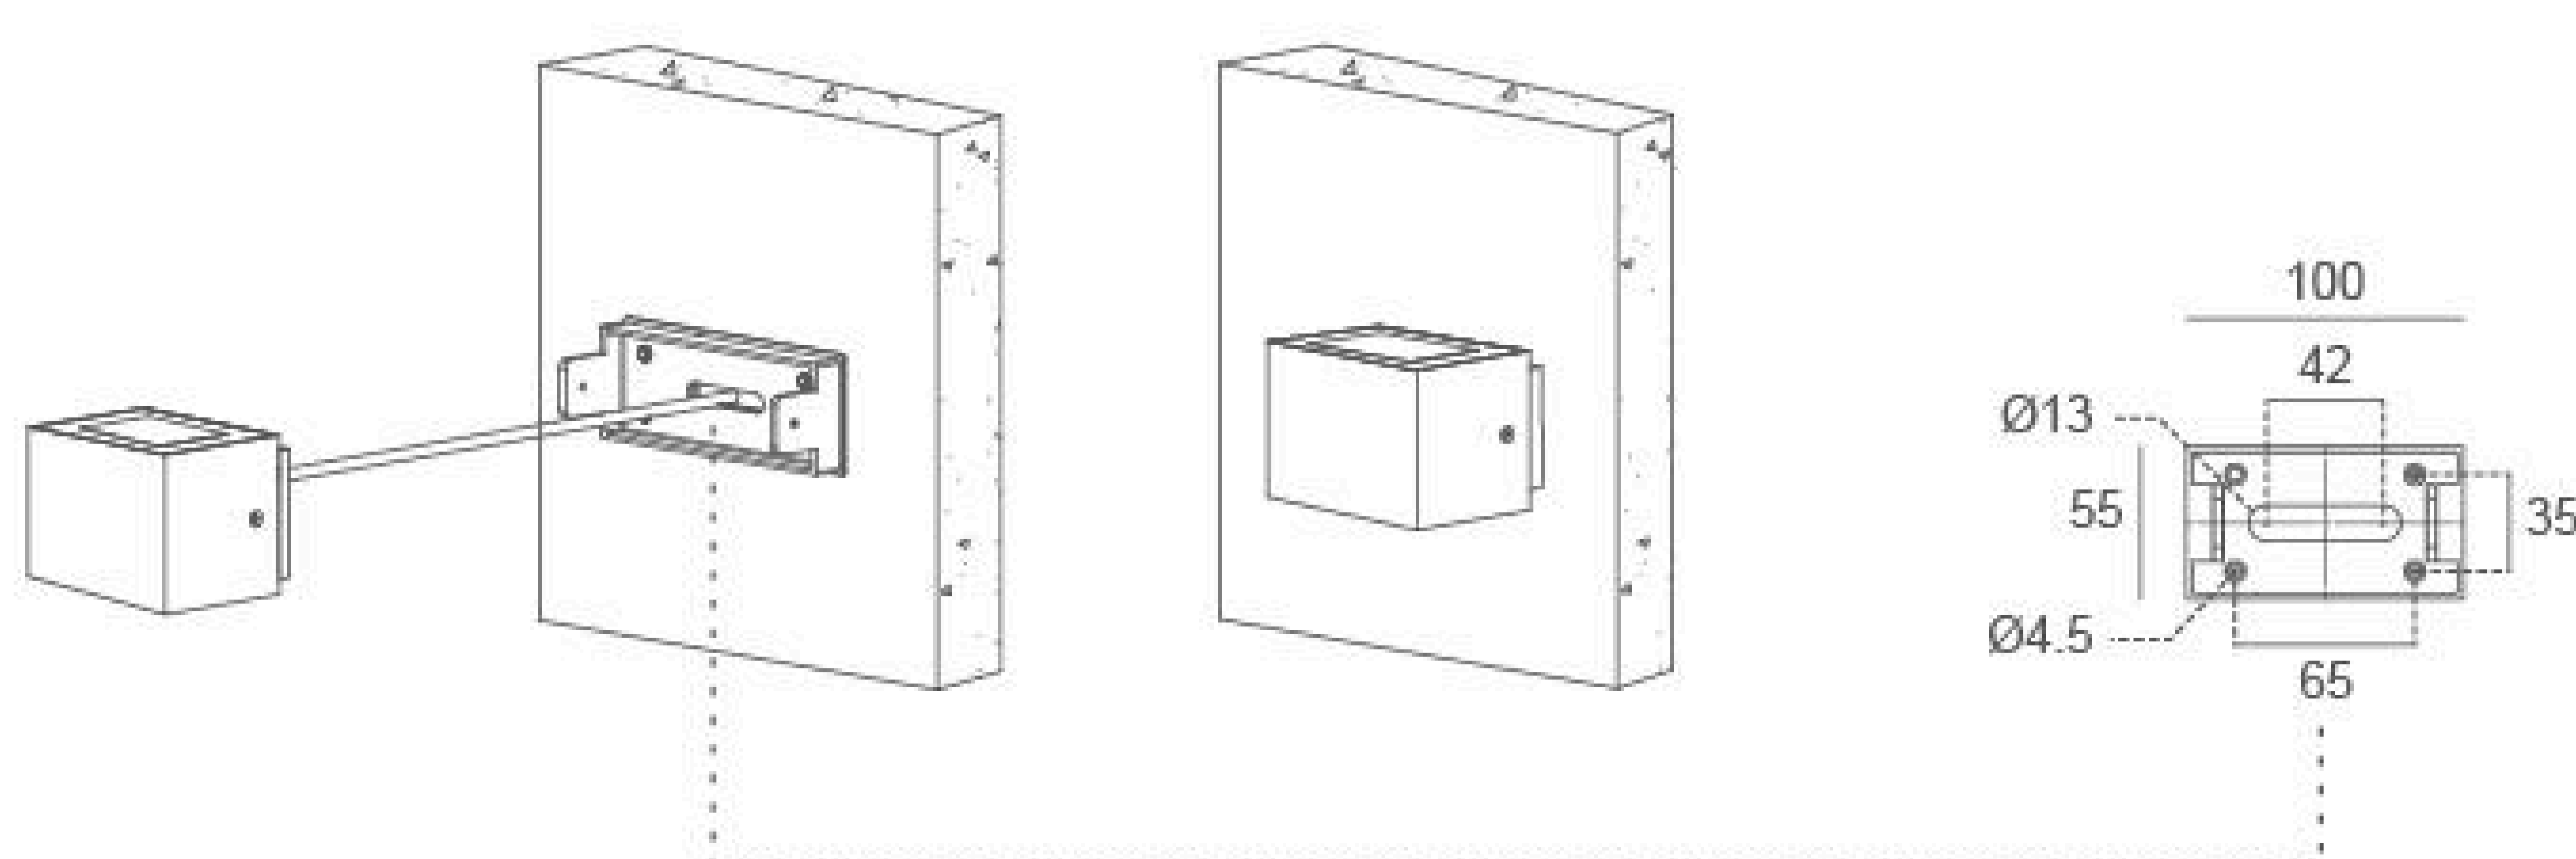

Photometric

12m	1.13 LUX
11m	
10m	1.63 LUX
9m	
8m	2.54 LUX
7m	
6m	4.52 LUX
5m	
4m	10.16 LUX
3m	
2m	40.65 LUX
1m	

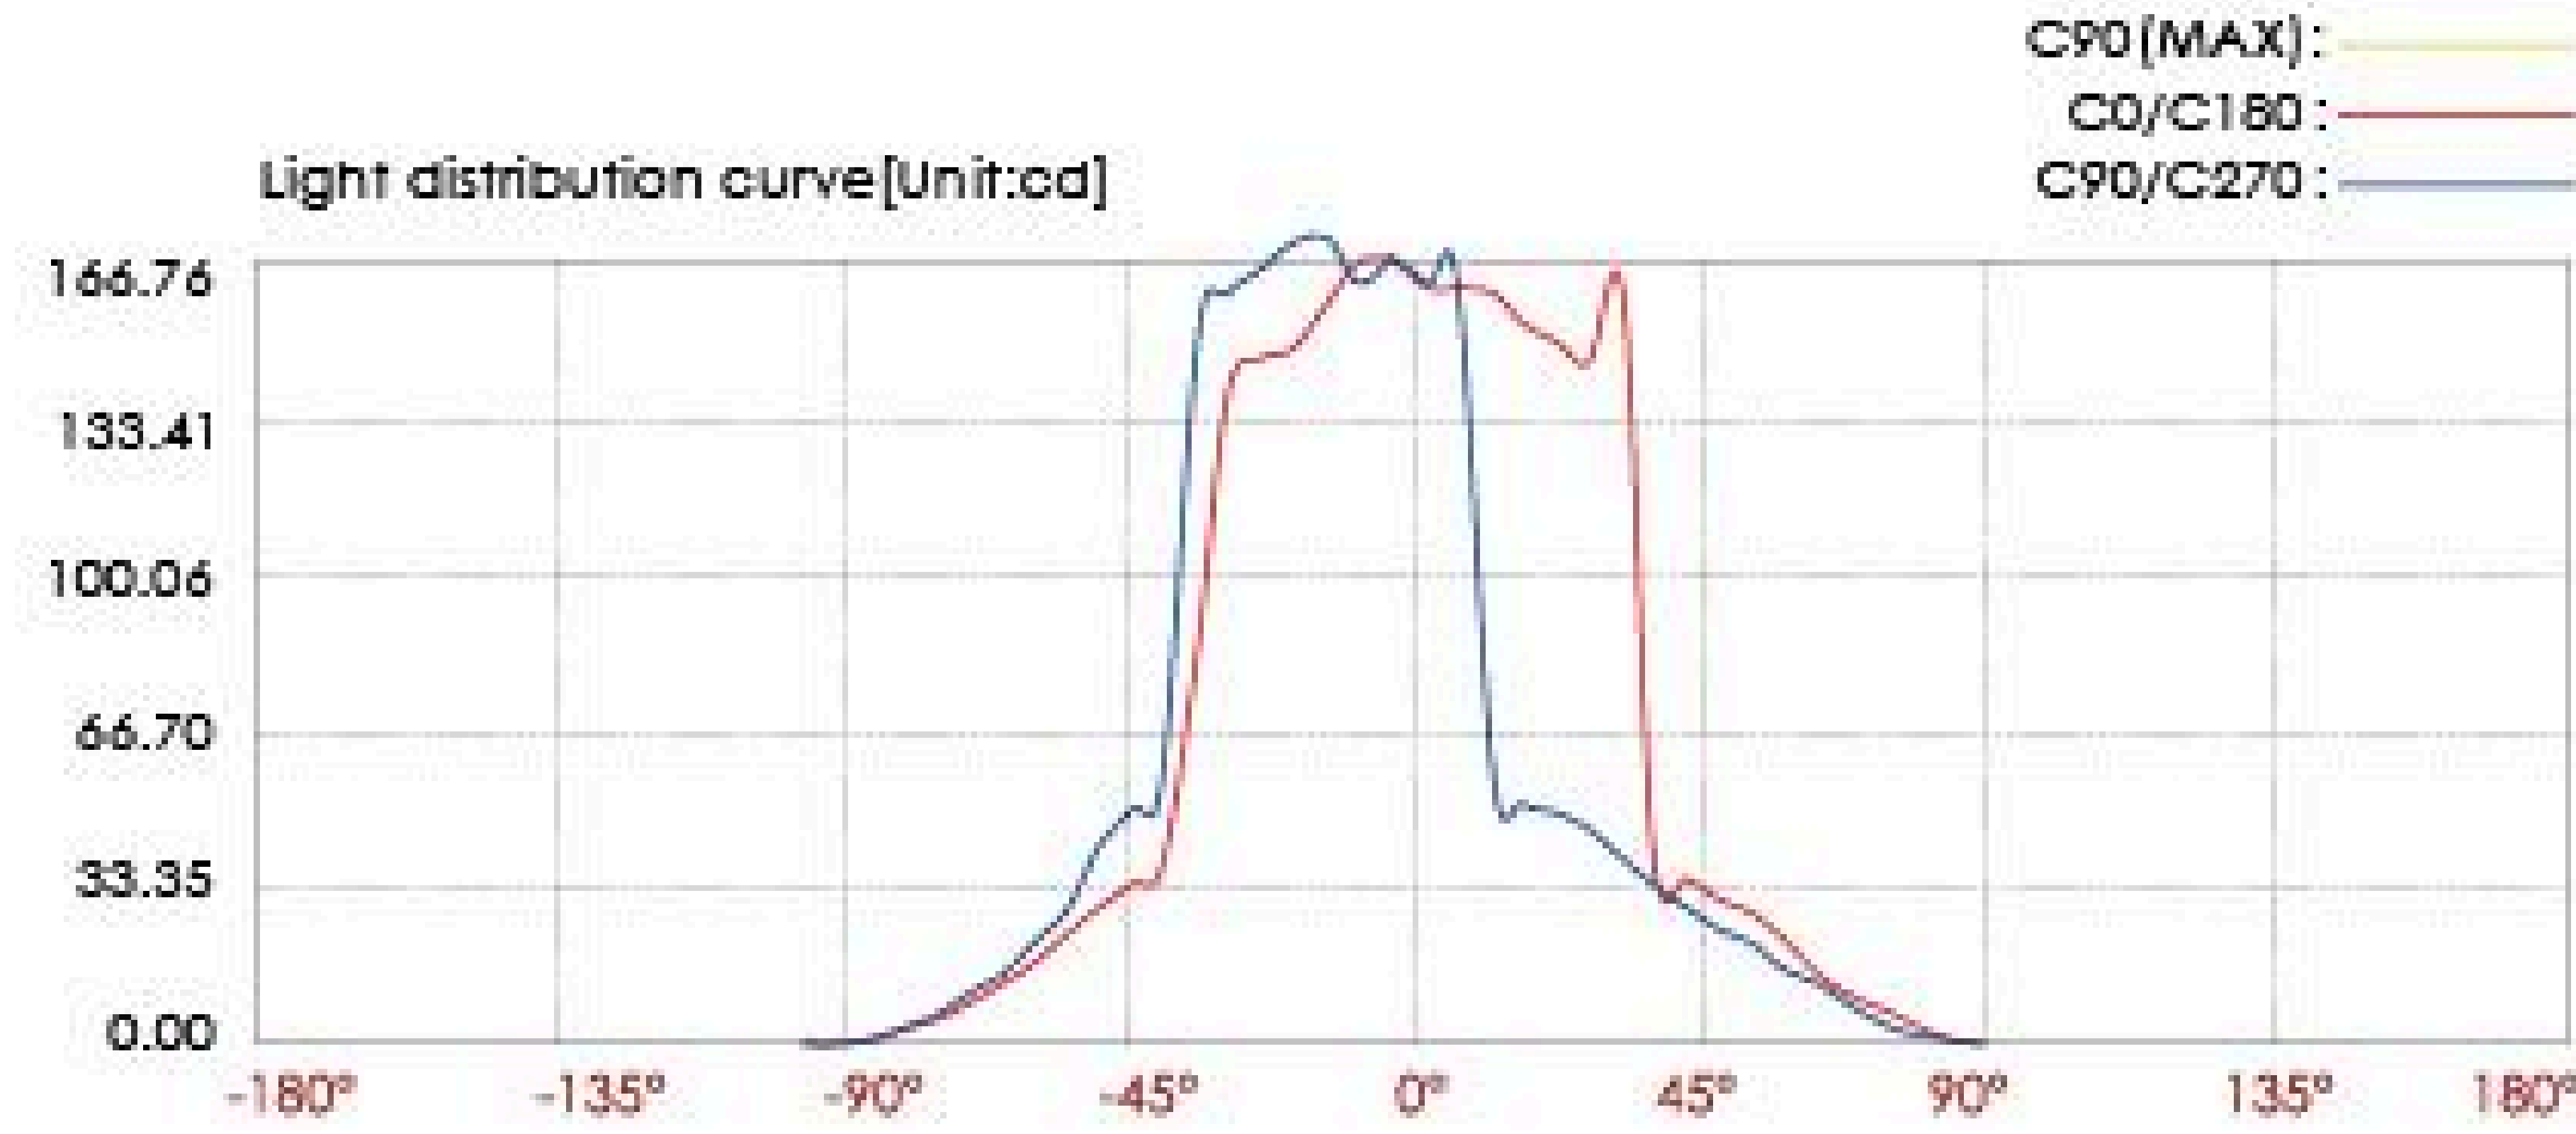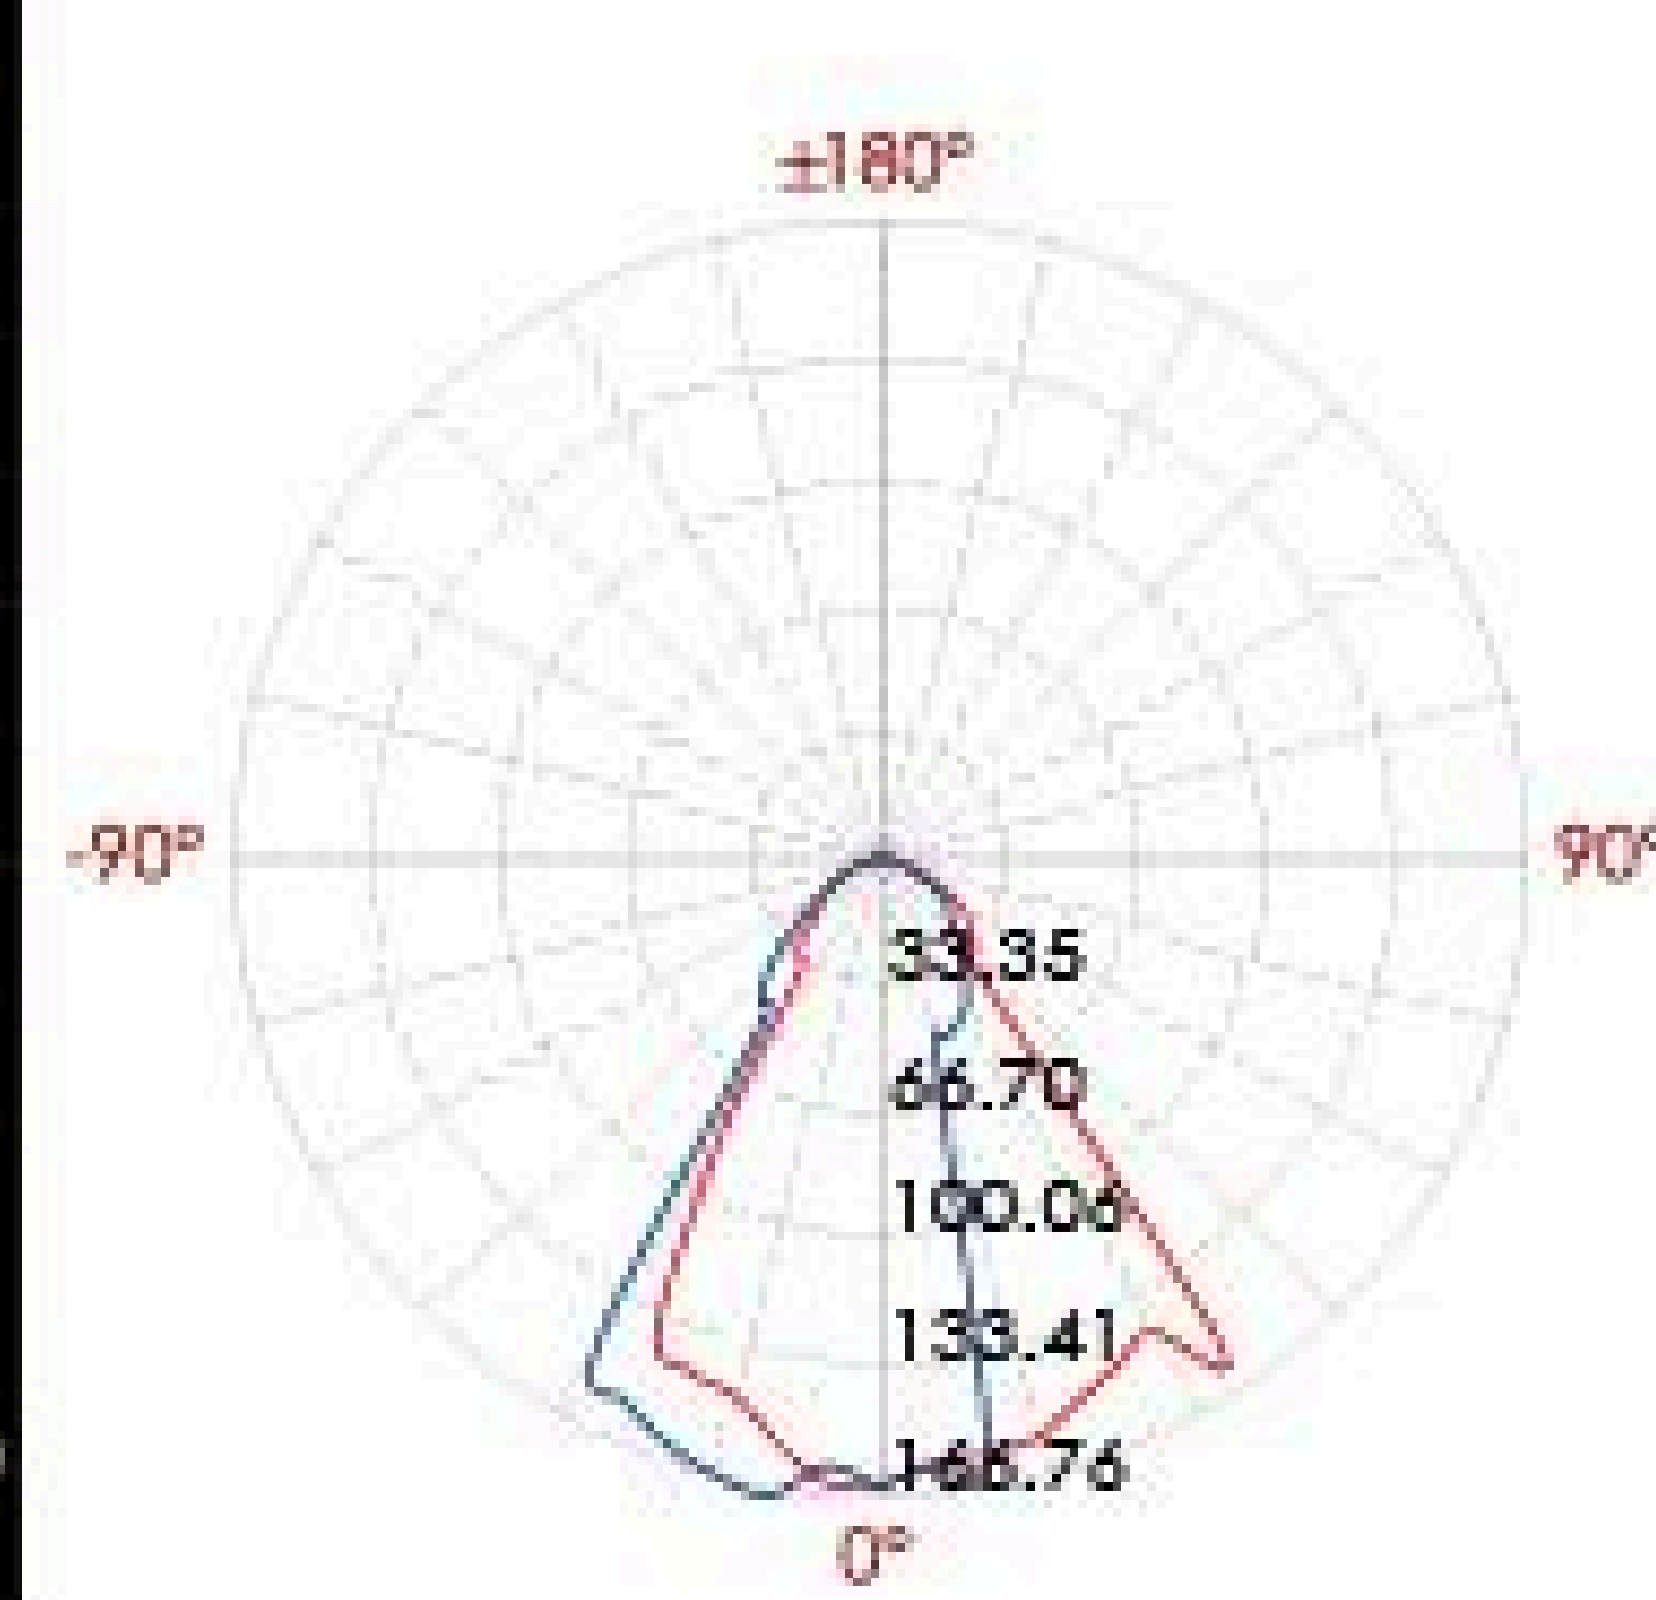

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	40.65 LUX	2.8m	1.7m
4m	10.16 LUX	5.6m	3.5m
6m	4.52 LUX	8.4m	5.2m
8m	2.54 LUX	11.3m	7.0m
10m	1.63 LUX	14.1m	8.7m
12m	1.13 LUX	16.9m	10.5m
Ver.Spread:70.3		Horiz.Spread:47.1	