


07GQD0656 (ONE SIDE)

| | |
|-------------------------|-----------------|
| Light Source | 6x1W |
| Selected Degree (°)θ1/2 | 80° x 85° |
| Input Voltage (V) | DC 24 AC 240 |
| Operating Current (MA) | 24V=270 240V=37 |
| Consumption (W) | 24V=6.5 240V=8 |
| Luminance (LM) | WW=347 |
| IK | 08 |

Specification

| | |
|-----------------------|--|
| Housing | 12# Die-casting aluminum powder painting T=60-80μm.Adhesion of ISO class 1/ASTM class 4B |
| Light Window | UVstop & Fireproof PC T=3mm |
| Gasket | Waterproof silicone gasket |
| Driver | Built in on/off driver |
| LED Type | SMD |
| Operating Temperature | -20°C-40°C |
| Power Cable | Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.3m 240V: H05RN-F 3×1.0mm ² , L=0.3m |
| Dimming Support | External DALI supported TRIAC,0-10V, PWM via external driver on request |


Linear Drawing

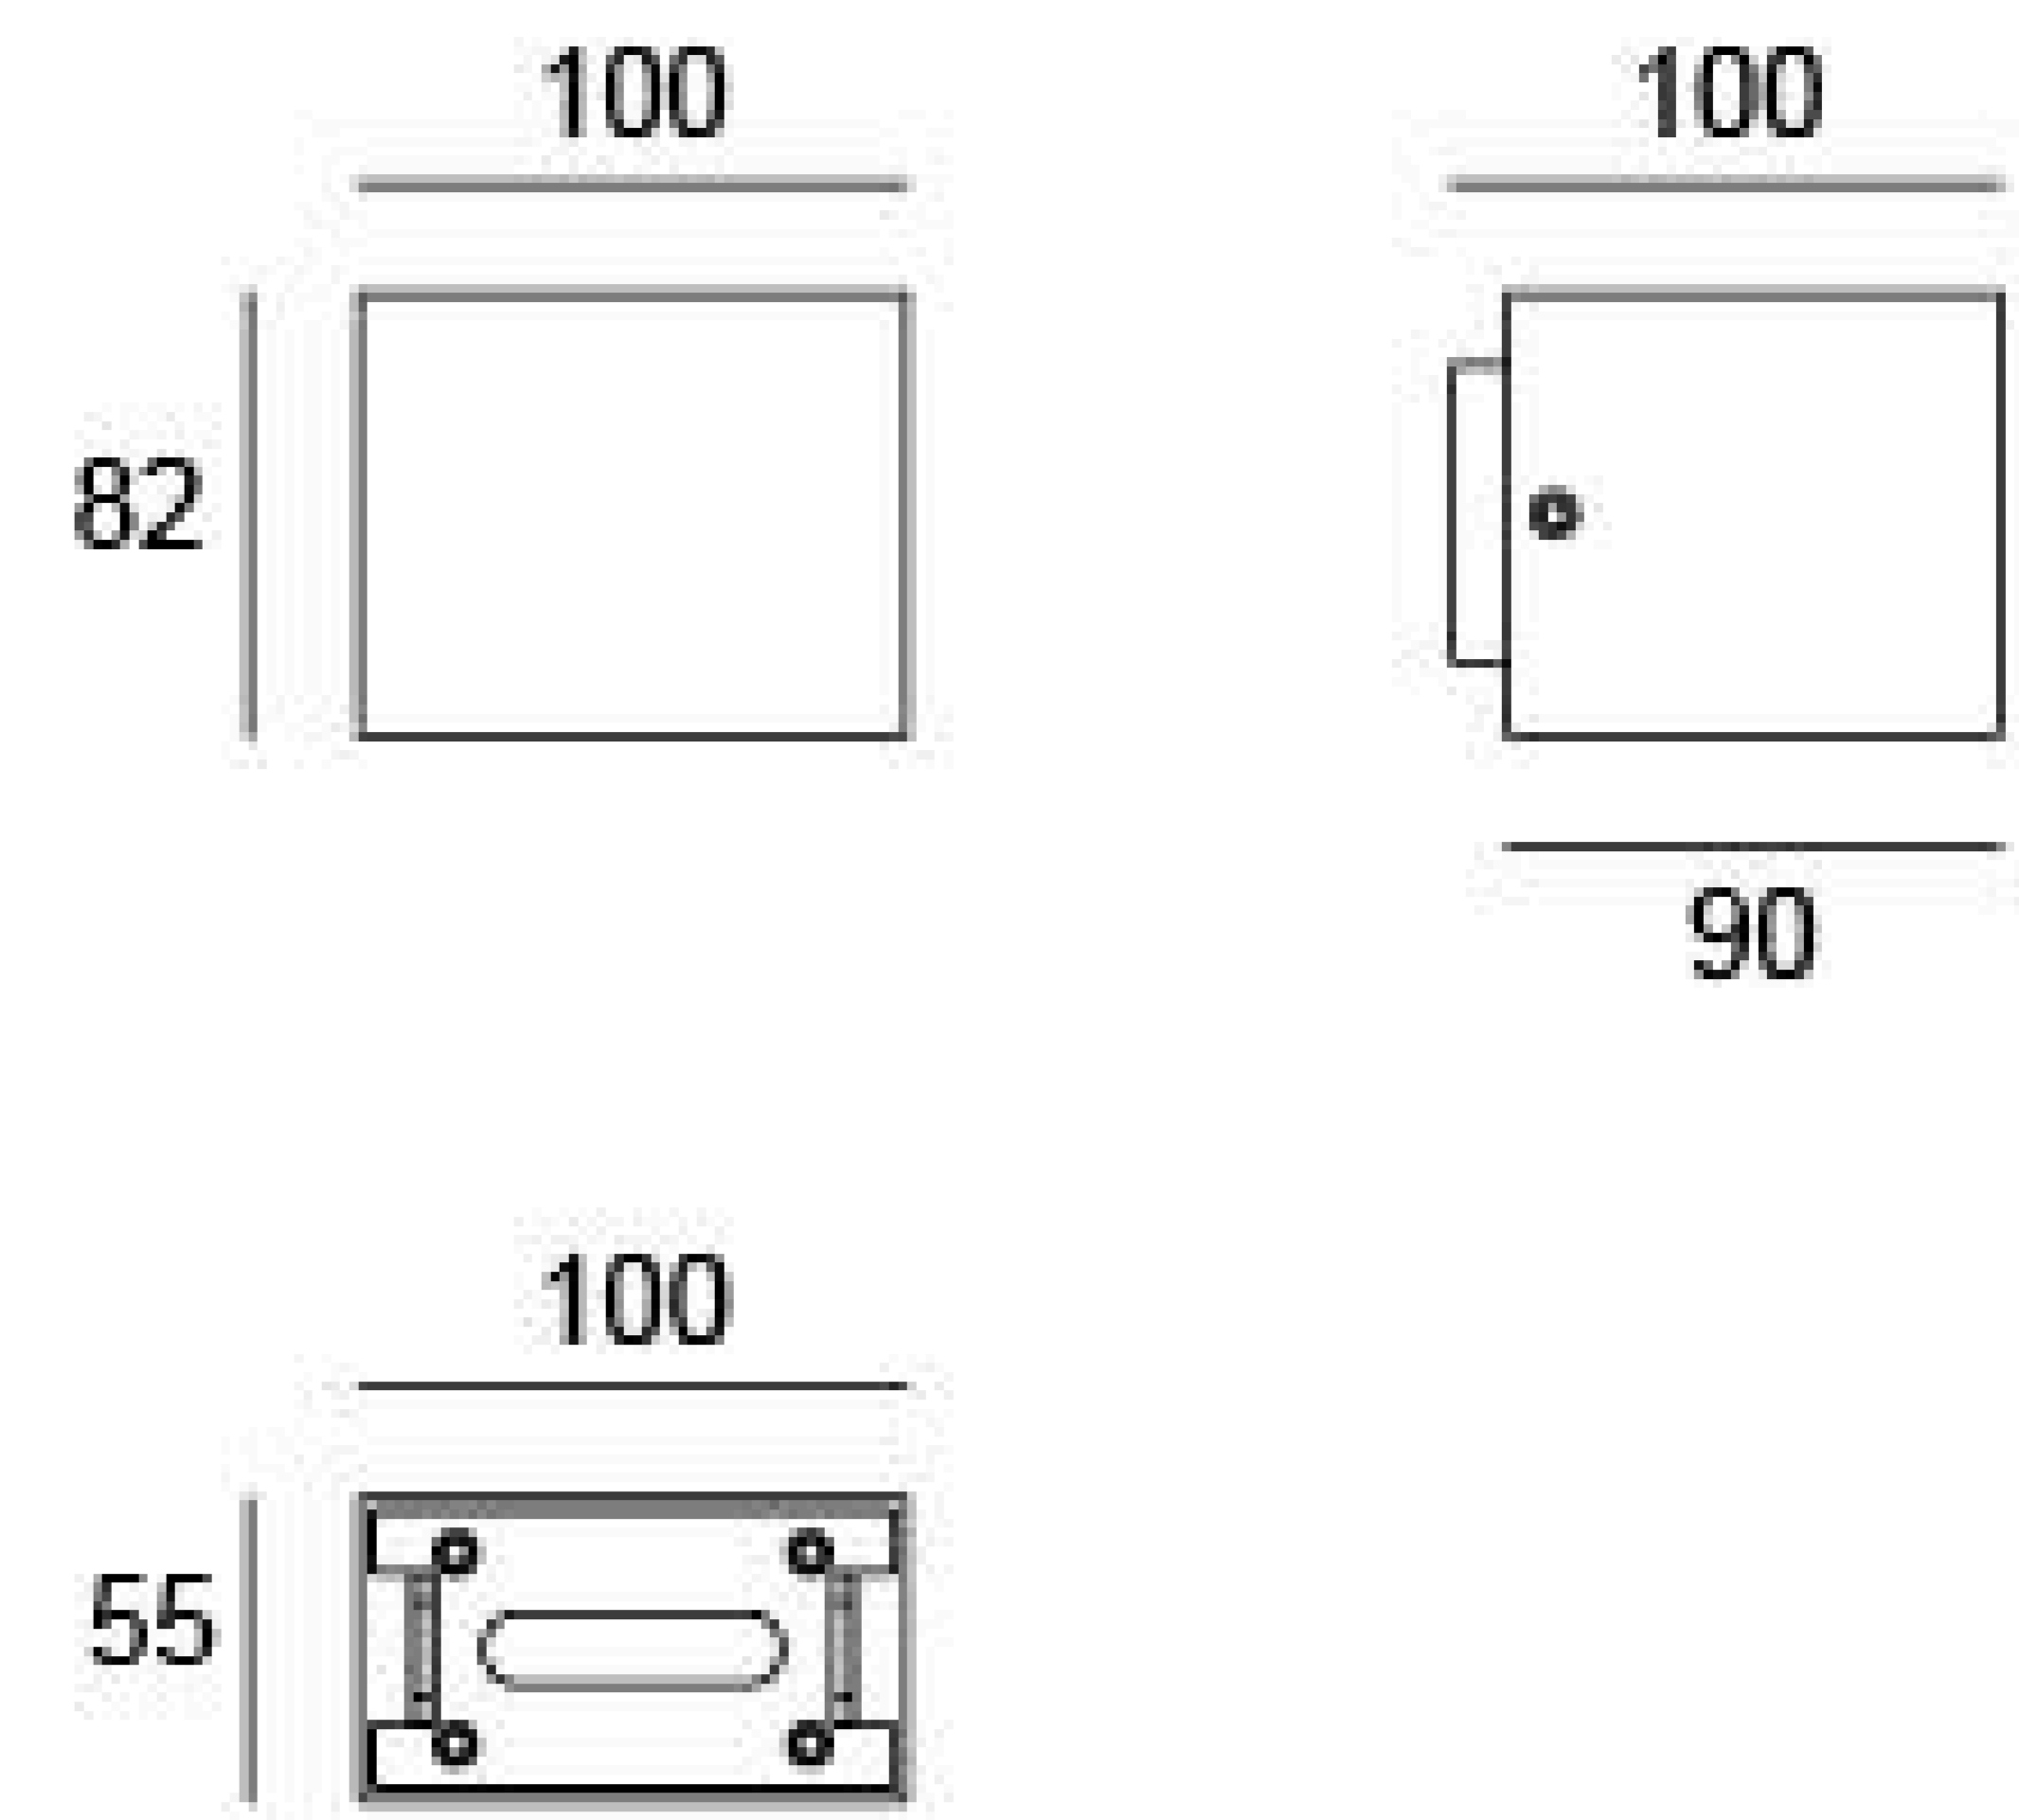

Unit: mm


Painting Color

Primary

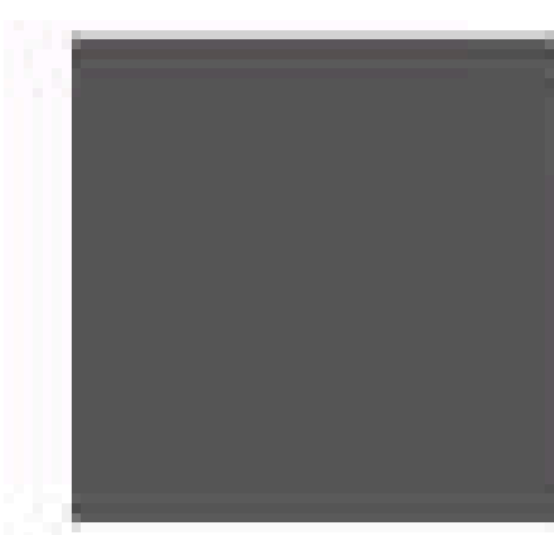

Sanded Dark Grey
KAP 7037


Secondary




Sanded Black
RAL 9005



Smoke Grey
KAP 7043

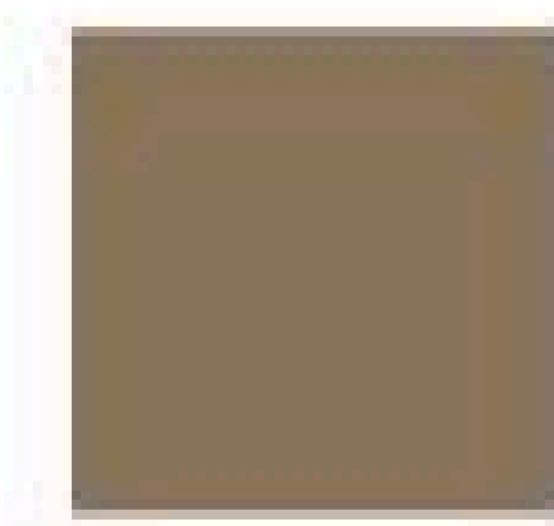


Sanded Bronze
KAP 7008

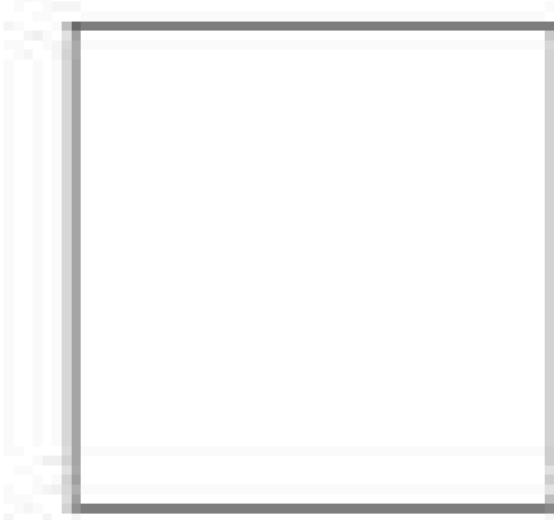

Sanded White
RAL 9003



Diagram of Instruction

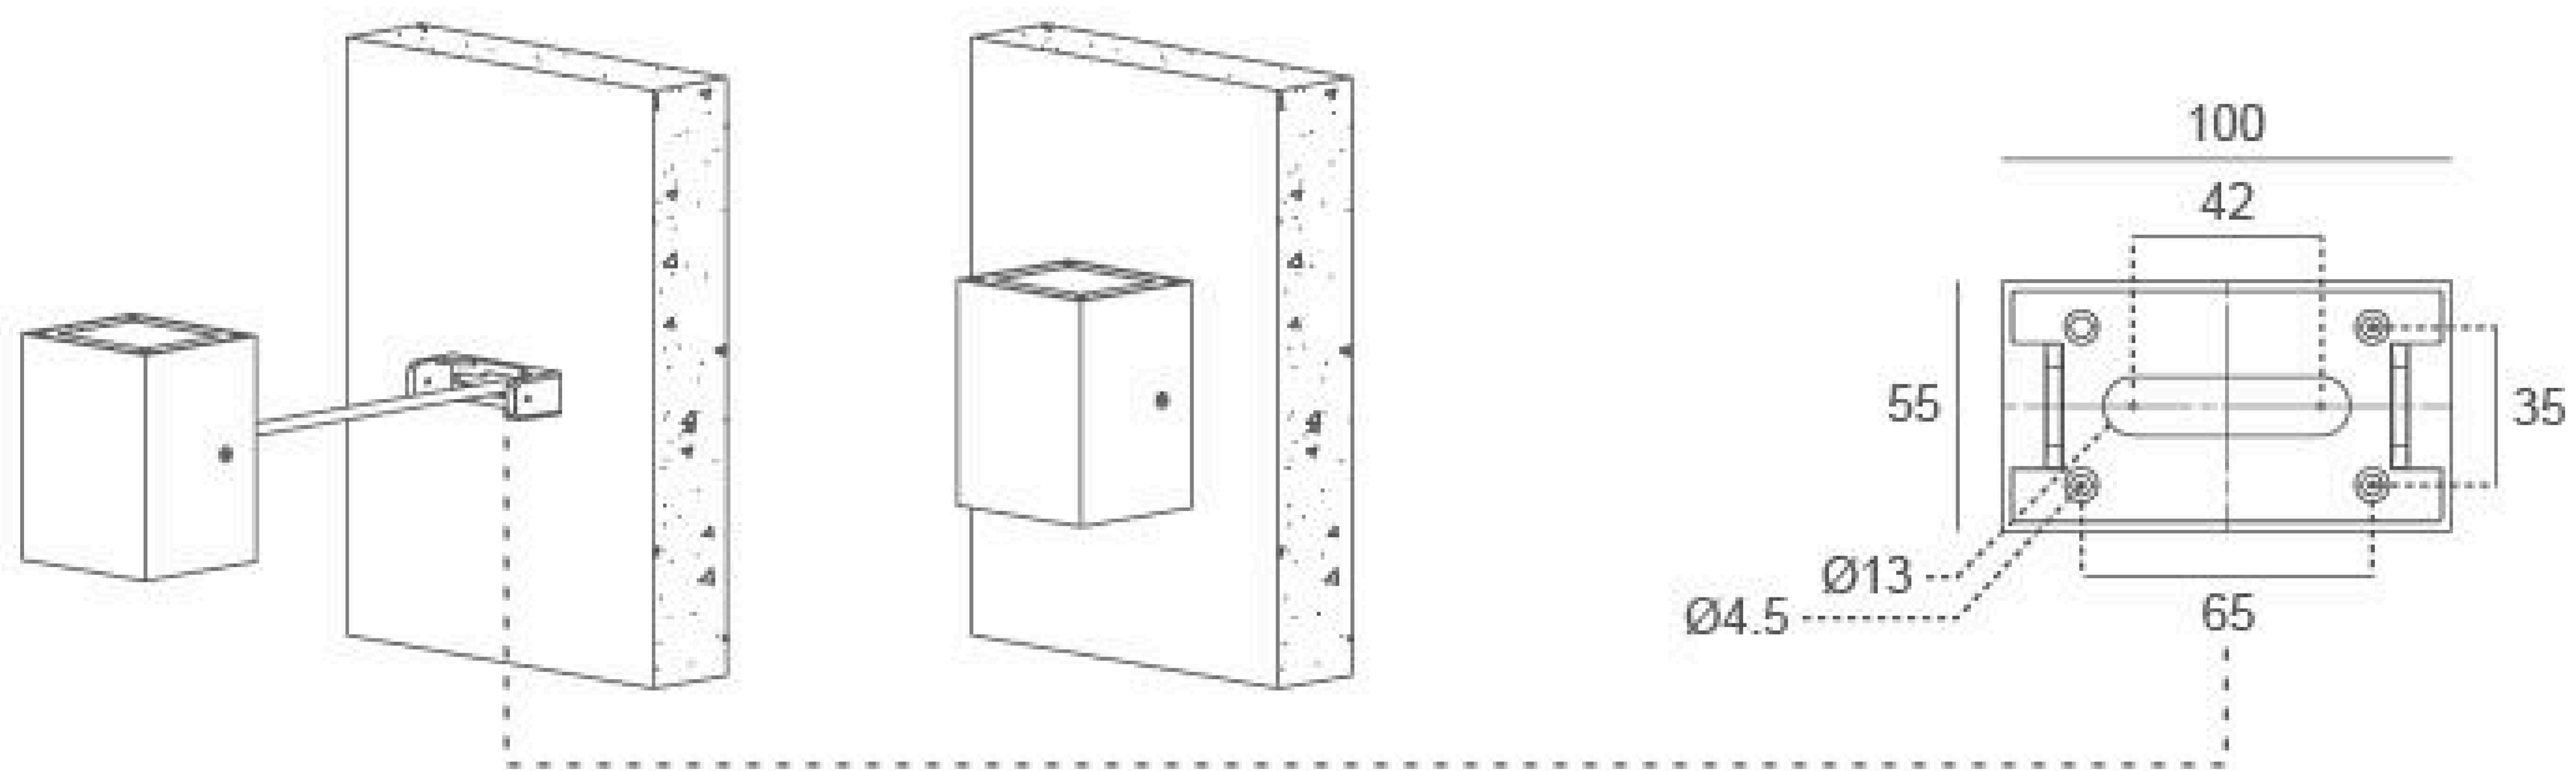

Photometric

| | |
|-----|-----------|
| 12m | 1.73 LUX |
| 11m | |
| 10m | 2.49 LUX |
| 9m | |
| 8m | 3.89 LUX |
| 7m | |
| 6m | 6.91 LUX |
| 5m | |
| 4m | 15.56 LUX |
| 3m | |
| 2m | 62.22 LUX |
| 1m | |

07GQD0656 (6x1W-80°x85°)

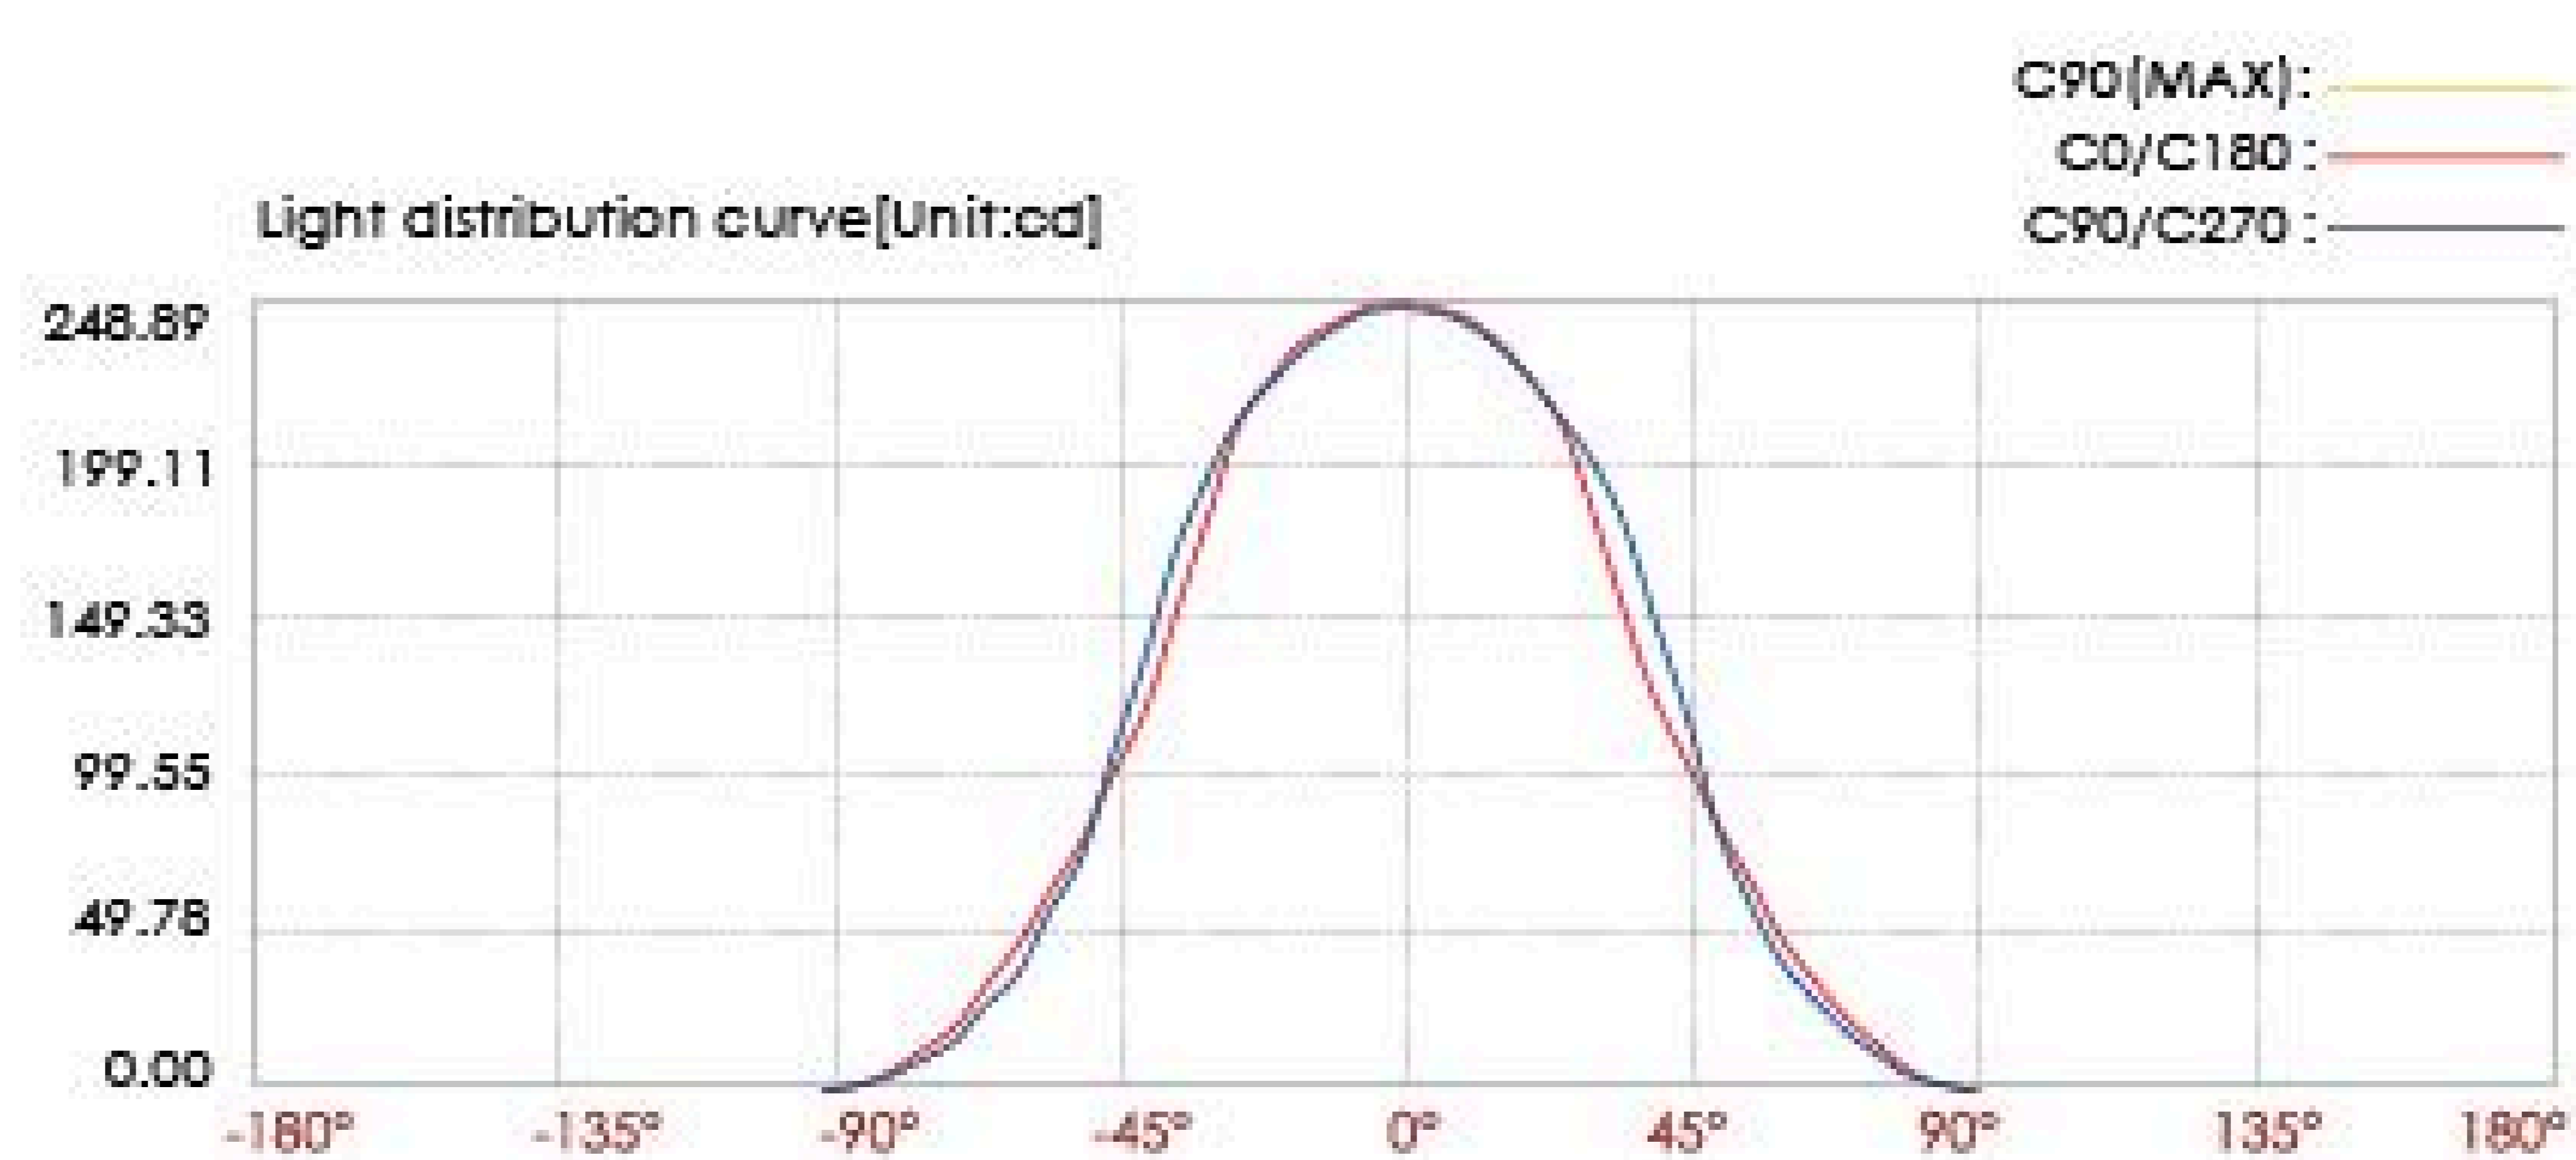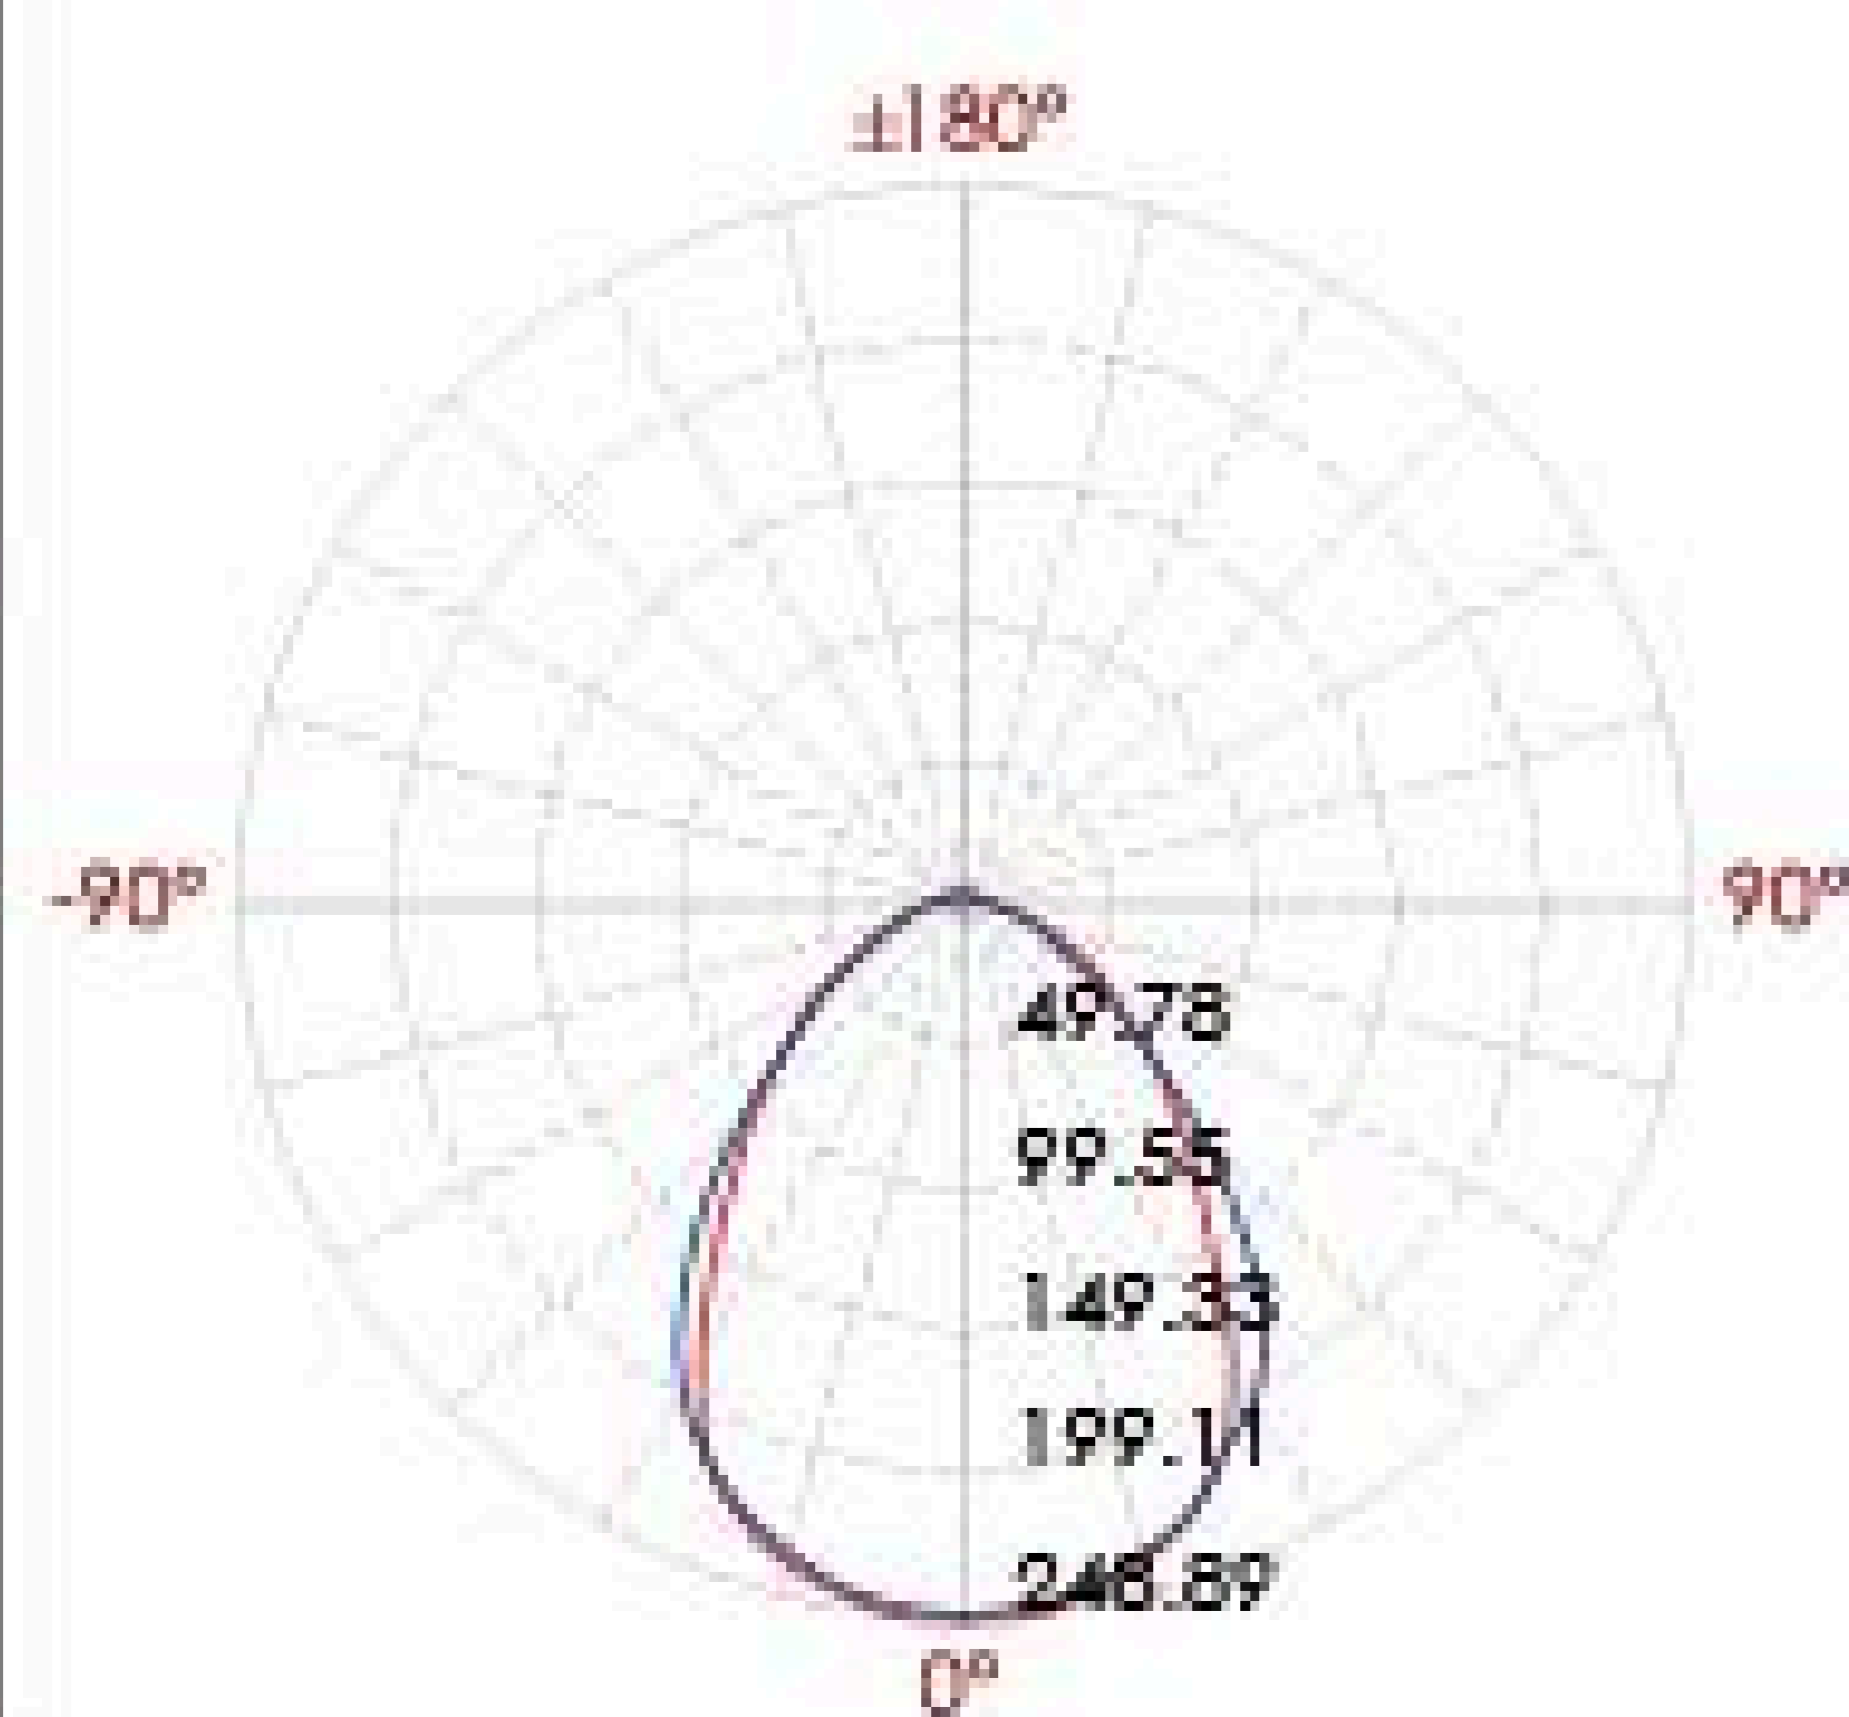

Lux distance curve

| | Illuminance at a distance | |
|-----|---------------------------|----------------|
| | Center beam LUX | Beam width V H |
| 2m | 62.22 LUX | 3.3m 3.7m |
| 4m | 15.56 LUX | 6.6m 7.4m |
| 6m | 6.91 LUX | 9.9m 11.1m |
| 8m | 3.89 LUX | 13.3m 14.9m |
| 10m | 2.49 LUX | 16.6m 18.6m |
| 12m | 1.73 LUX | 19.9m 22.3m |

Ver.Spread:79.3 Horiz.Spread:85.8