


07GRB1256 (TWO SIDE)

Light Source	12x1W
Selected Degree (°)θ1/2	40°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=540 240V=60
Consumption (W)	24V=13 240V=13.6
Luminance (LM)	WW=600x2
IK	07

Linear Drawing

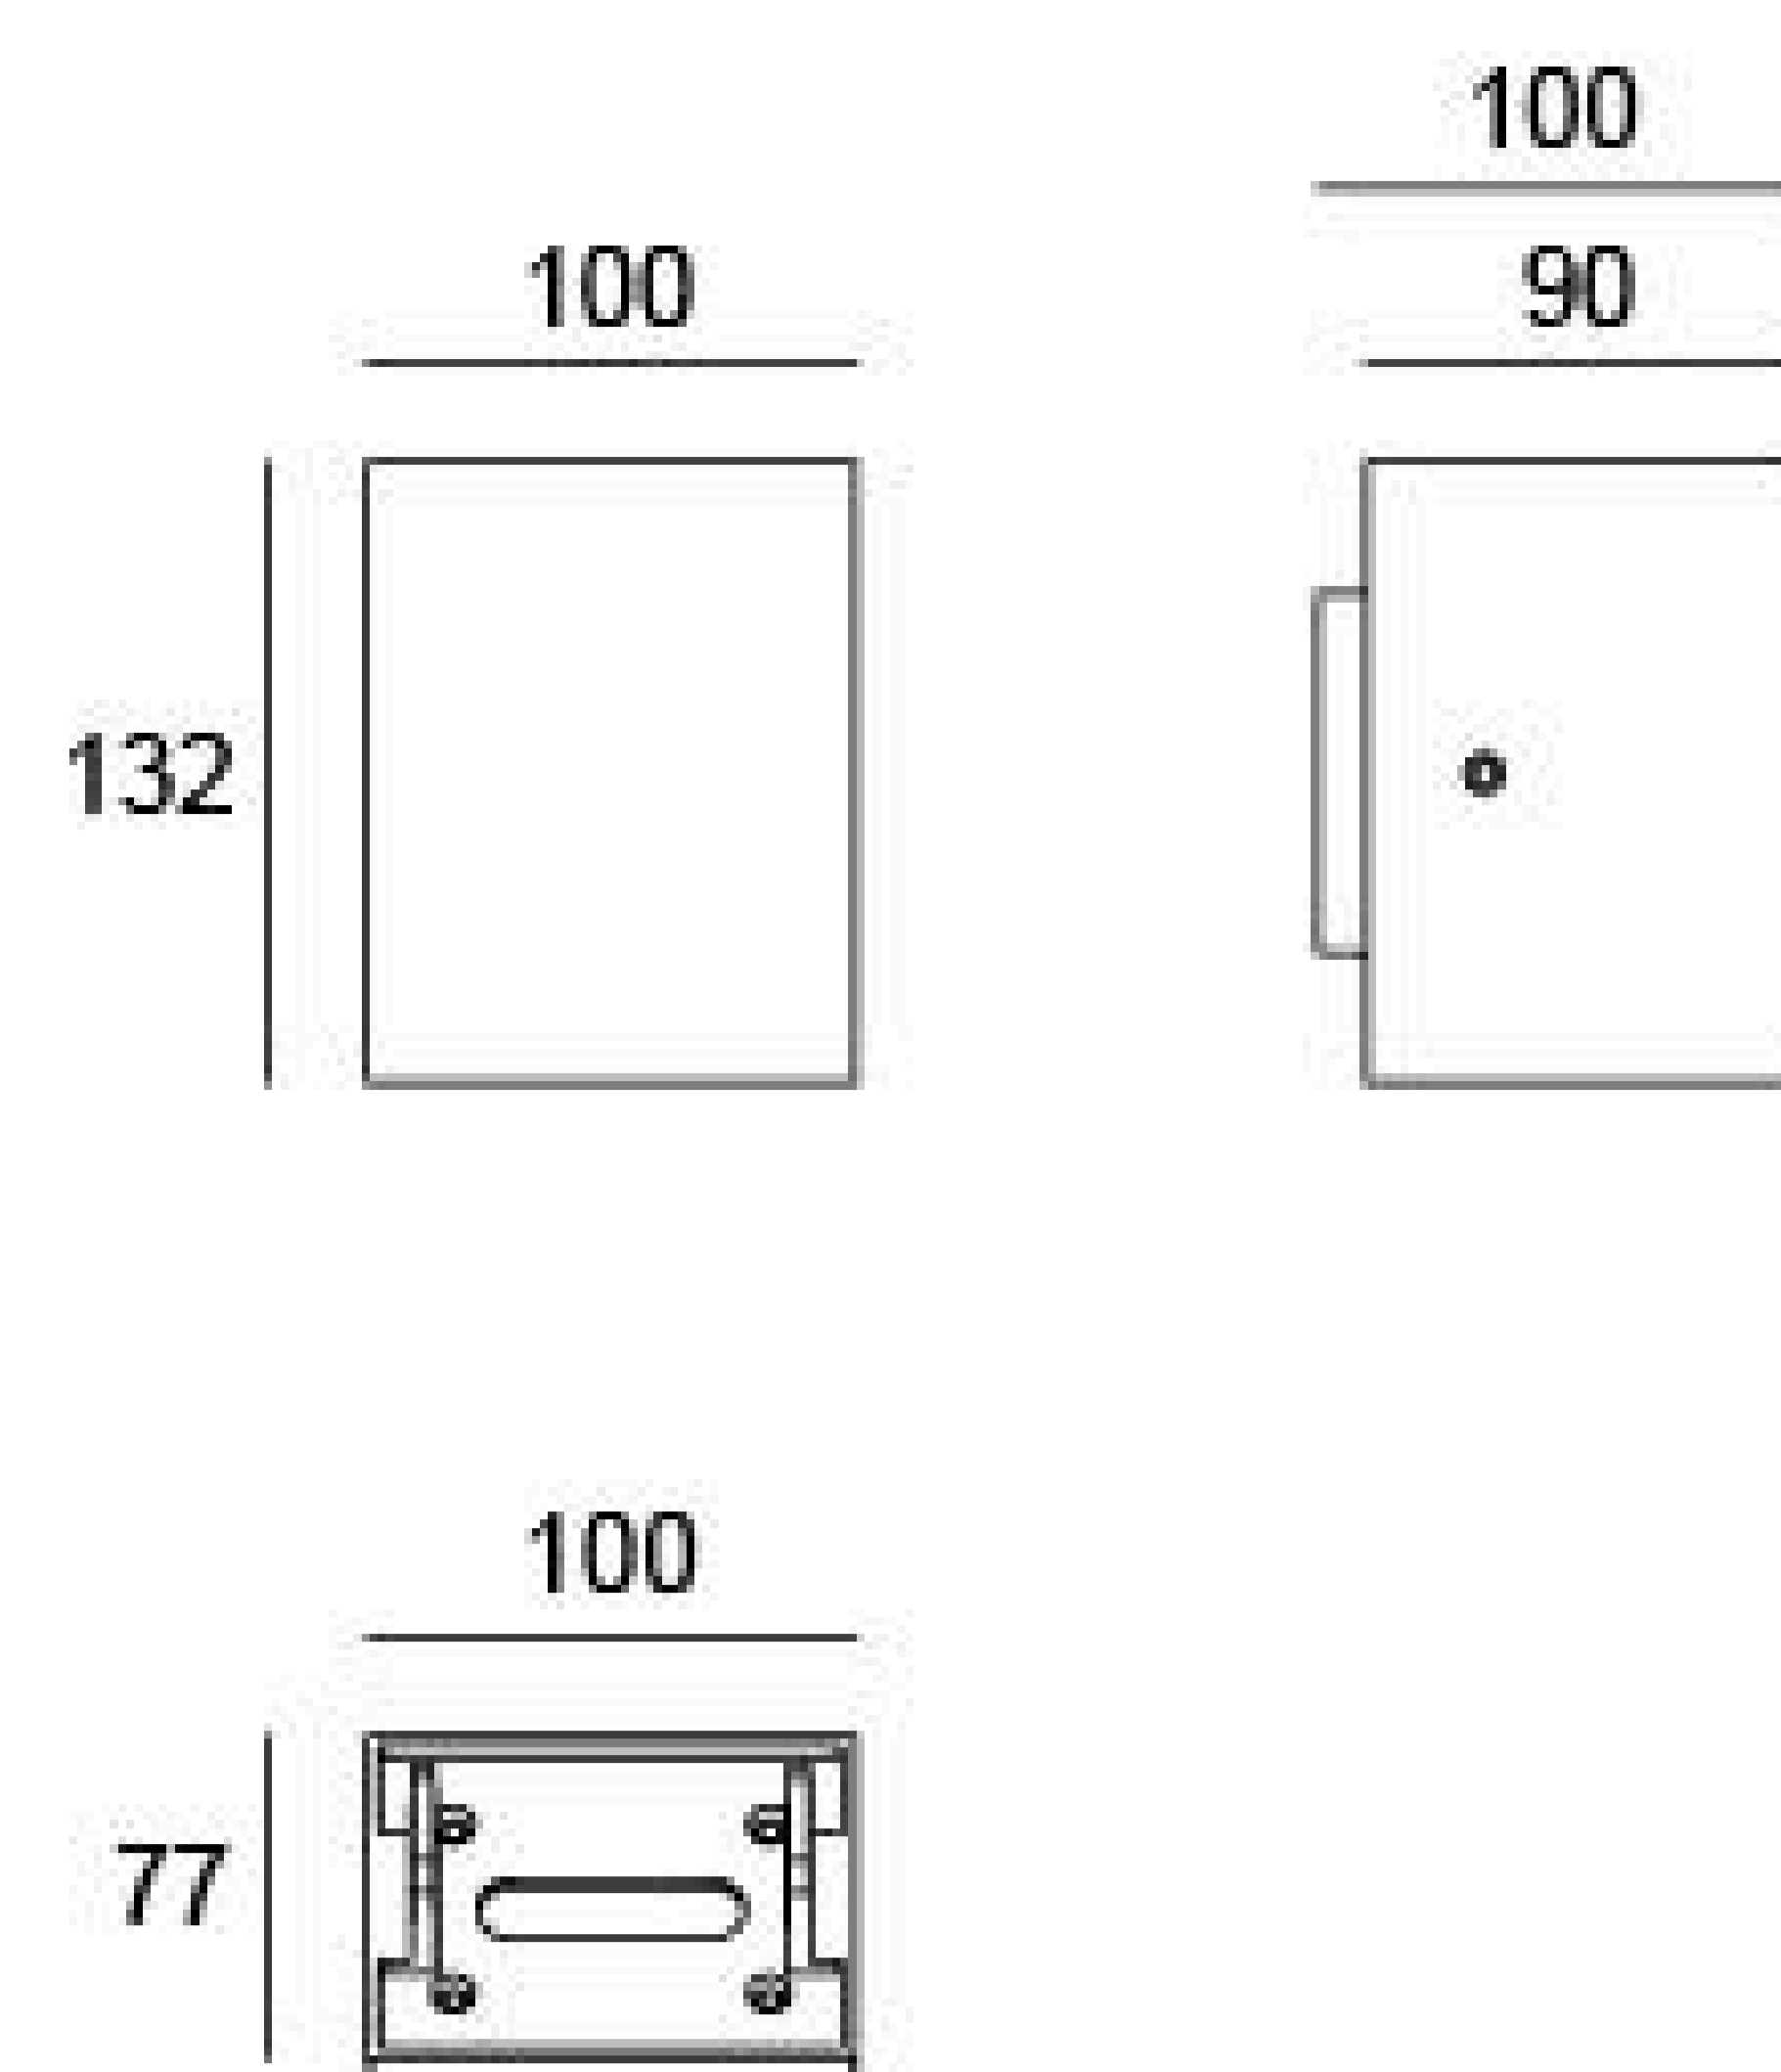


Unit: mm

Specification

Housing	12# Die-casting aluminum powder Painting. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	UVstop & Fireproof PC T=3mm
Gasket	Waterproof silicone gasket
LED Type	SMD
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

LENS (Item Code)

Referenced Degree(°)θ1/2

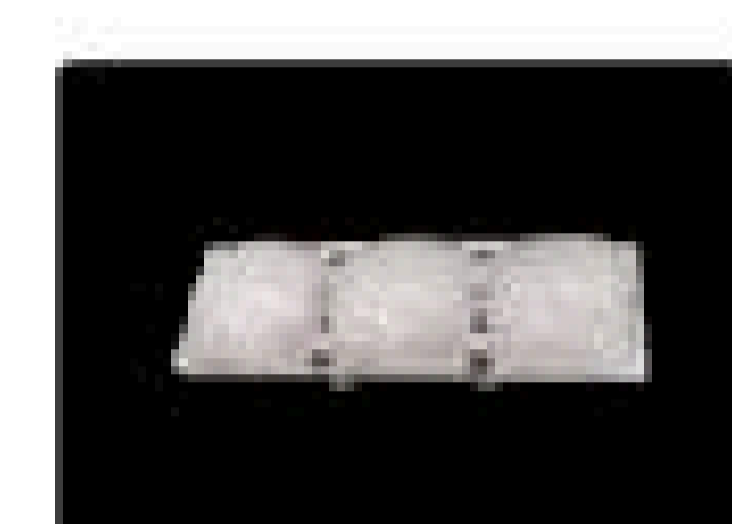

B116

40°

Painting Color

Primary	
	Sanded Dark Grey KAP 7037
Secondary	
	Sanded Black RAL 9005
	Sanded Bronze KAP 7008
	Sanded White RAL 9003




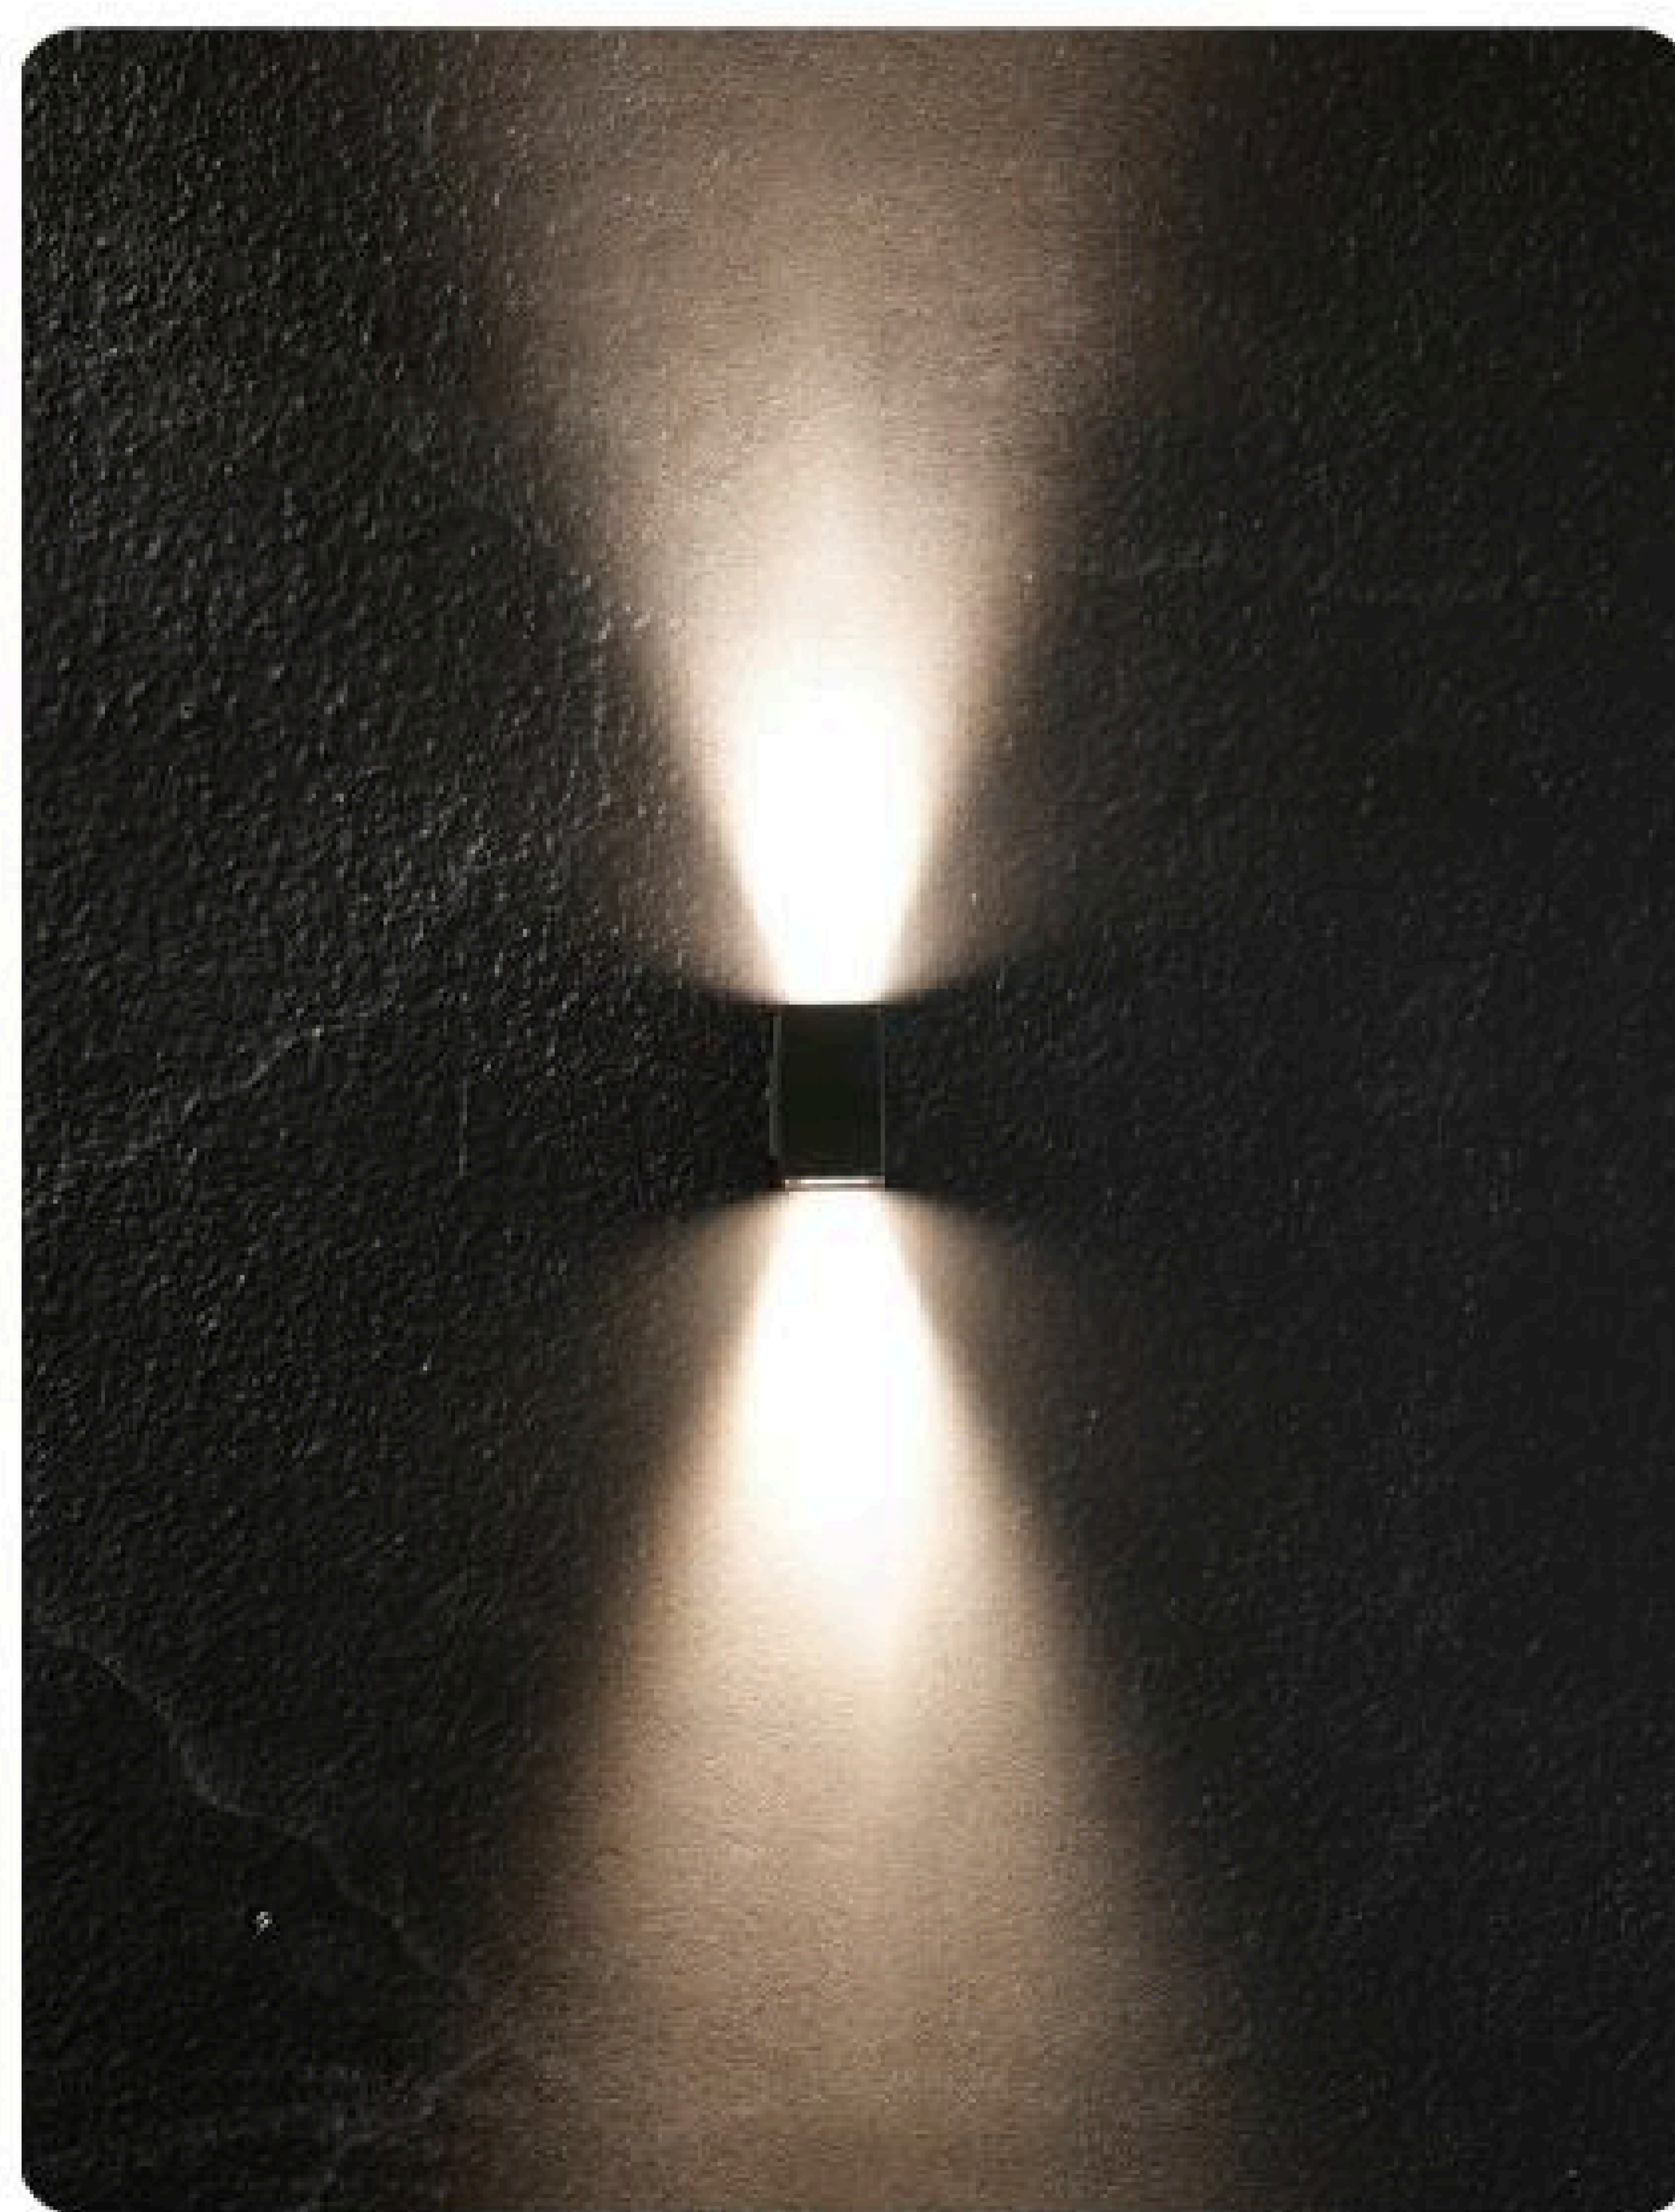


Diagram of Instruction

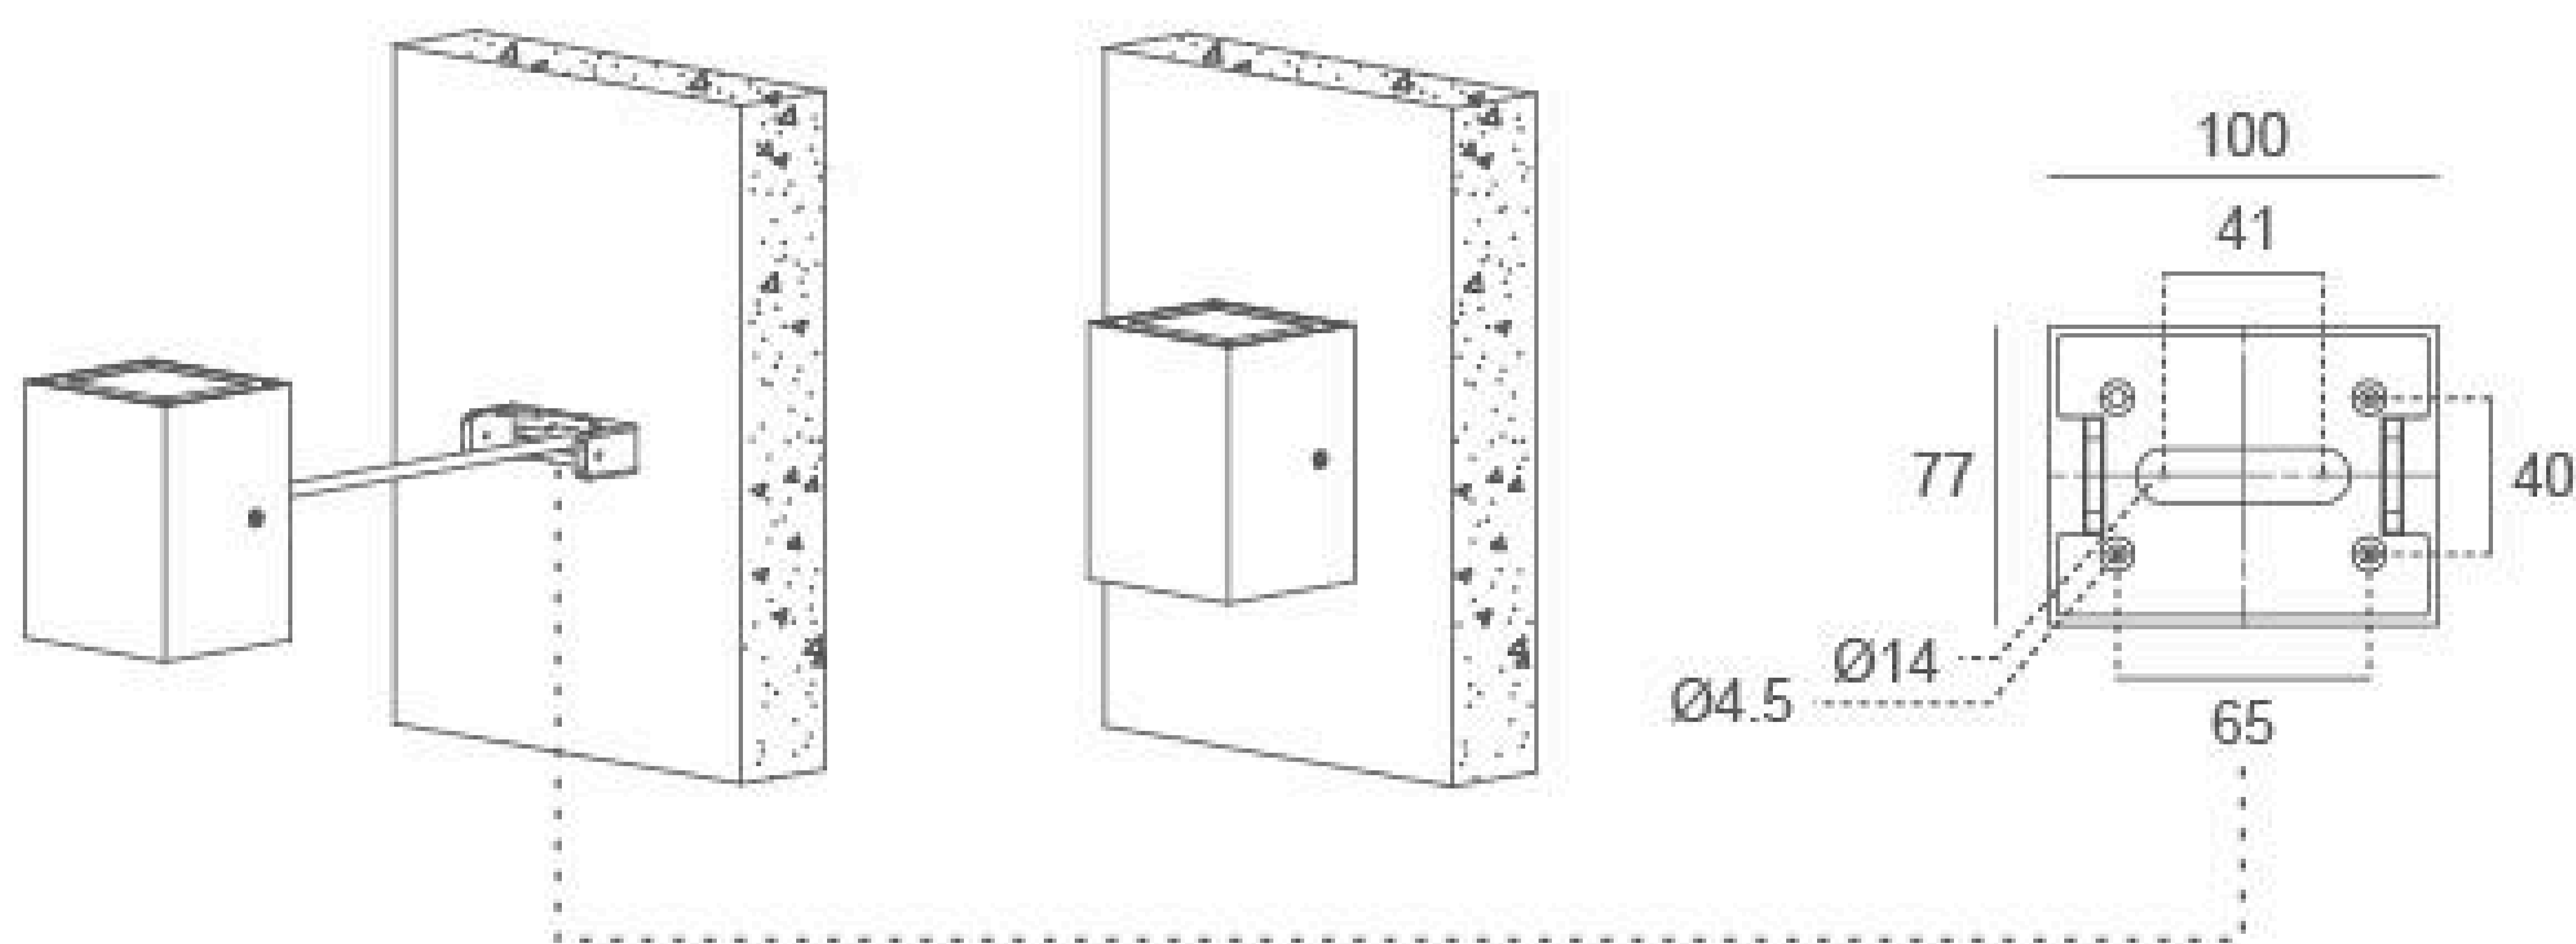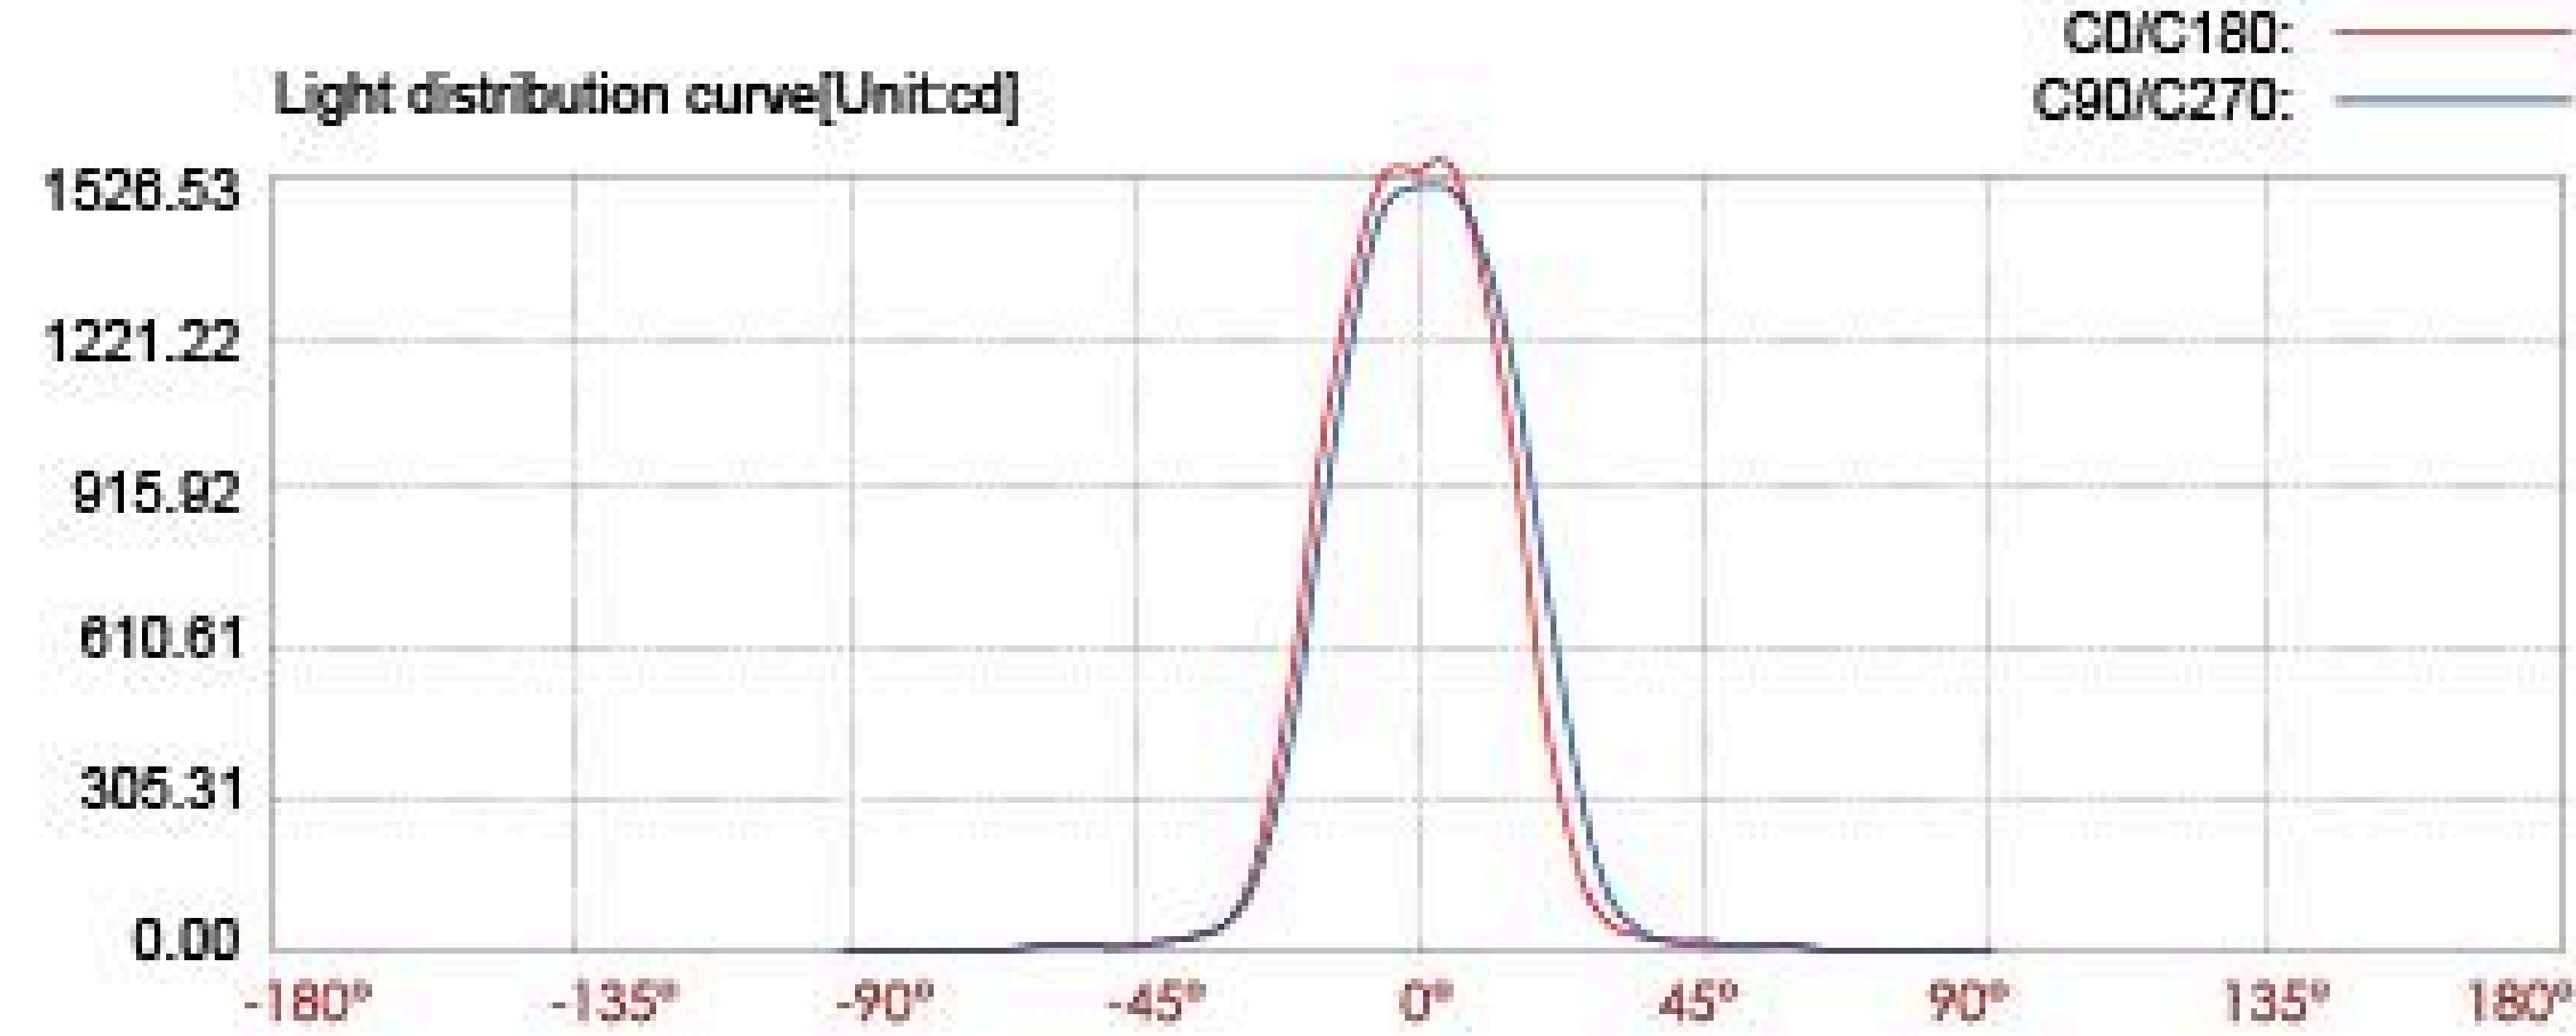

Photometric

12m	10.53 LUX
11m	
10m	15.16 LUX
9m	
8m	23.69 LUX
7m	
6m	42.11 LUX
5m	
4m	94.76 LUX
3m	
2m	379.03 LUX
1m	

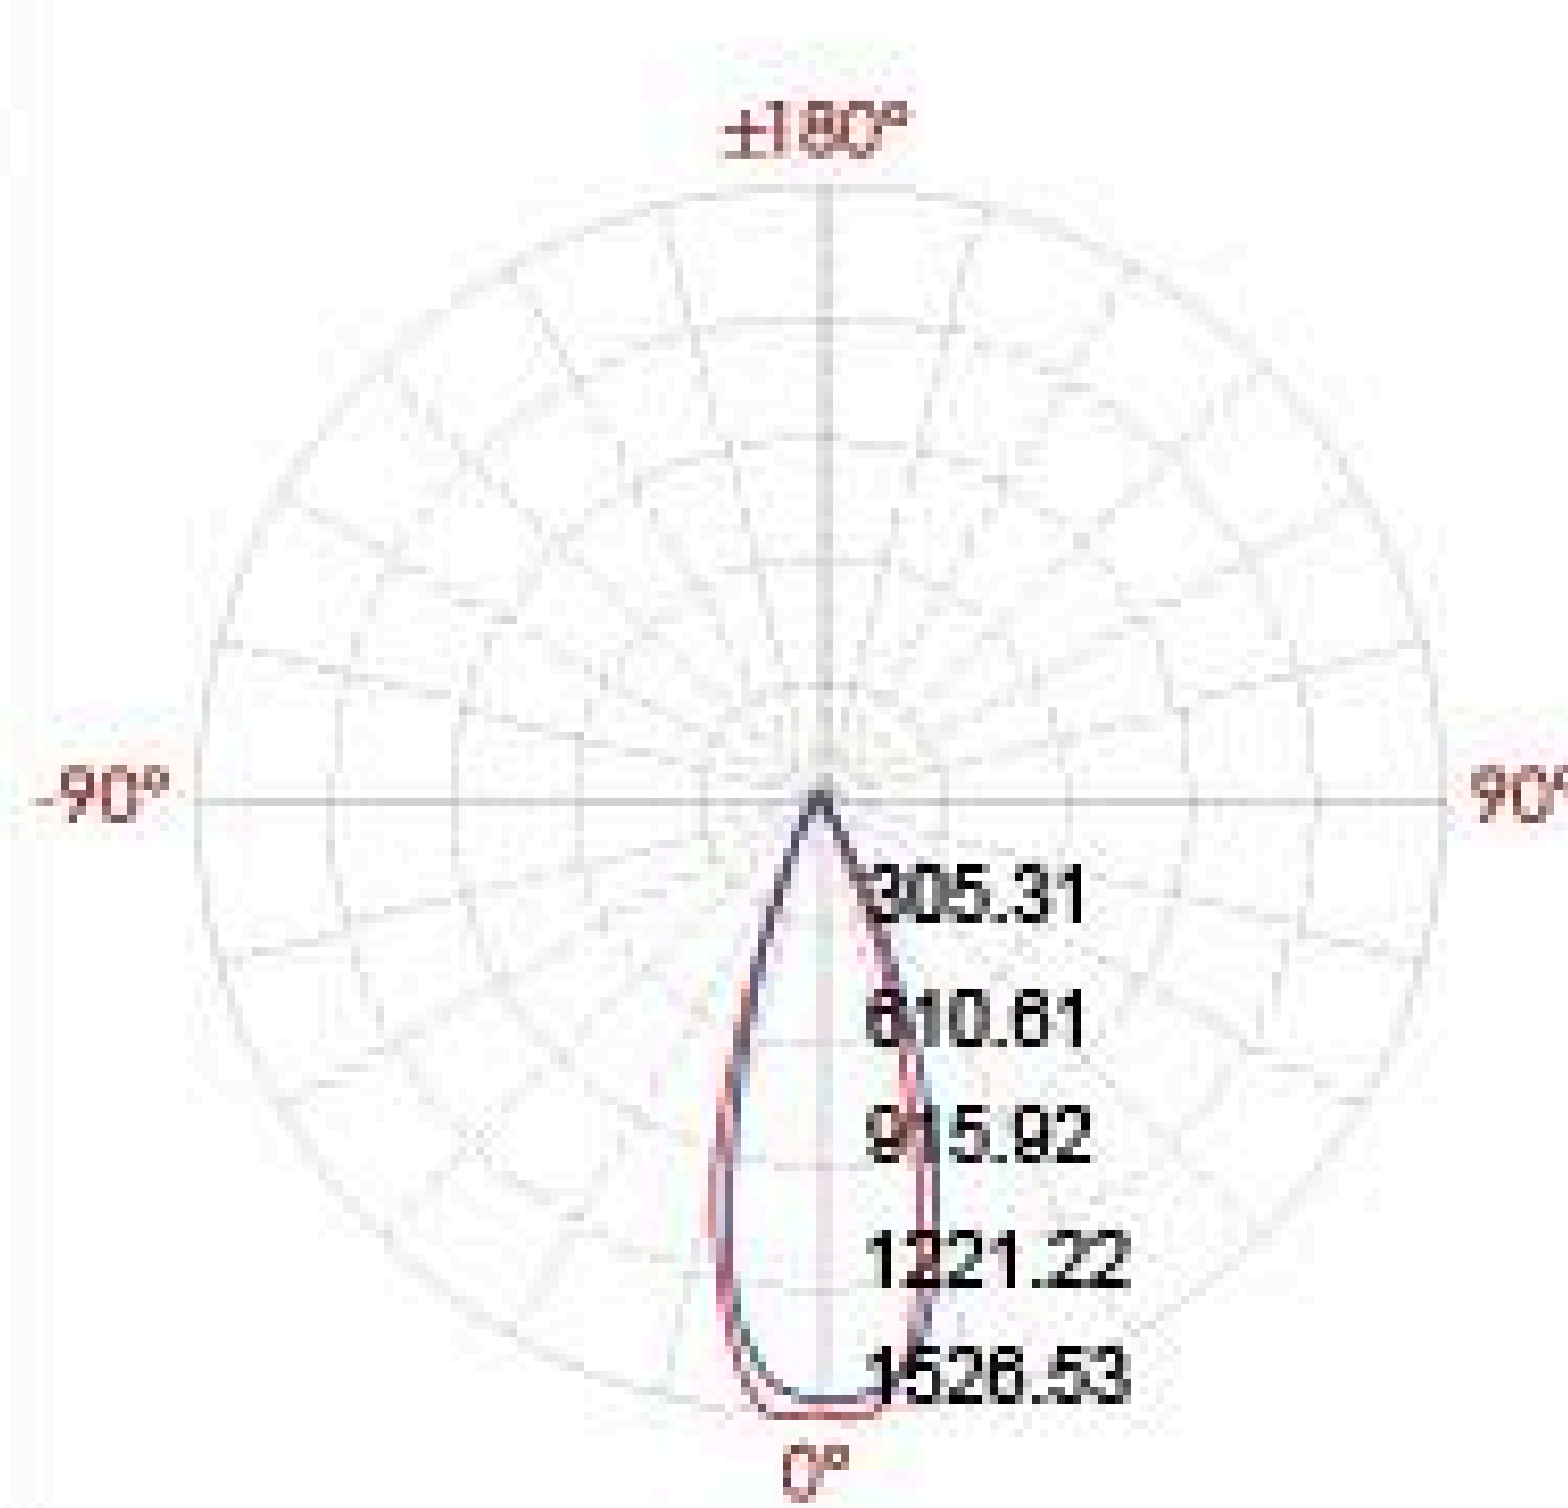

Center beam LUX	Beam width	
	V	H
379.03 LUX	1.2m	1.2m
94.76 LUX	2.5m	2.5m
42.11 LUX	3.7m	3.7m
23.69 LUX	4.9m	5.0m
15.16 LUX	6.1m	6.2m
10.53 LUX	7.4m	7.5m

Ver.Spread:34.2 Horiz.Spread:34.6