


07GRD0226 (TWO SIDE)

Light Source	2x6W
Lens	N/A
Selected Degree (°)θ1/2	60°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=540 240V=66
Consumption (W)	24V=13 240V=14.5
Luminance (LM)	WW=580x2
IK	08


Specification

Housing	12# Die-casting aluminum powder painting. T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & Fireproof PC T=6mm
Driver	Built in on/off driver
LED Type	COB
Gasket	Waterproof silicone gasket
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.3m 240V: H05RN-F 3×1.0mm ² , L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Diagram of Instruction

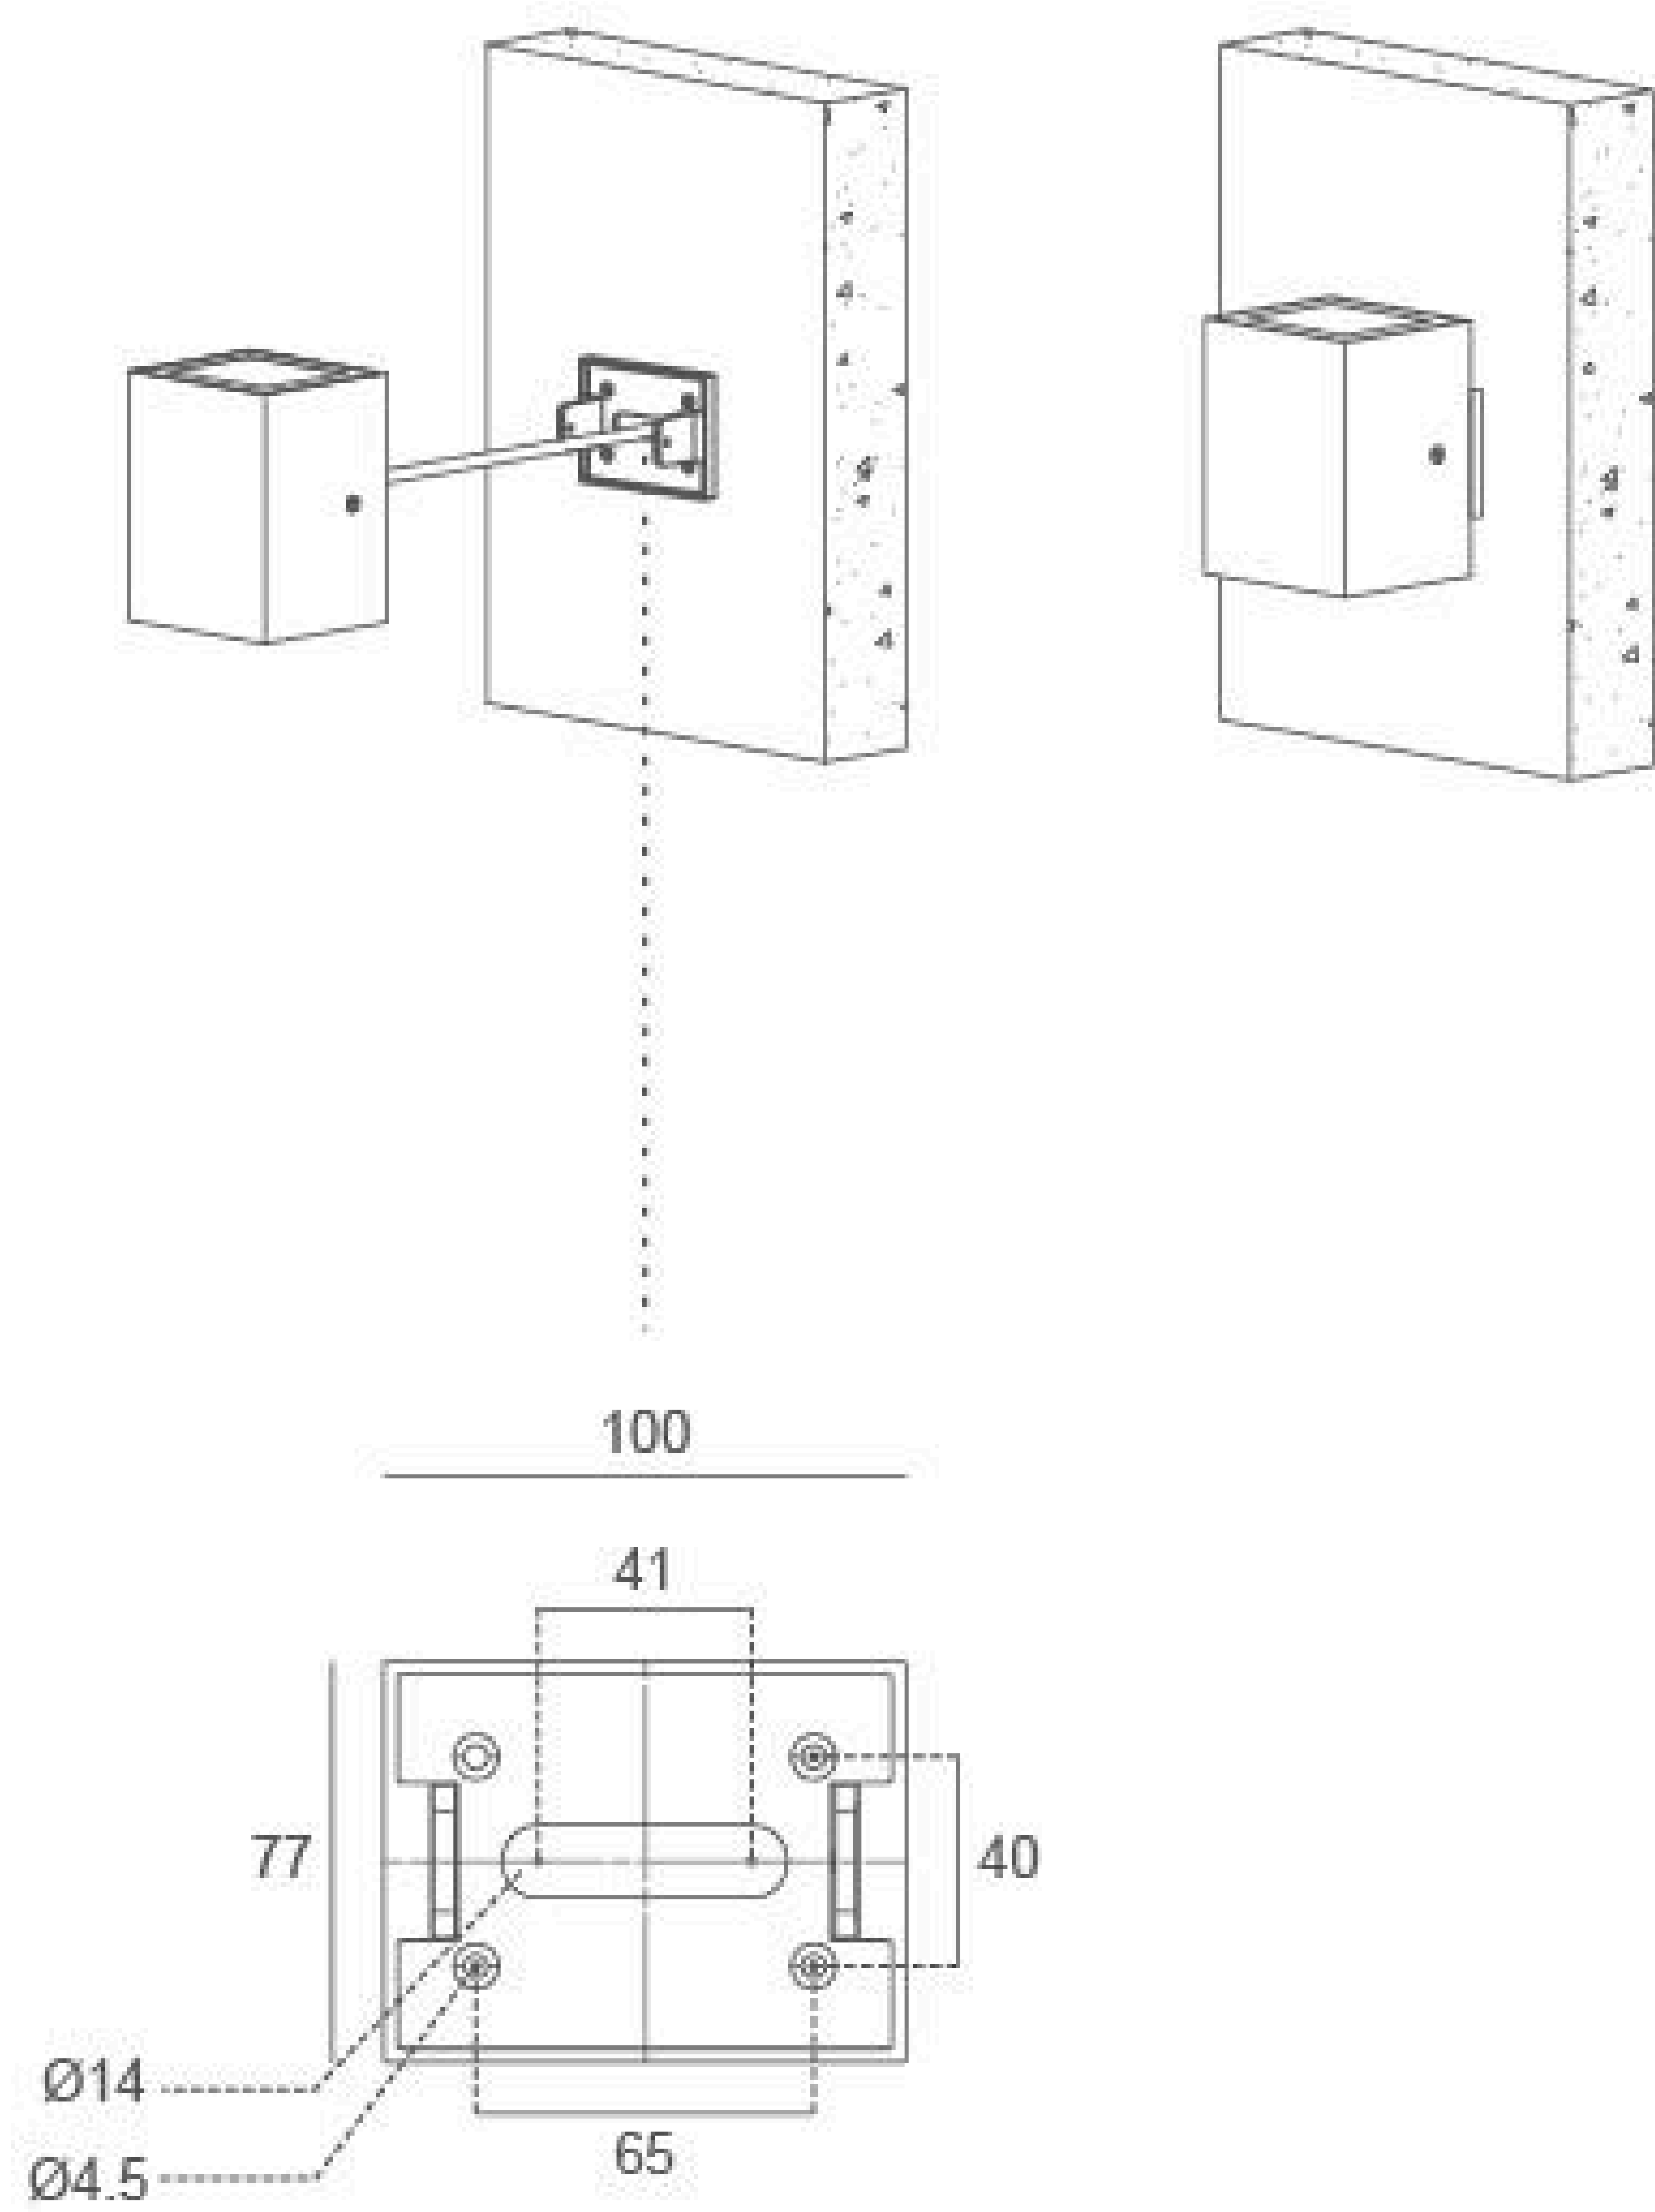

Linear Drawing

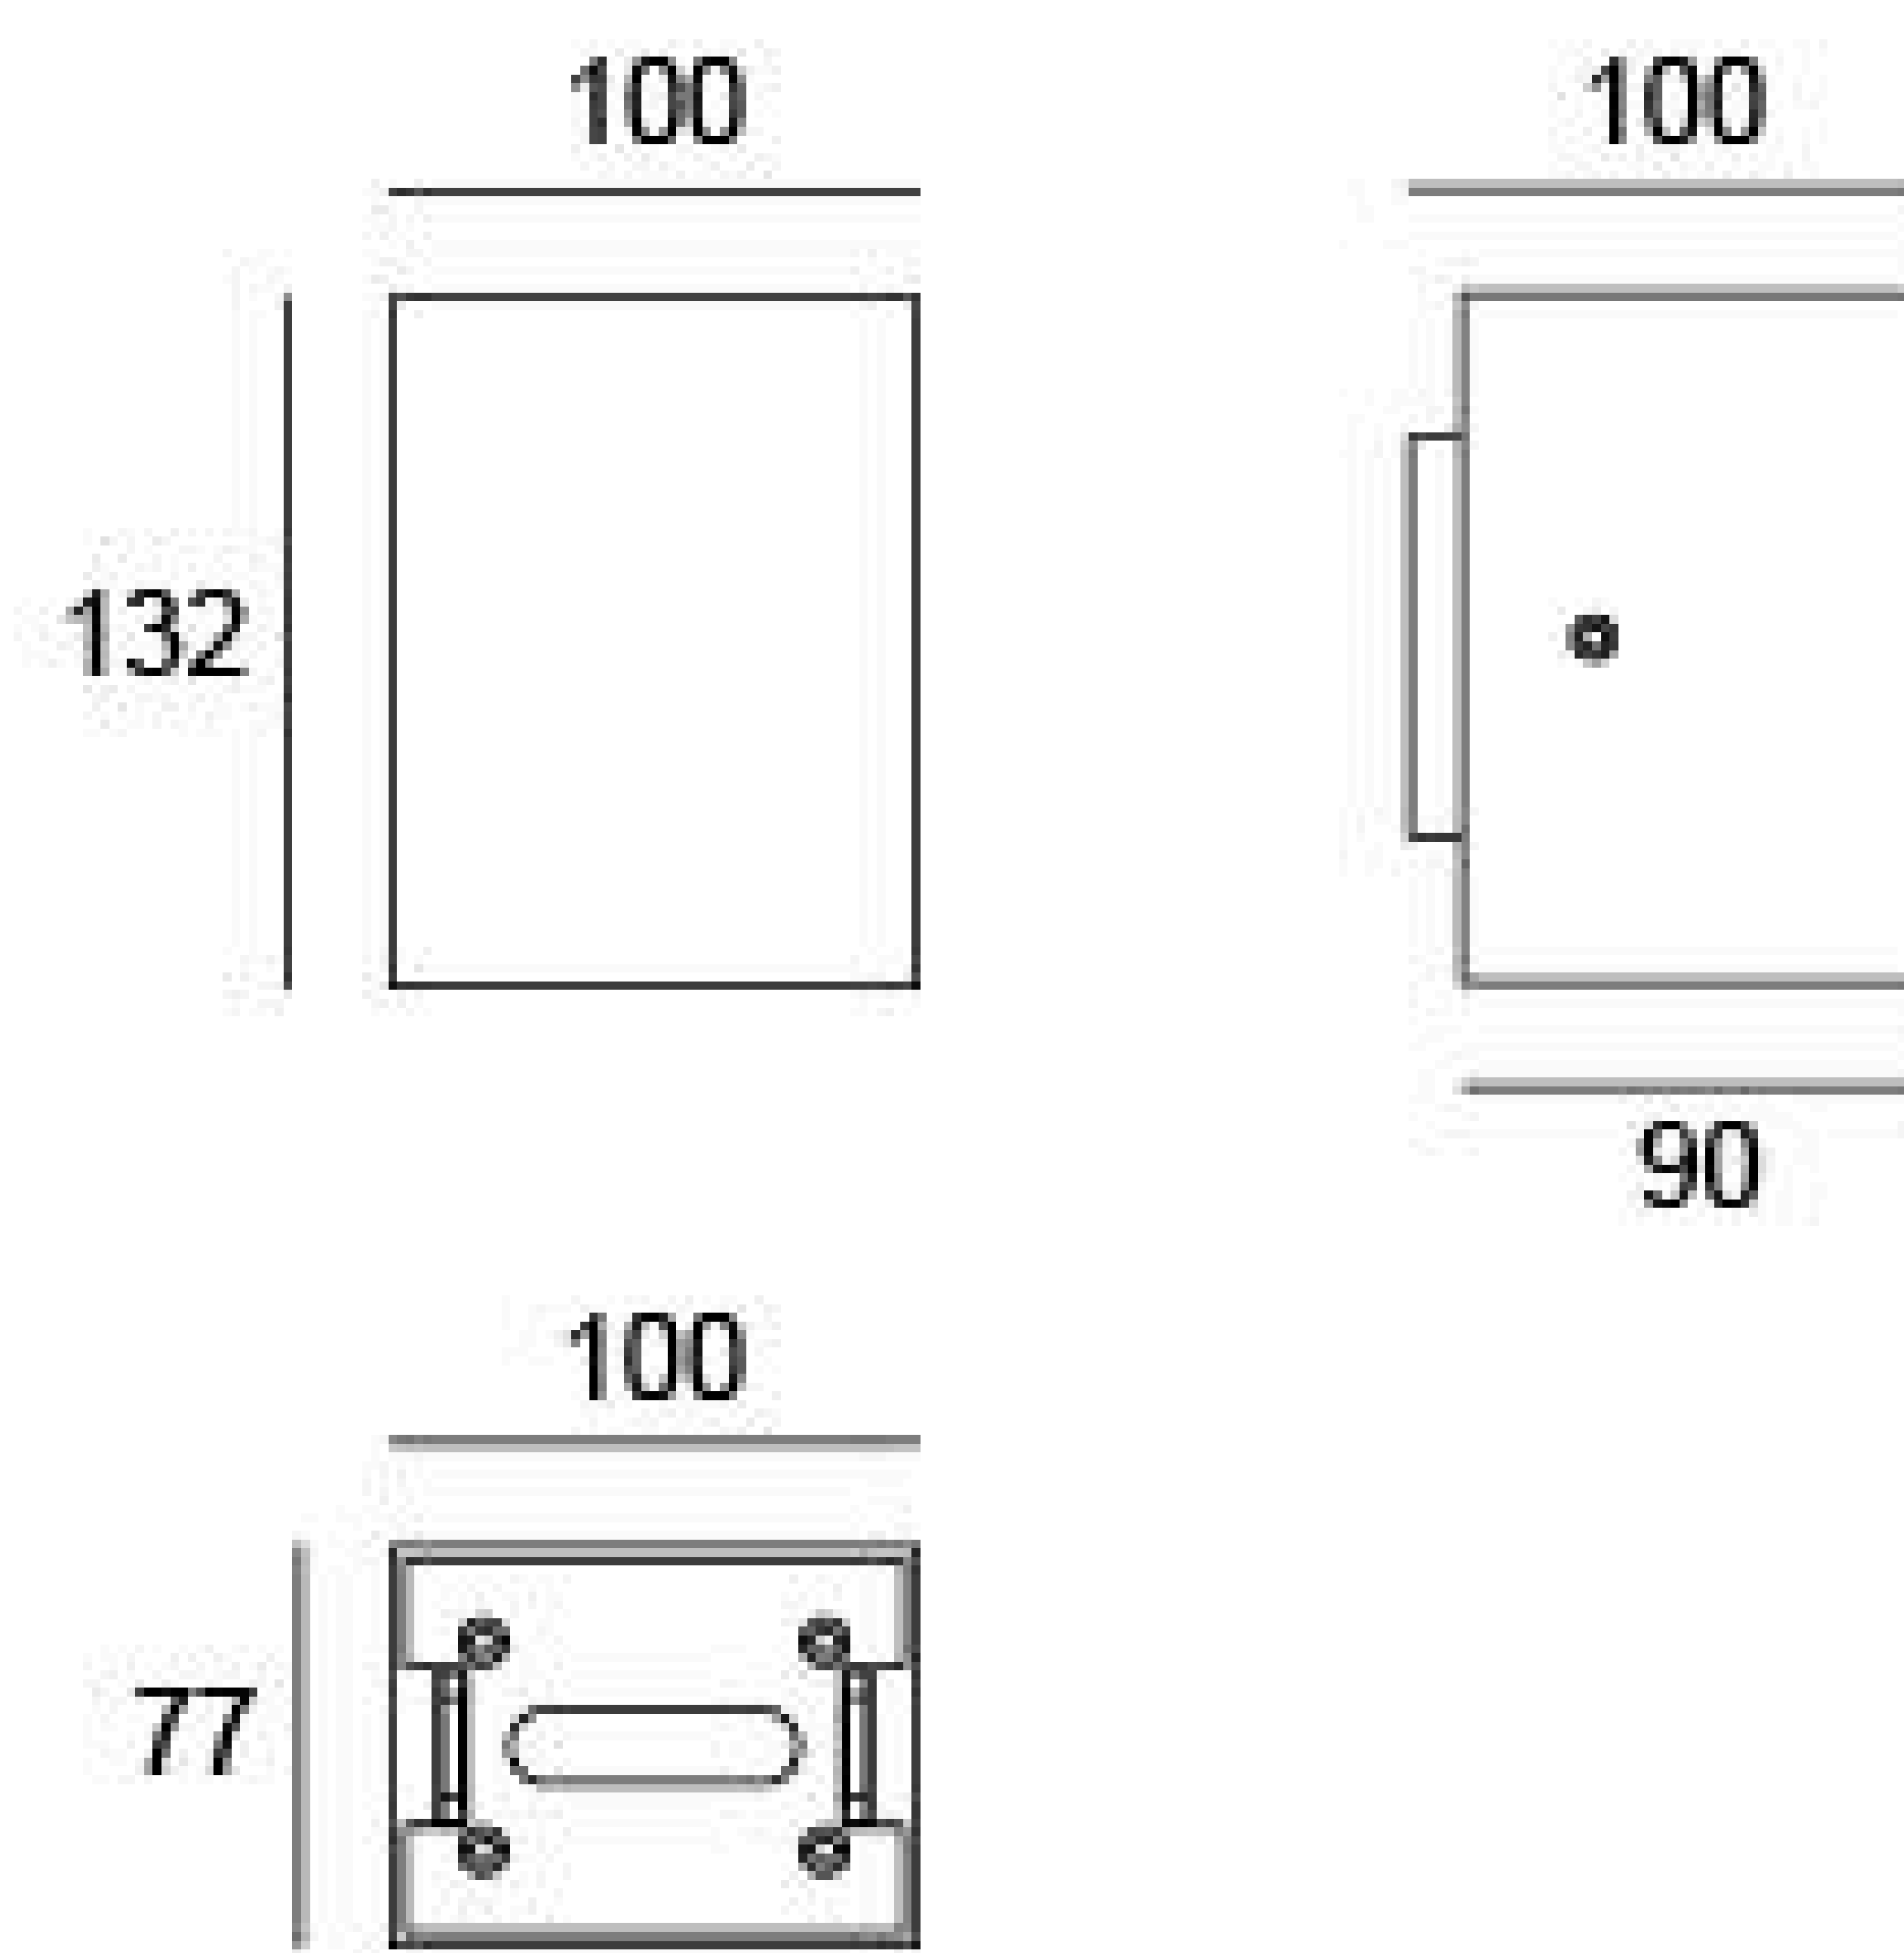

Unit: mm

Painting Color

Primary




Sanded Dark Grey
KAP 7037

Secondary



Sanded Black
RAL 9005

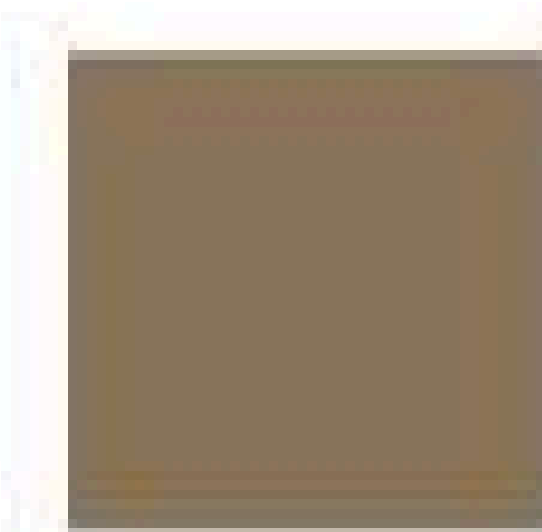

Sanded Bronze
KAP 7008





Sanded White
RAL 9003



Photometric

12m	1.09 LUX
11m	
10m	1.56 LUX
9m	
8m	2.44 LUX
7m	
6m	4.34 LUX
4m	9.77 LUX
2m	39.09 LUX
1m	

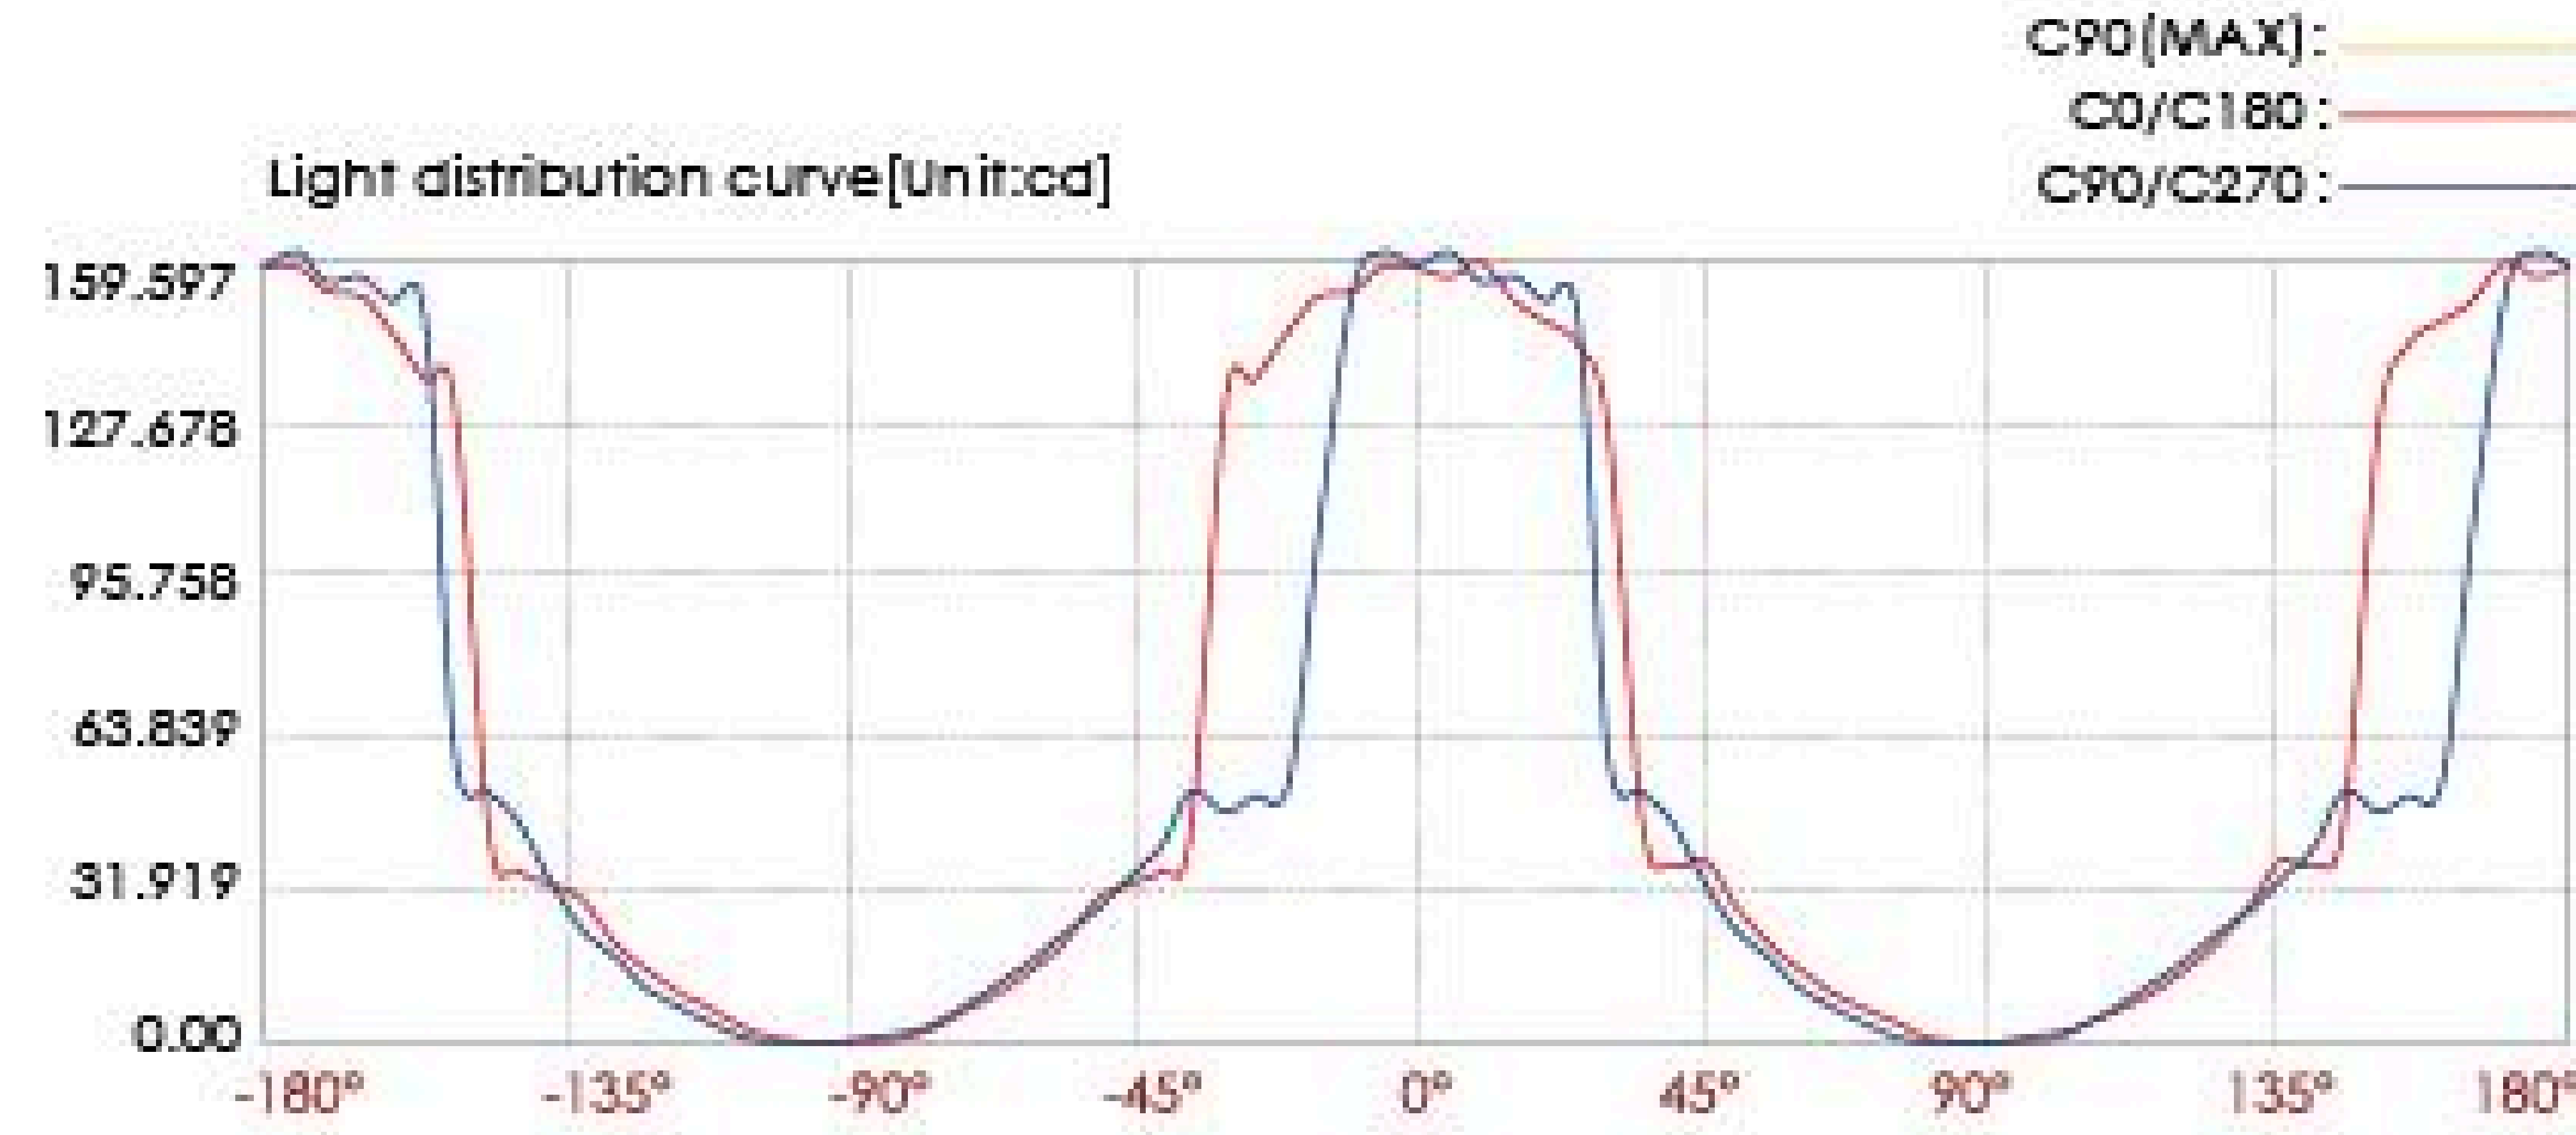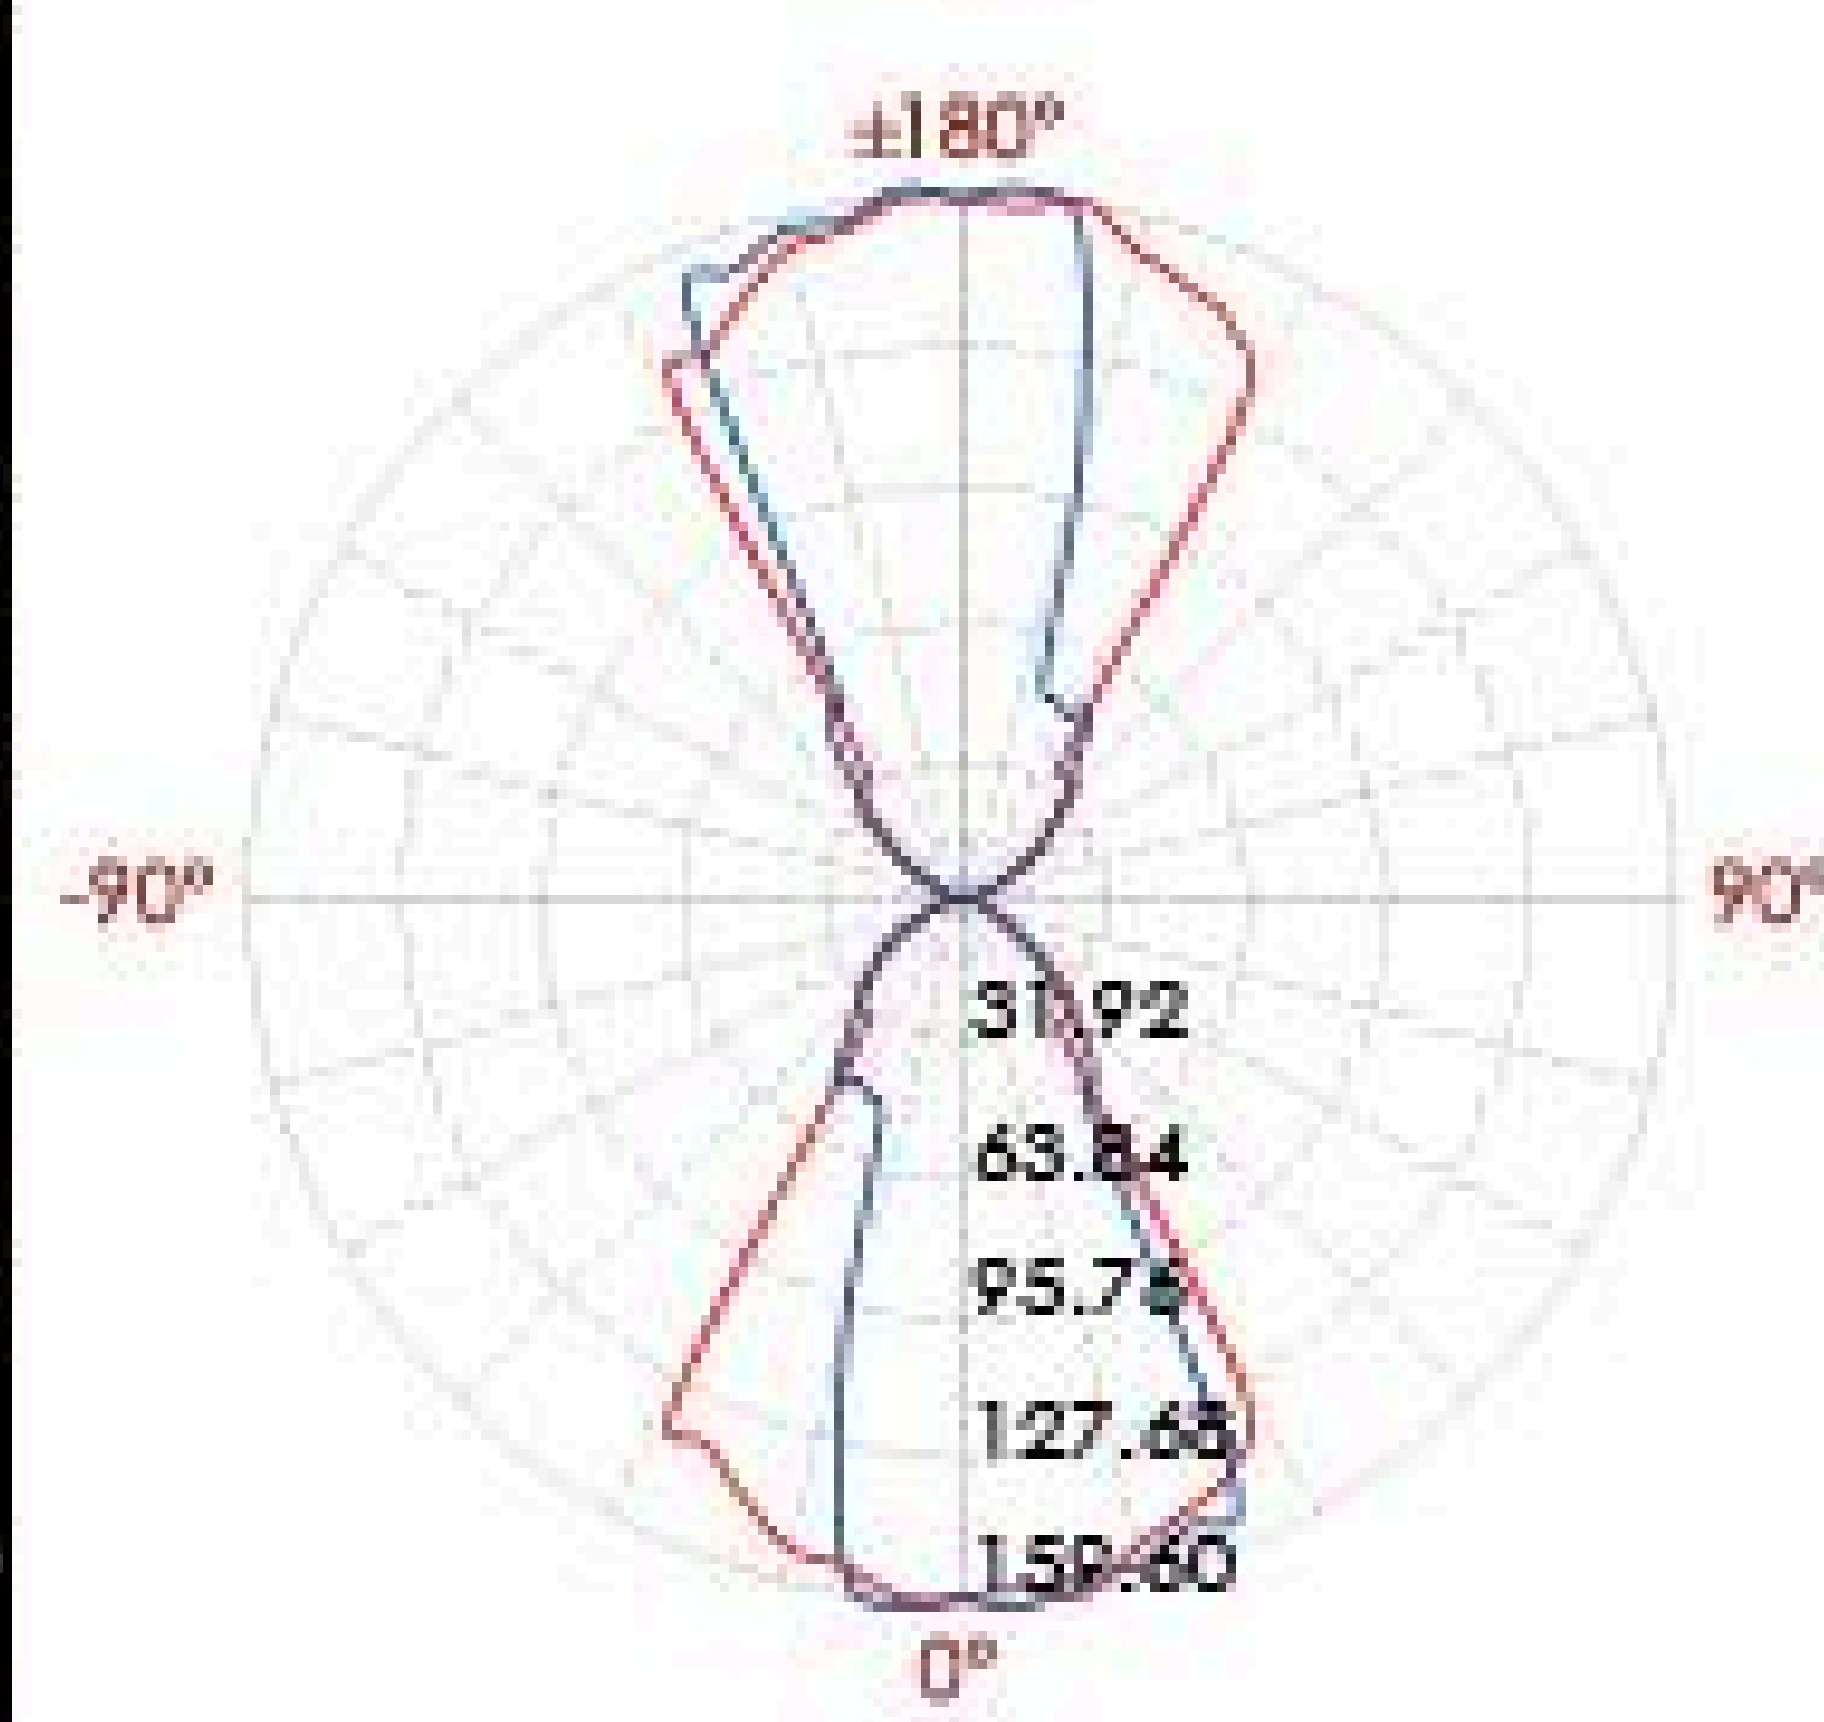

Lux distance curve

Center beam LUX	Illuminance at a distance	
	Beam width V	Beam width H
2m	2.6m	1.7m
4m	5.2m	3.4m
6m	7.8m	5.1m
8m	10.3m	6.8m
10m	12.9m	8.5m
12m	15.5m	10.3m

Ver.3pread:65.8 Horiz.3pread:46.3