07GRR0226 (TWO SIDE)

Light Source	2x6W
Selected Degree (°)θ1/2	25°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=540 240V=66
Consumption (W)	24V=13 240V=14.5
Luminance (LM)	WW=580x2
IK	08

Linear Drawing

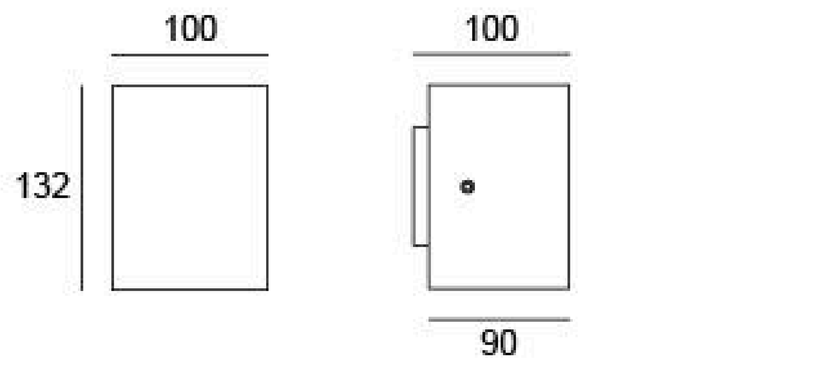

Unit: mm

Specification

Housing	12# Die-casting aluminum powder painting. T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Light Window	UV stop & Fireproof PC T=3mm
Gasket	Waterproof silicone gasket
LED Type	COB
Driver	Built in on/off driver
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code) Referenced Degree(°)θ1/2

R5 18° 25° 40°

Painting Color

Primary

Sanded Dark Grey
KAP 7037

Secondary

Sanded Black
RAL 9005

Sanded Bronze
KAP 7008

Sanded White
RAL 9003

Diagram of Instruction

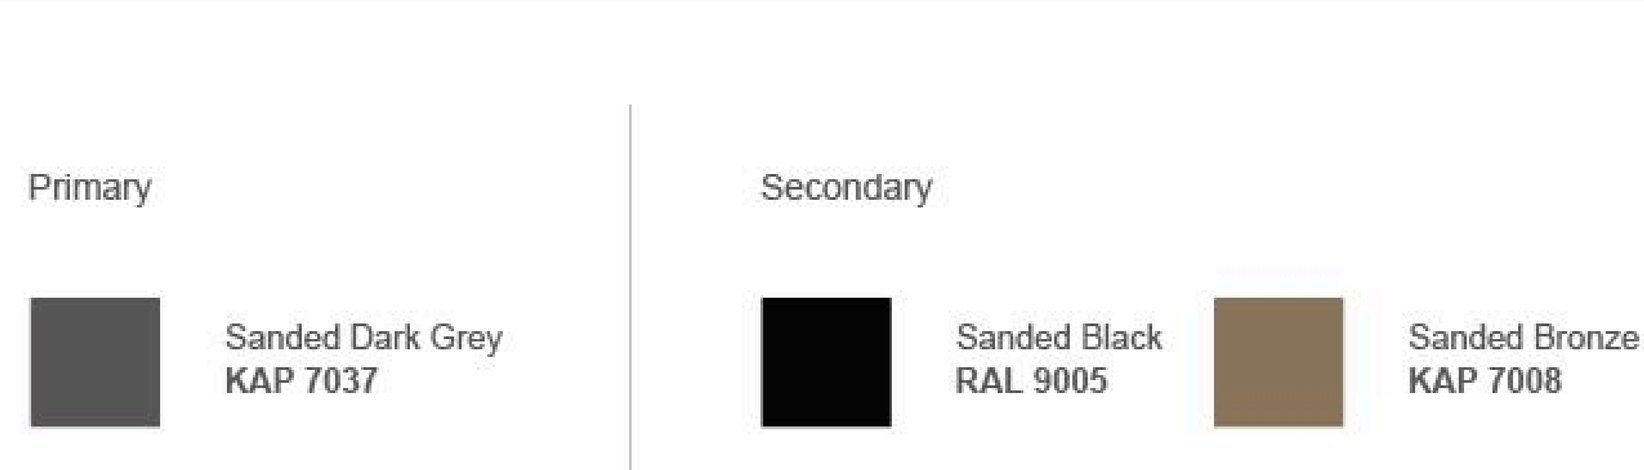

Photometirc

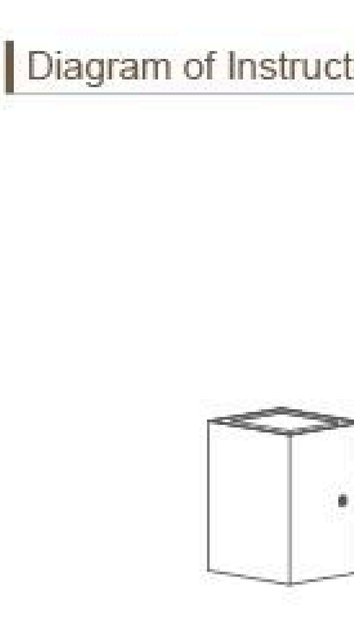

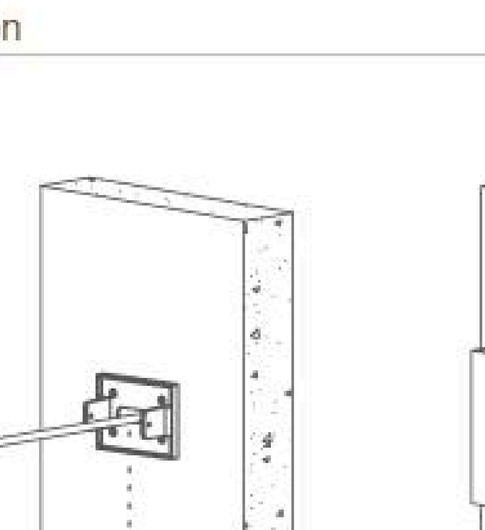

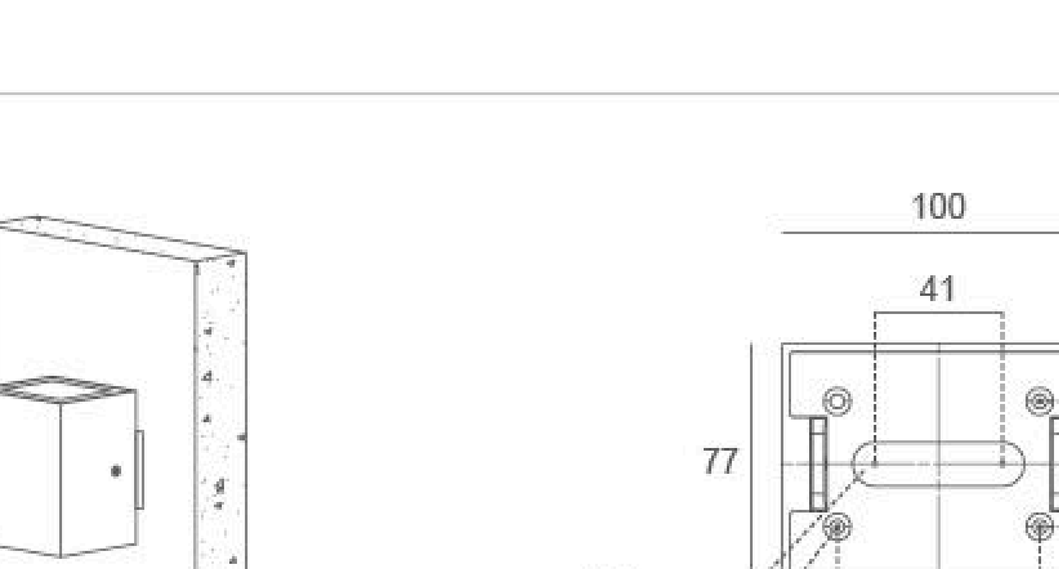

Lux distance curve

Center beam LUX		Beam width V	Beam width H
2m	256.04 LUX	0.9m	0.9m
4m	64.01 LUX	1.9m	1.9m
6m	28.45 LUX	2.8m	2.8m
8m	16.00 LUX	3.8m	3.8m
10m	10.24 LUX	4.7m	4.7m
12m	7.11 LUX	5.7m	5.6m

Illuminance at a distance

Ver.Spread:26.5 Horiz.Spread:26.4