


07HBE1ED1256 (ONE SIDE)

Light Source	12x1W
Selected Degree (°)θ1/2	95° x 65°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=612 240V=70
Consumption (W)	24V/240V=14.7
Luminance (LM)	WW=832
IK	04

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.3m 240V: H05RN-F 3×1.0mm ² , L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Linear Drawing

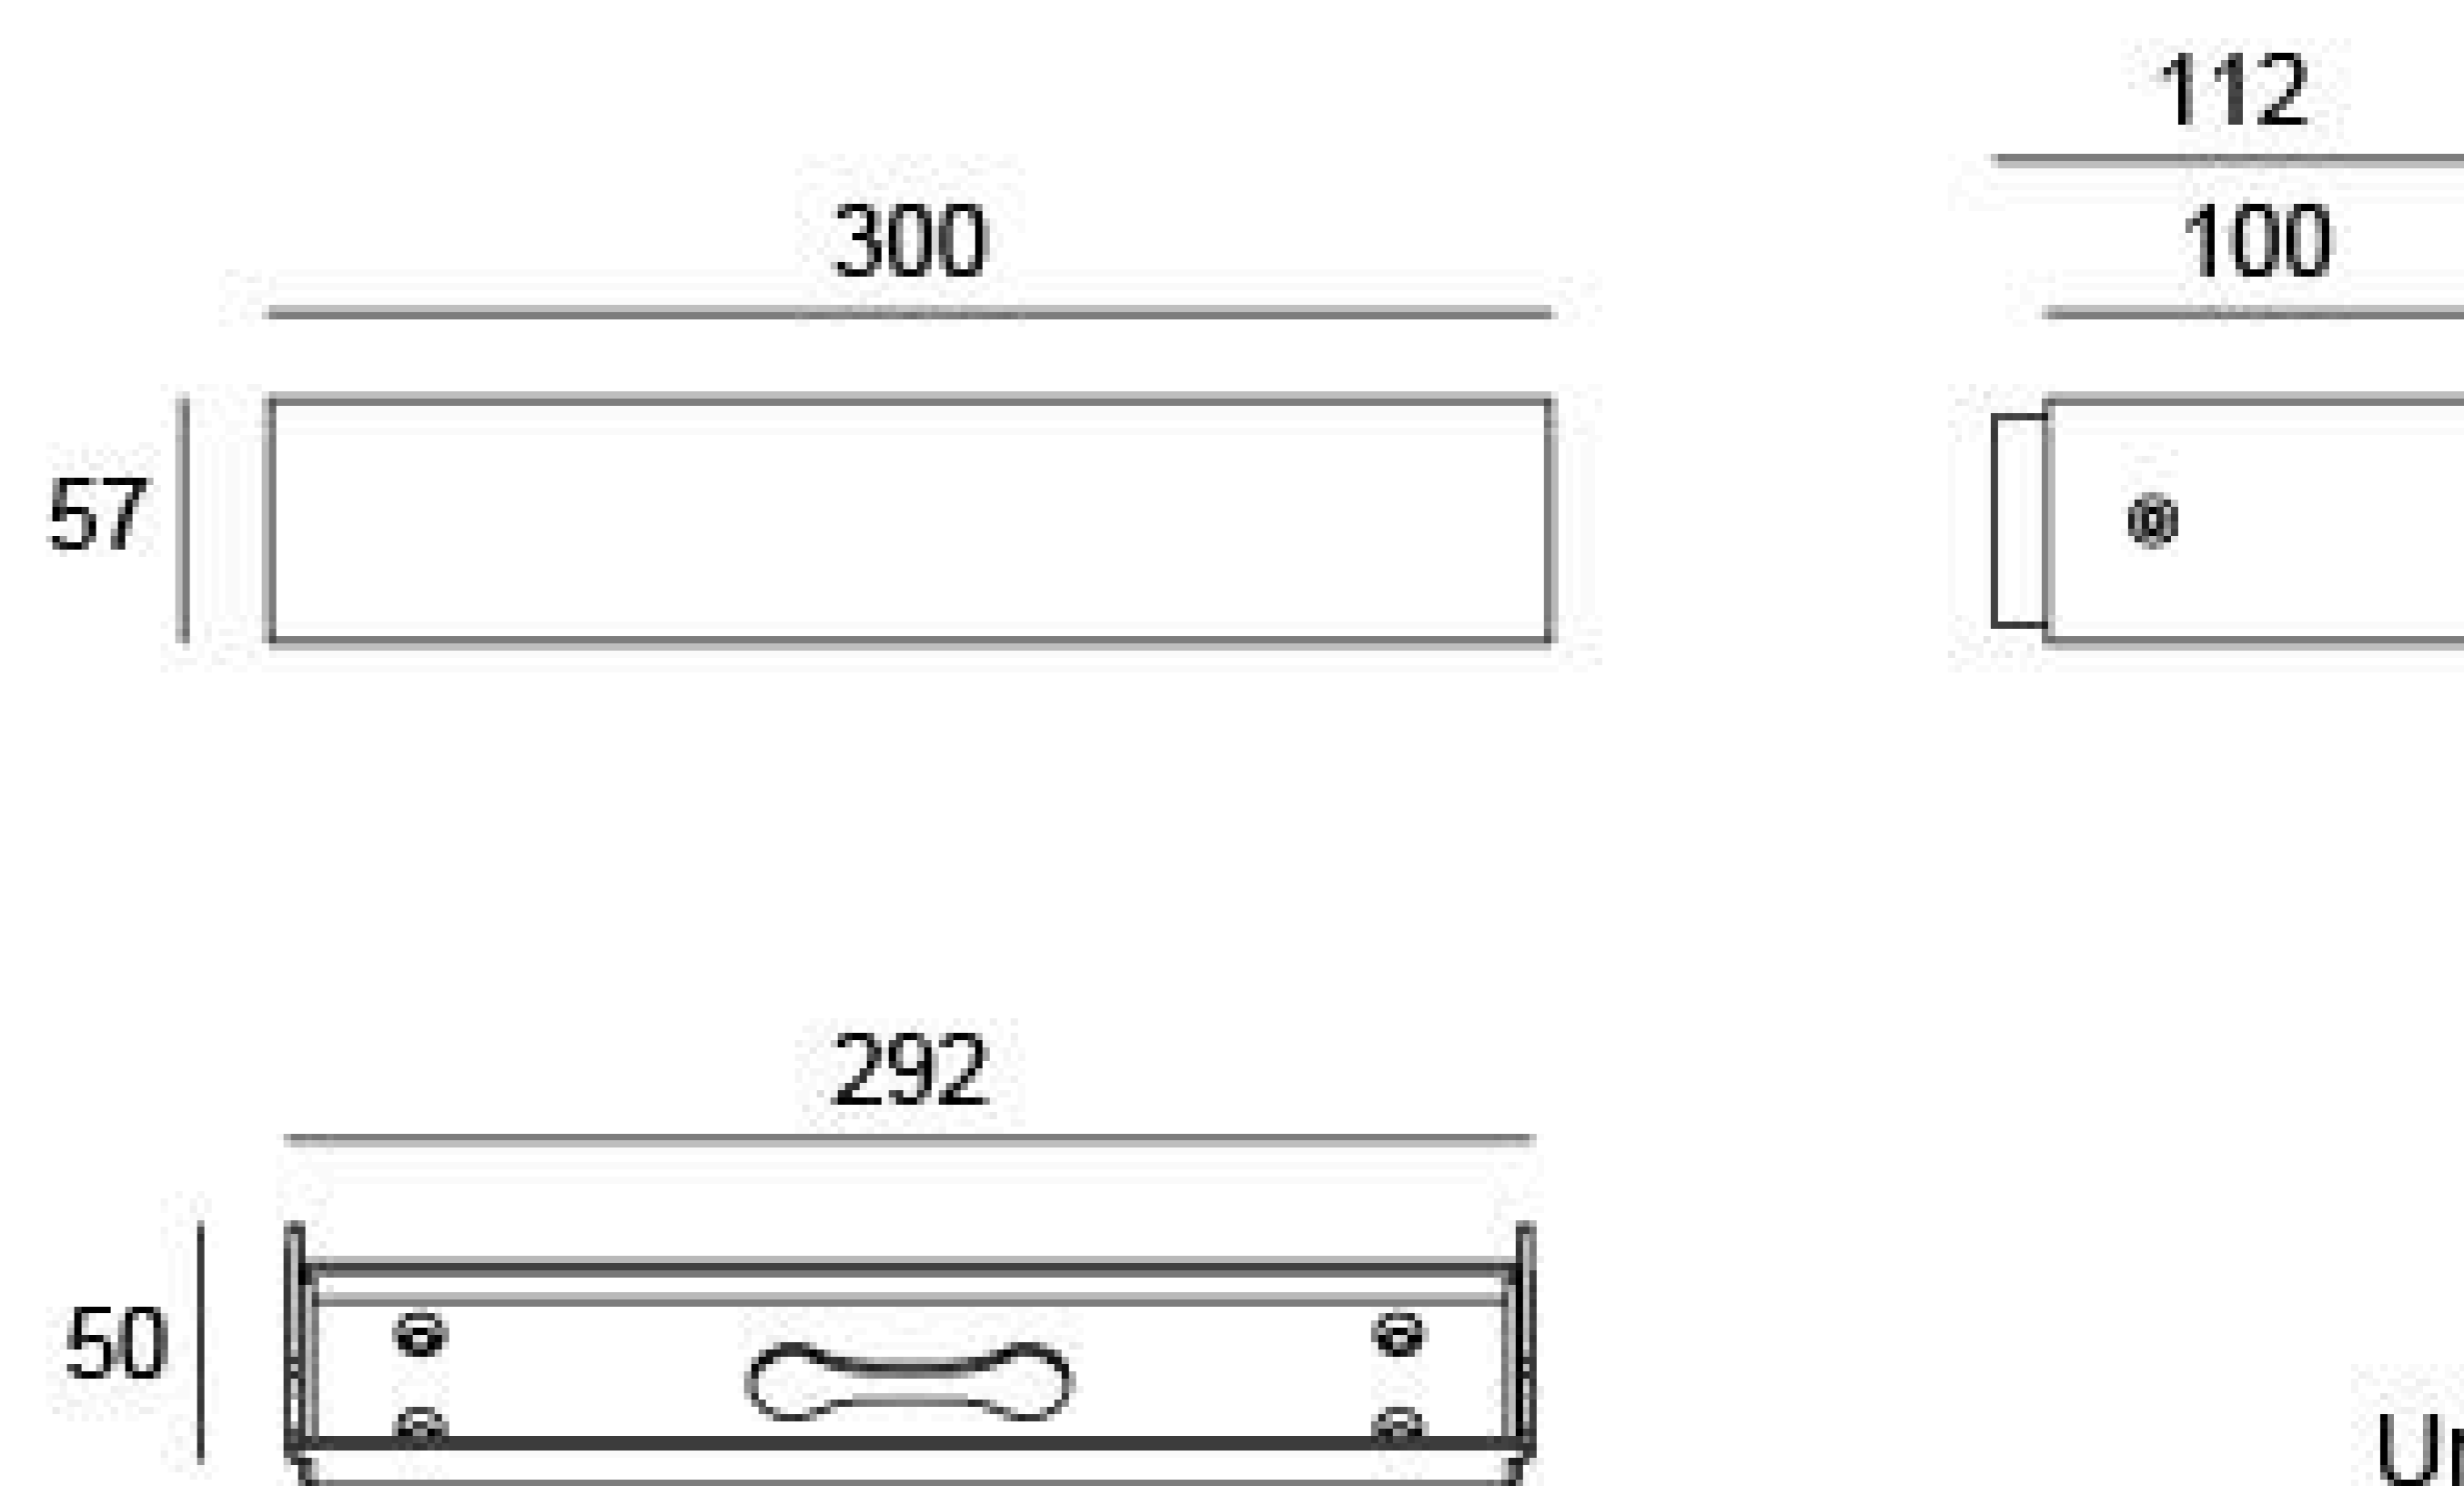

Unit: mm

Painting Color




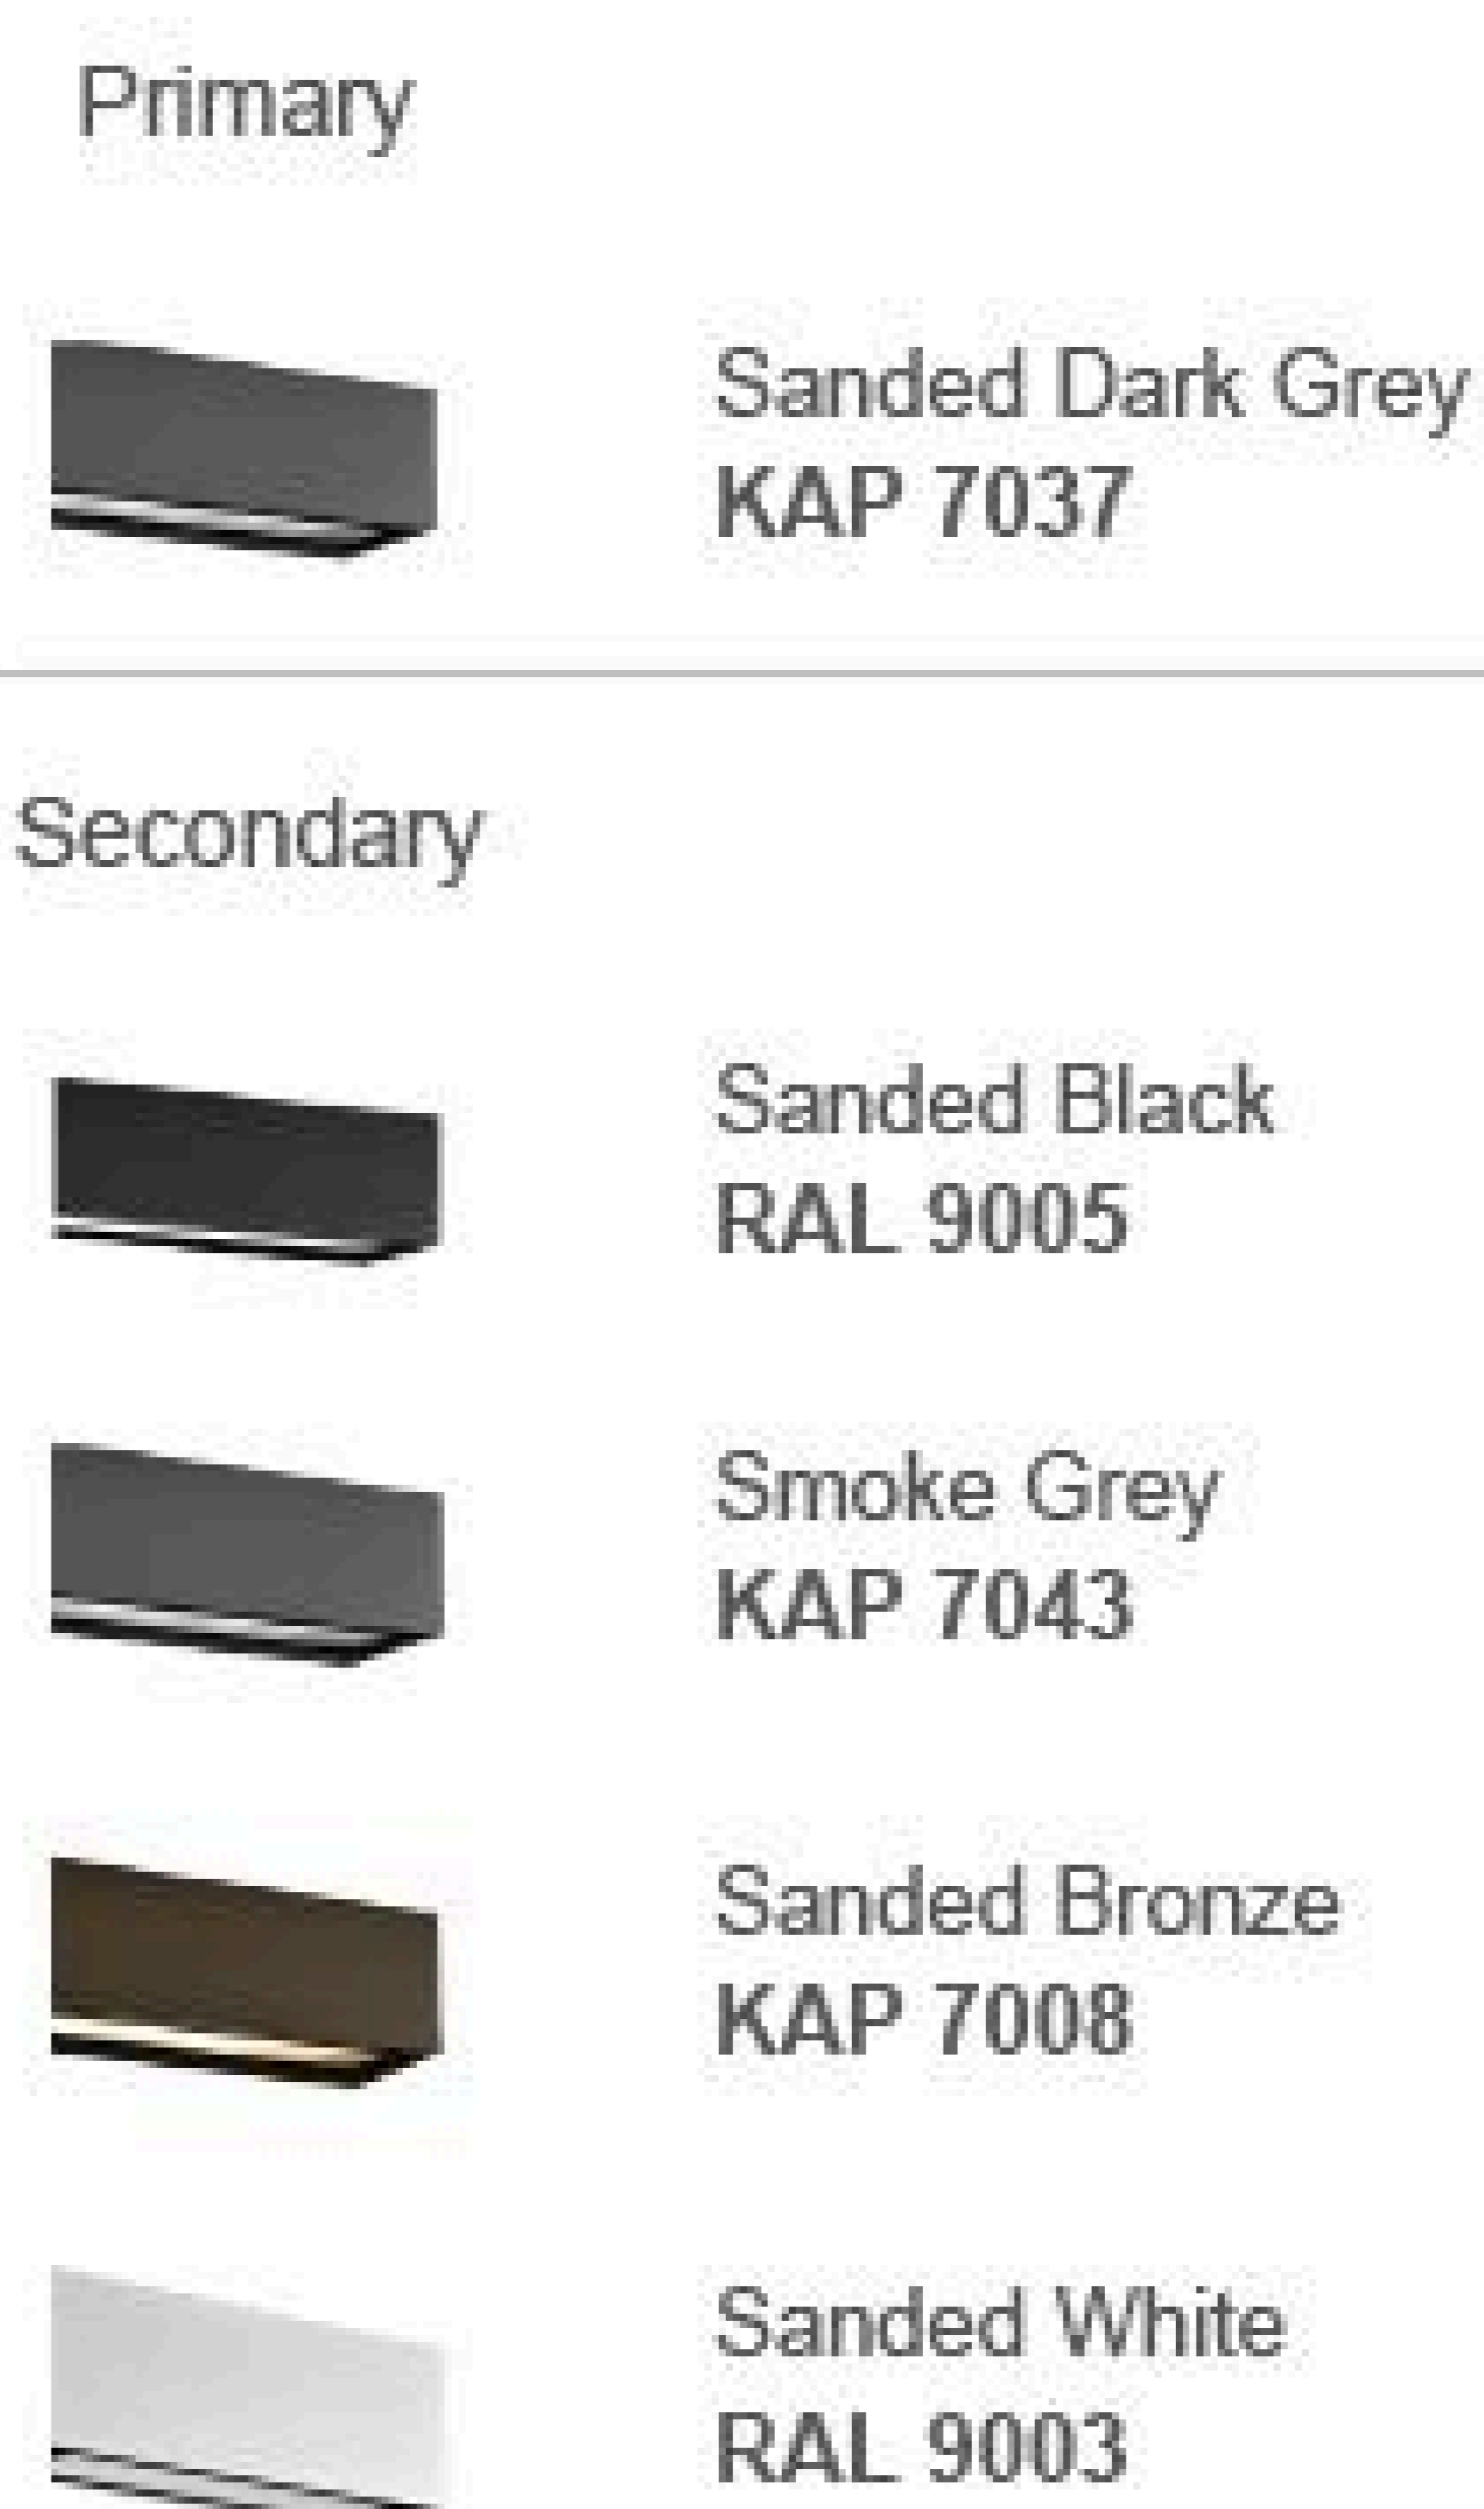


Diagram of Instruction

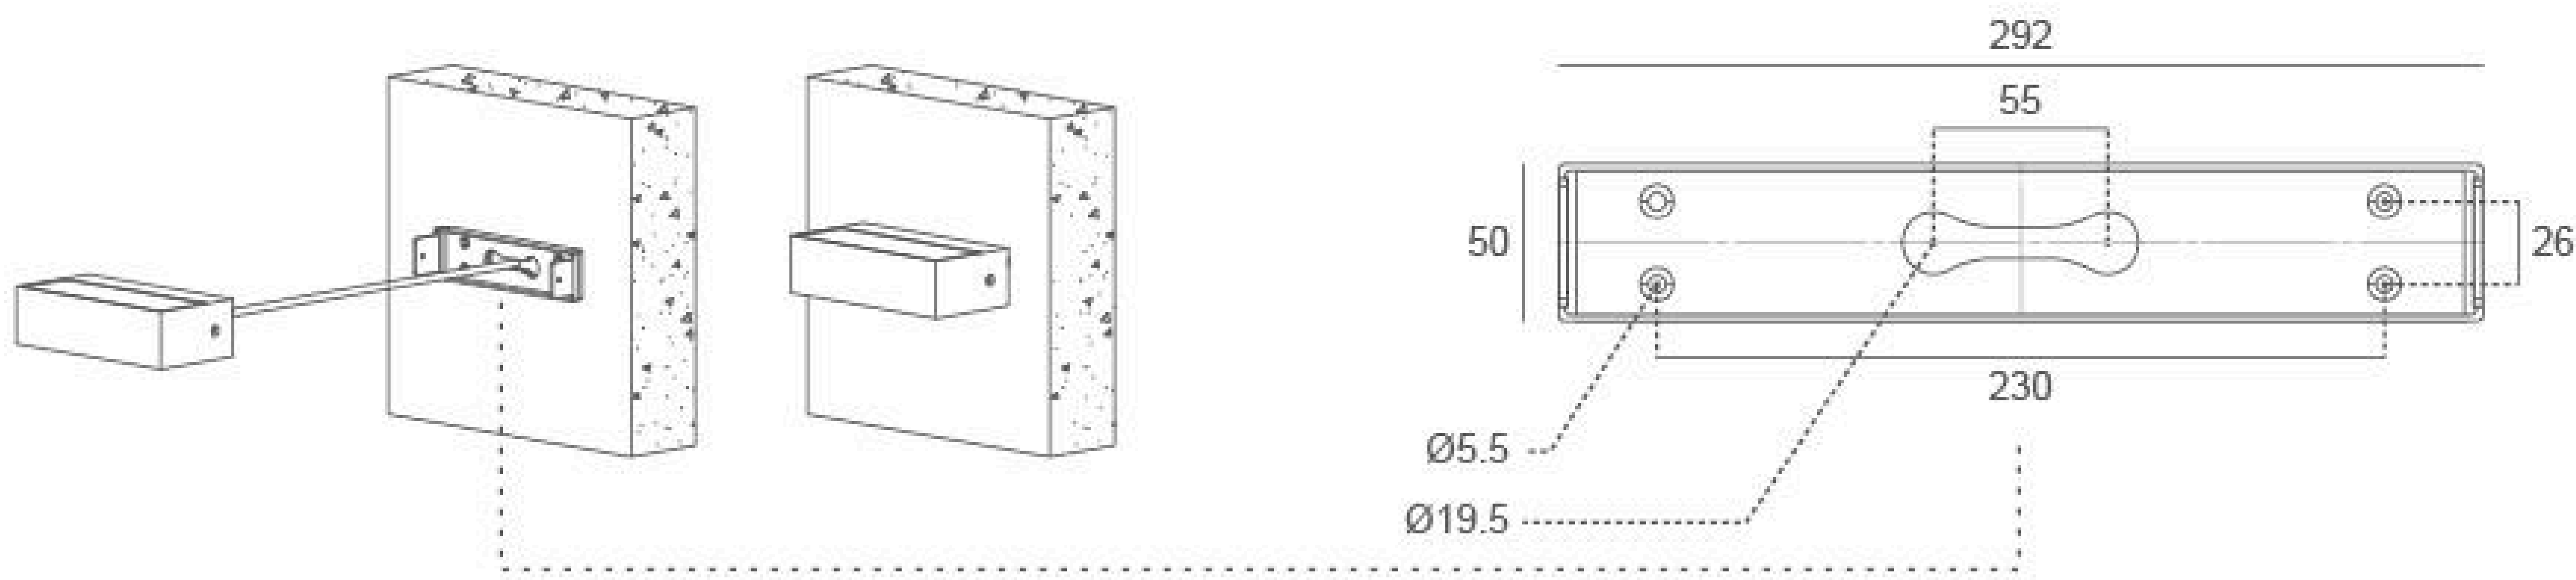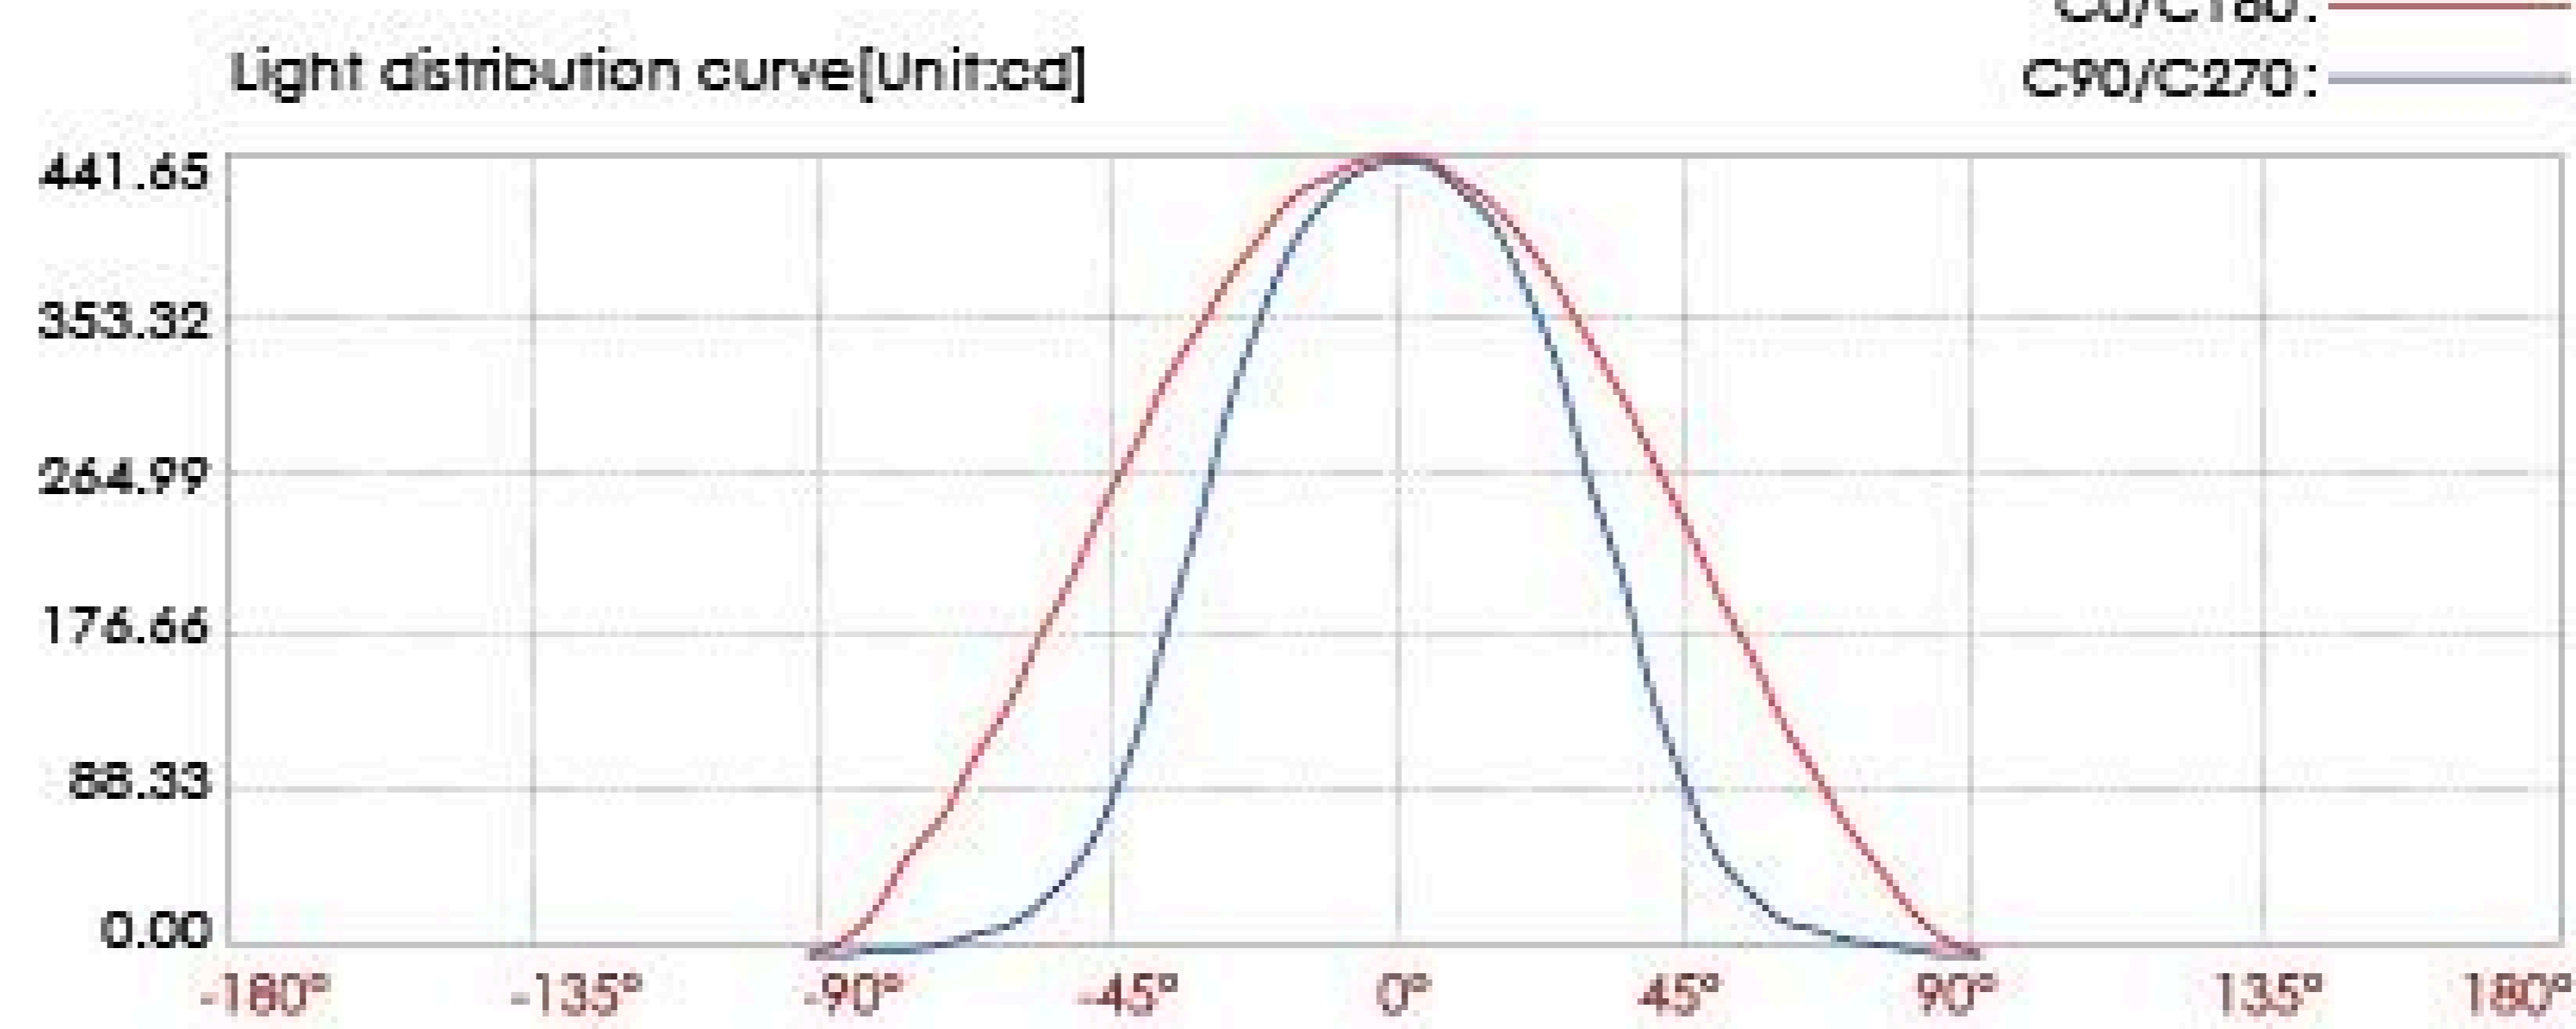

Photometric

12m	3.07 LUX
11m	
10m	4.42 LUX
9m	
8m	6.90 LUX
7m	
6m	12.27 LUX
5m	
4m	27.60 LUX
3m	
2m	110.41 LUX
1m	

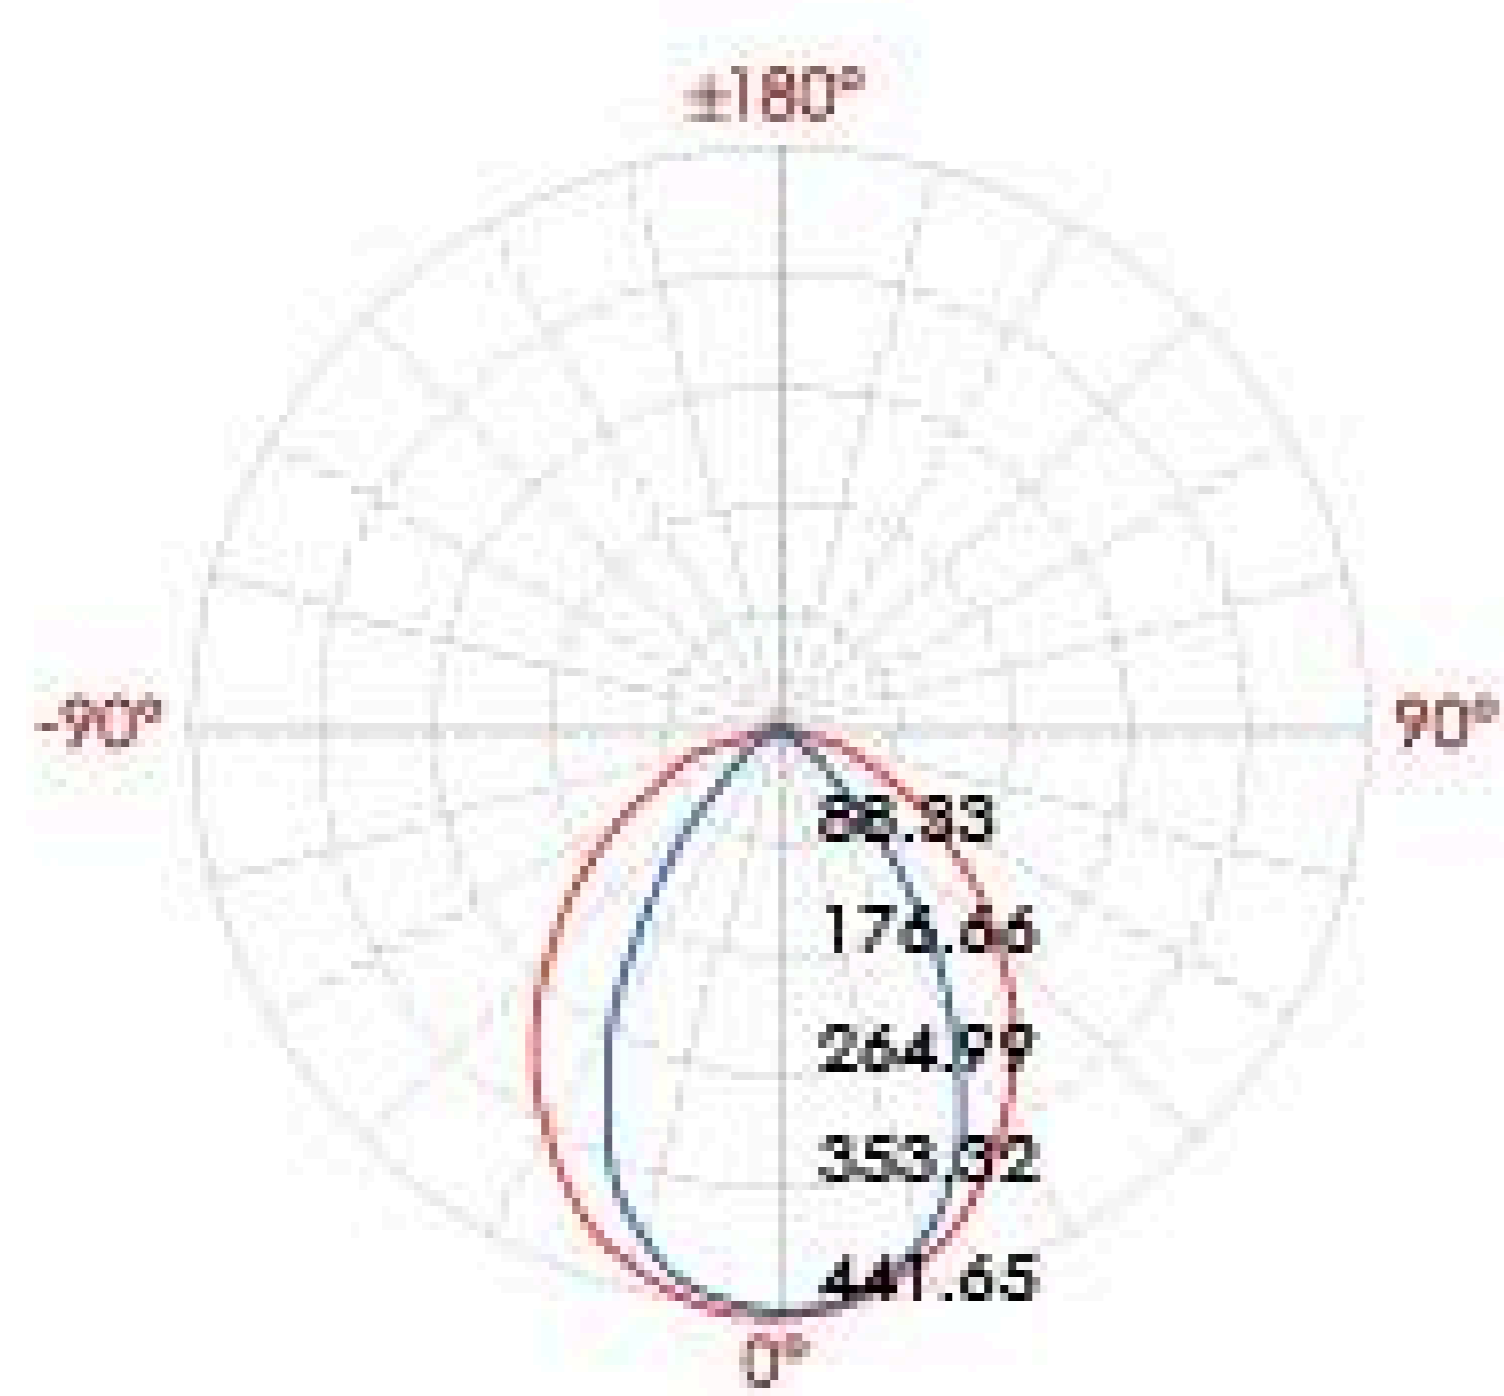

Center beam LUX	Beam width V	Beam height H
2m 110.41 LUX	4.4m	2.6m
4m 27.60 LUX	8.8m	5.3m
6m 12.27 LUX	13.3m	7.9m
8m 6.90 LUX	17.7m	10.5m
10m 4.42 LUX	22.1m	13.1m
12m 3.07 LUX	26.5m	15.8m

Ver.Spread:95.8 Horiz.Spread:66.7