


07HBE2ED2456 (TWO SIDE)

Light Source	24x1W
Selected Degree (°)θ1/2	95° x 65°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1250 240V=134
Consumption (W)	24V/240V=30
Luminance (LM)	WW=832x2
IK	04

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Linear Drawing

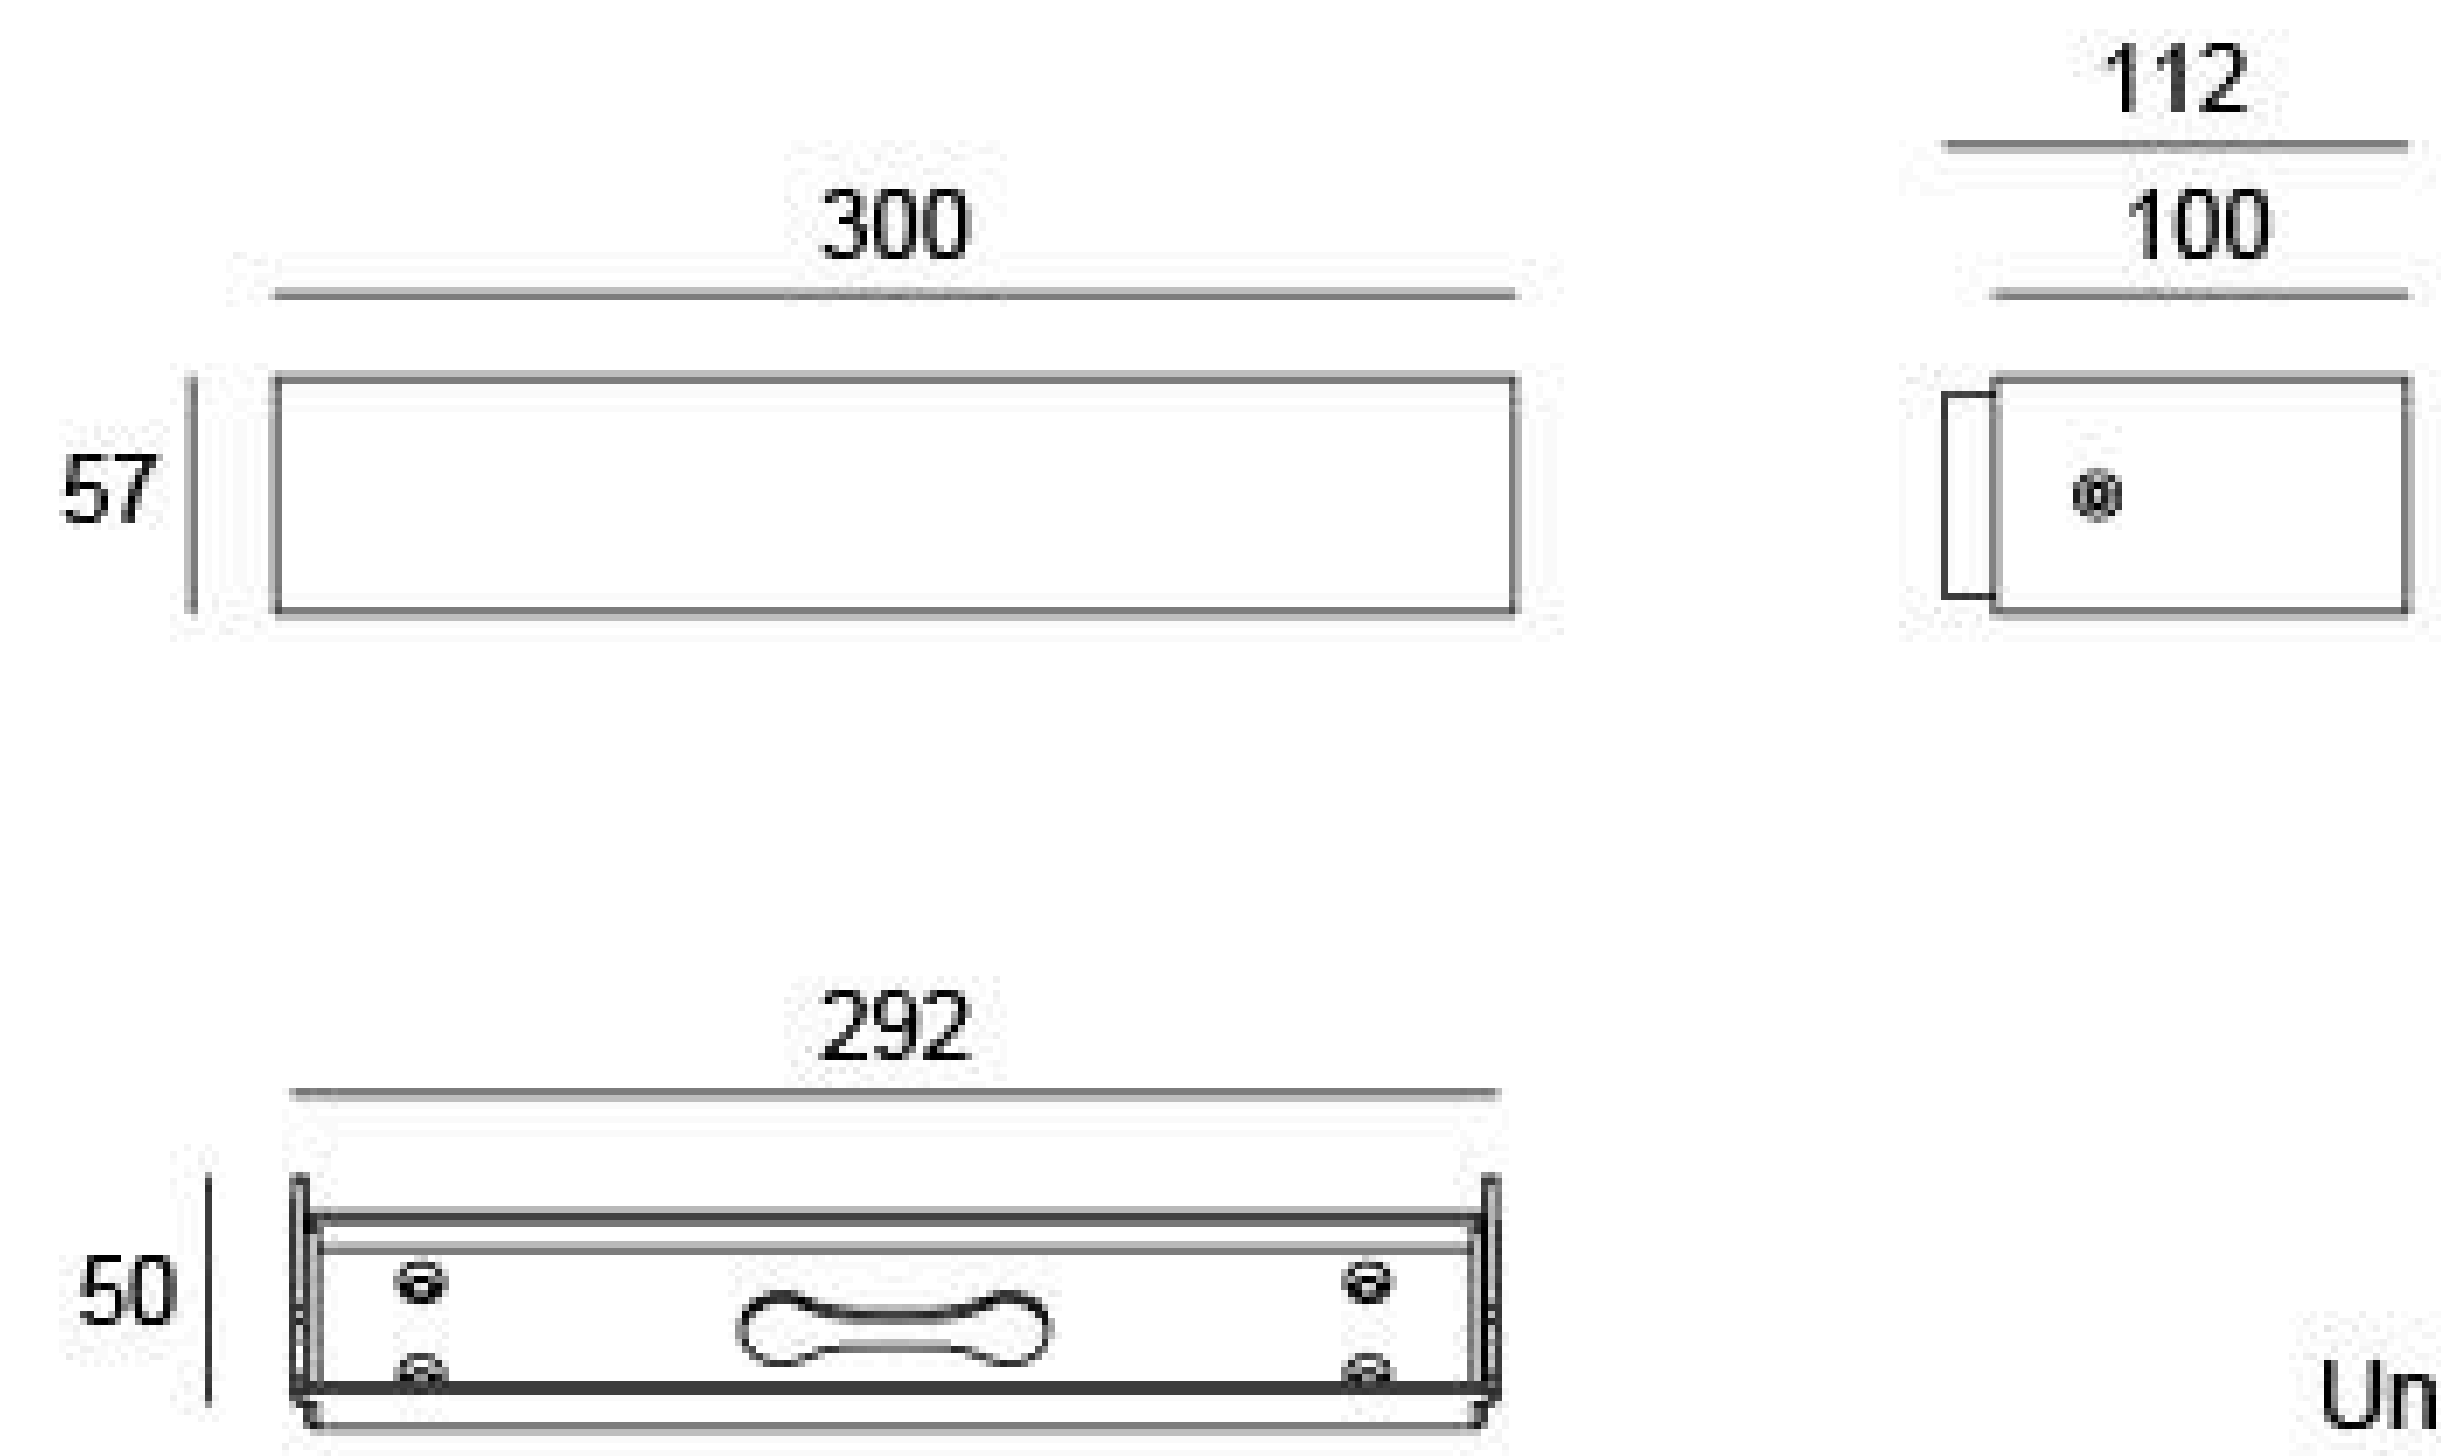


Unit: mm

Painting Color

- Primary**
 - Sanded Dark Grey KAP 7037
- Secondary**
 - Sanded Black RAL 9005
 - Smoke Grey KAP 7043
 - Sanded Bronze KAP 7008
 - Sanded White RAL 9003

Diagram of Instruction

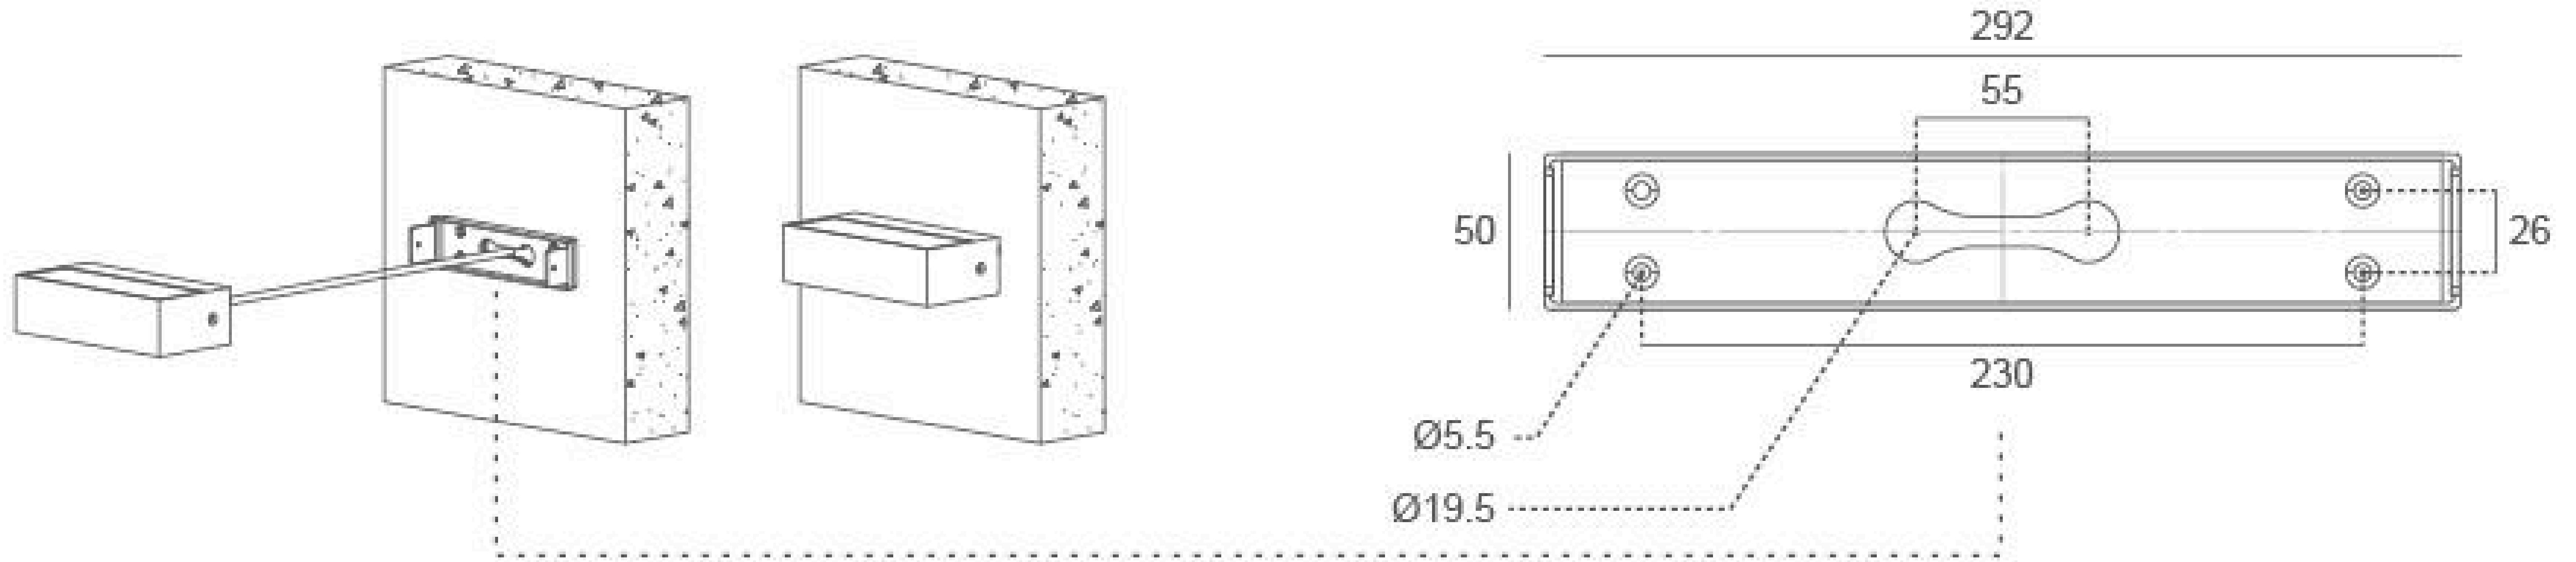

Photometric

