


## 07KBE2ED1656 (TWO SIDE)

Light Source	16x0.7W
Selected Degree (°)θ1/2	83° x 72°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=541 240V=61
Consumption (W)	24V=13 240V=13.7
Luminance (LM)	WW=418x2
IK	05

## Linear Drawing

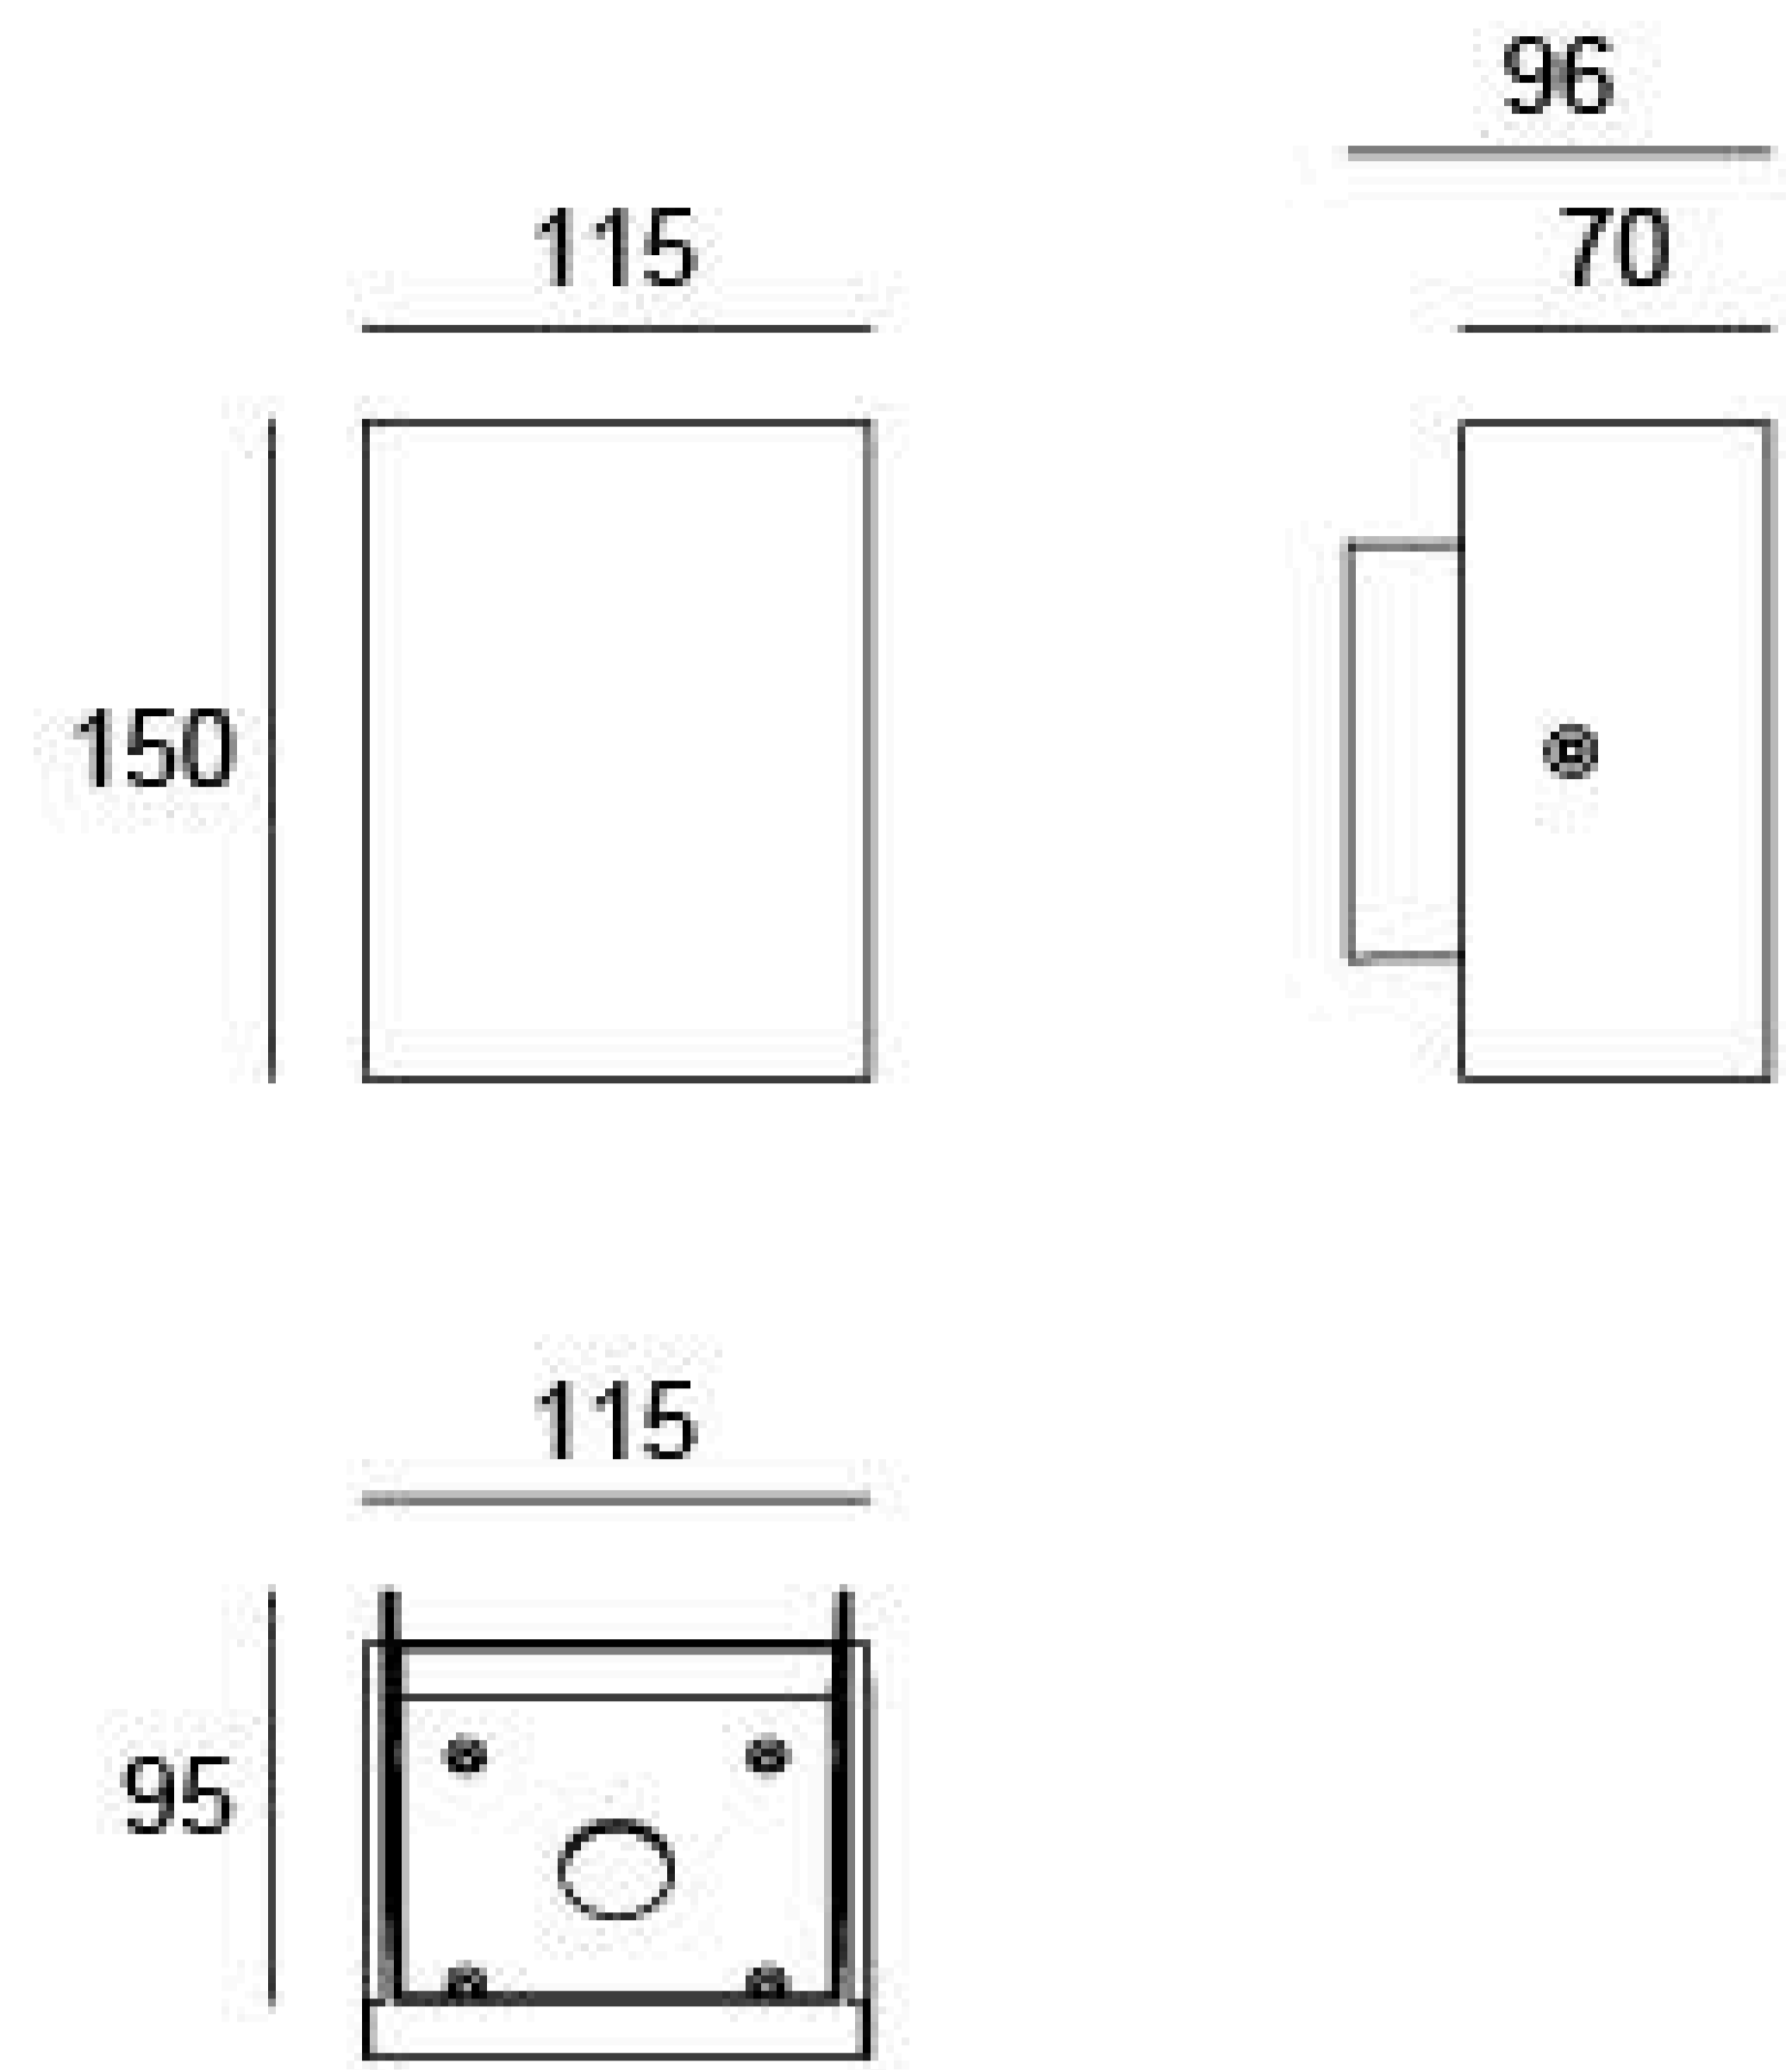

Unit: mm

## Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm <sup>2</sup> , L=0.3m 240V: H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m
Dimming Support	External DALI supported TRIAC, 0-10V, PWM via external driver on request


## Painting Color

### Primary



Sanded Dark Grey  
KAP 7037


### Secondary




Sanded Black  
RAL 9005



Smoke Grey  
KAP 7043

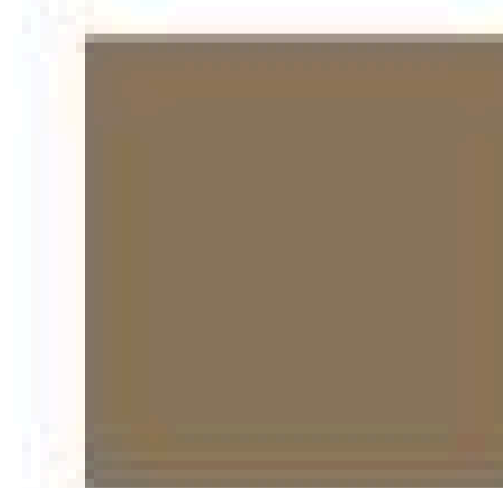

Sanded Bronze  
KAP 7008



Sanded White  
RAL 9003

## Diagram of Instruction

