


07LBE2ED1256 (TWO SIDE)

Light Source	12x1W
Selected Degree (°)θ1/2	86° x 72°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=625 240V=66
Consumption (W)	24V/240V=15
Luminance (LM)	WW=432x2
IK	03

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered frosted glass T=3mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.3m 240V: H05RN-F 3×1.0mm ² , L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Linear Drawing

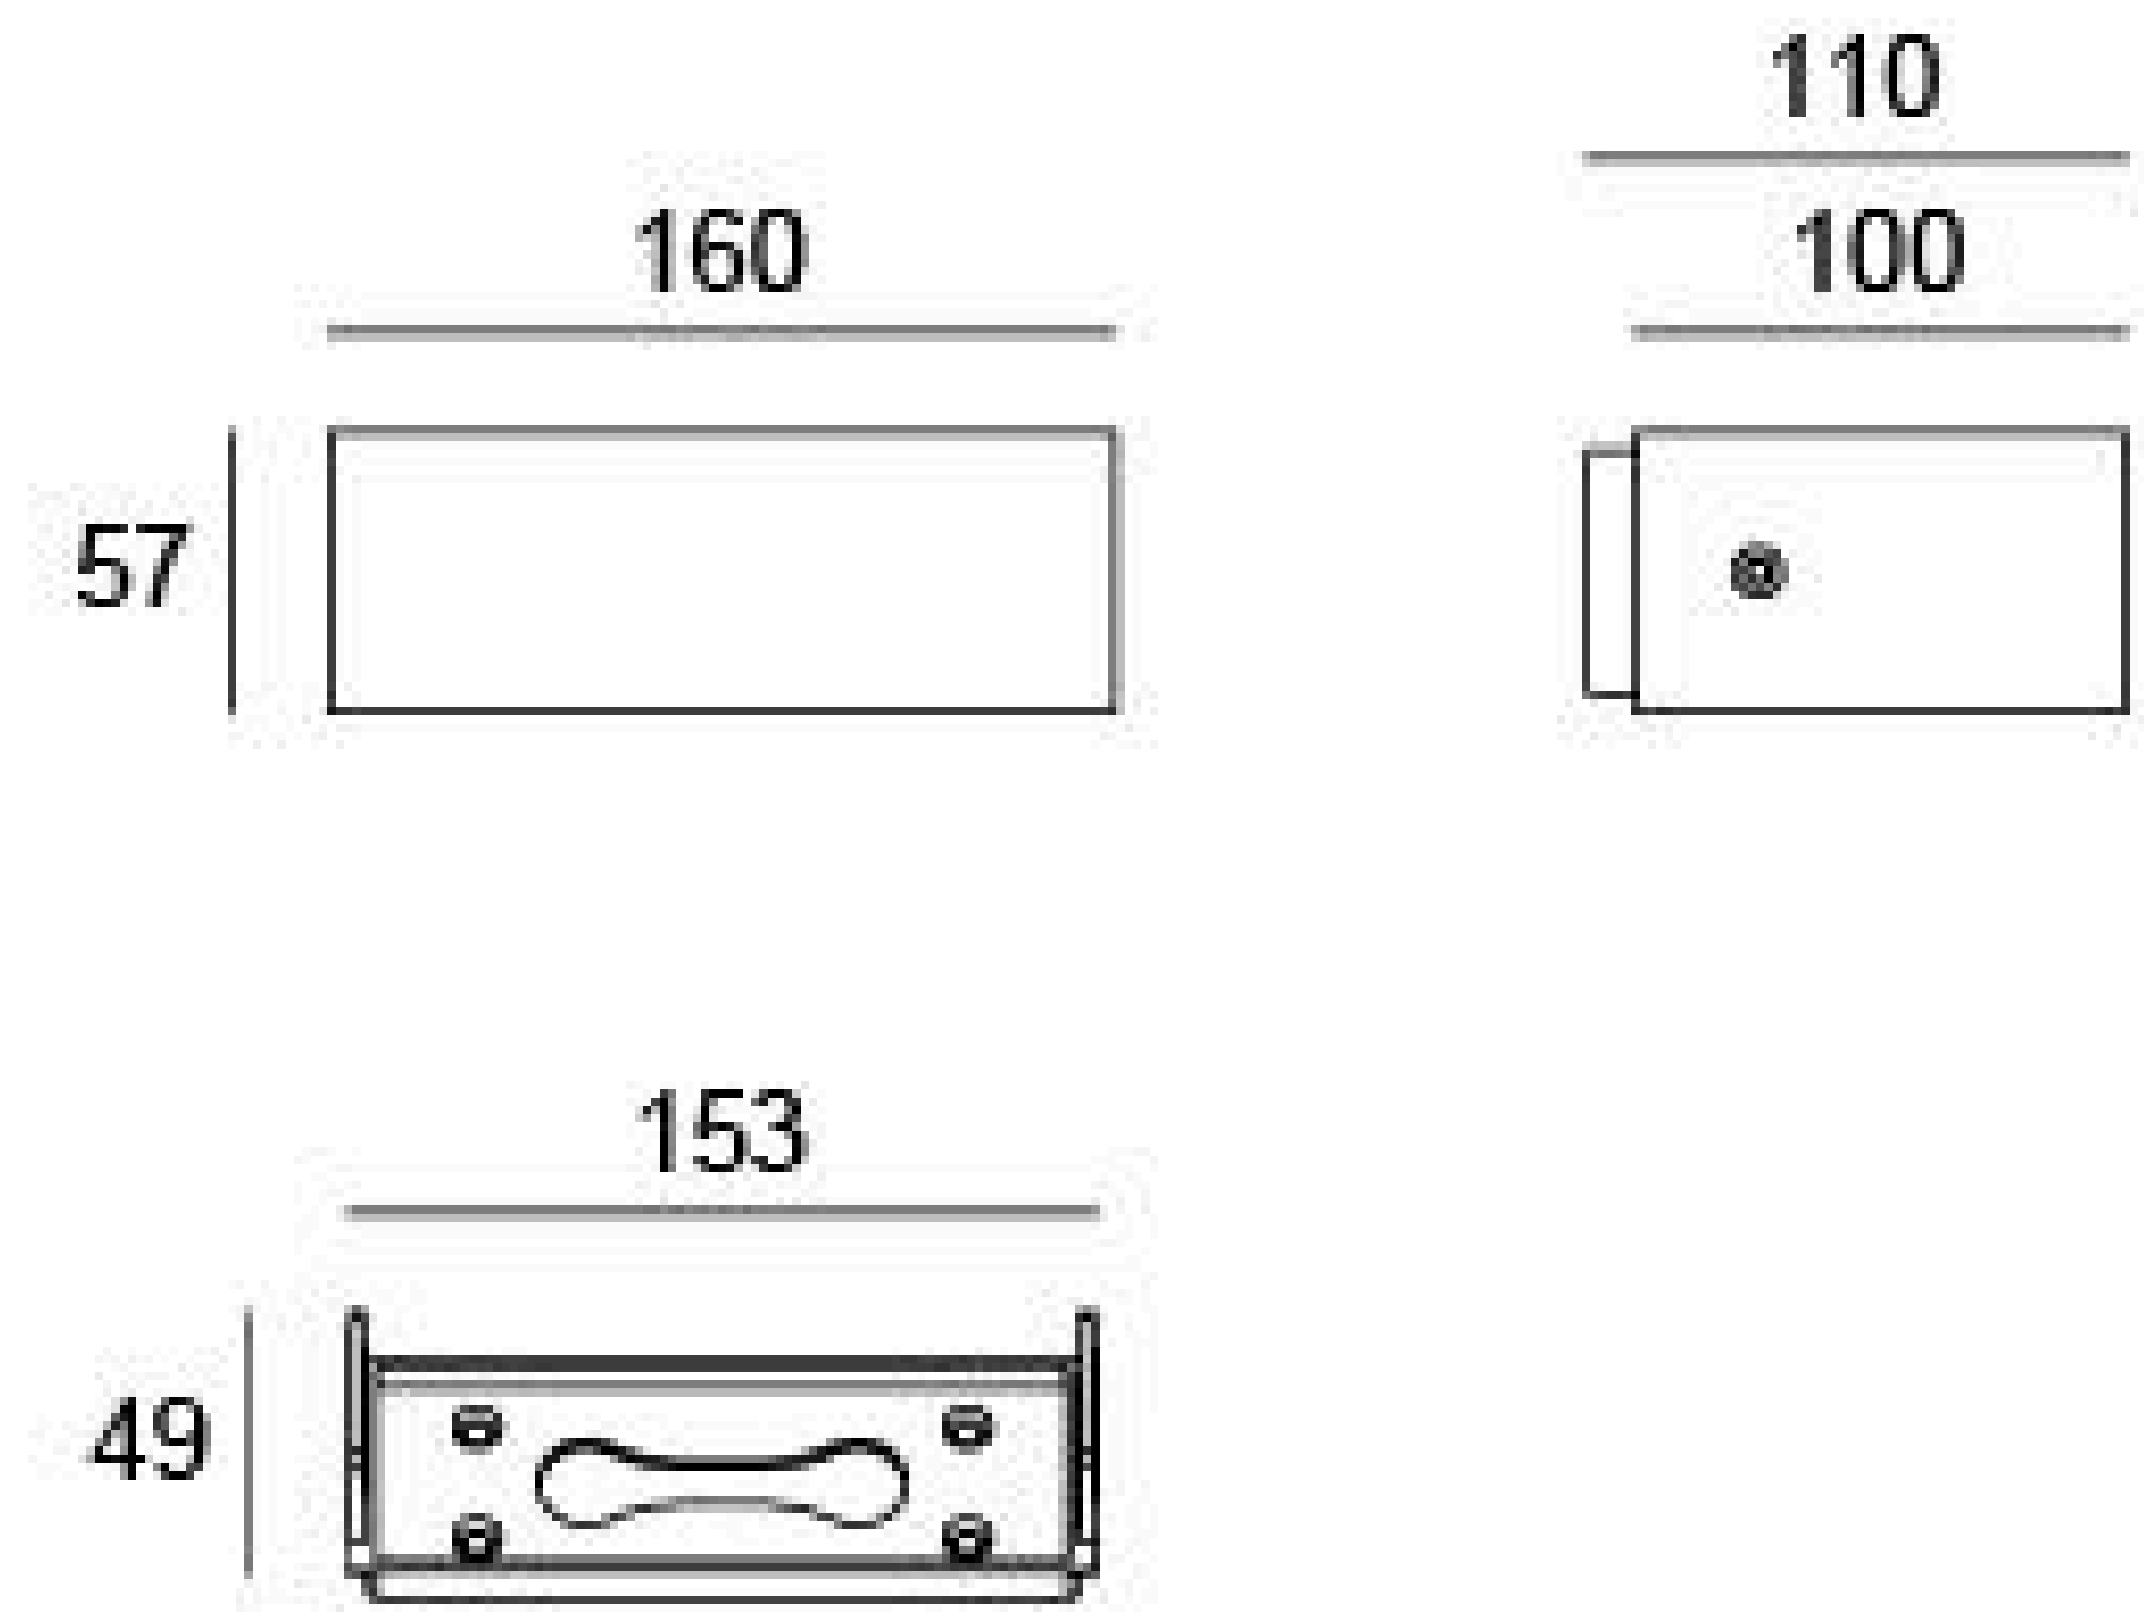

Unit: mm

Painting Color


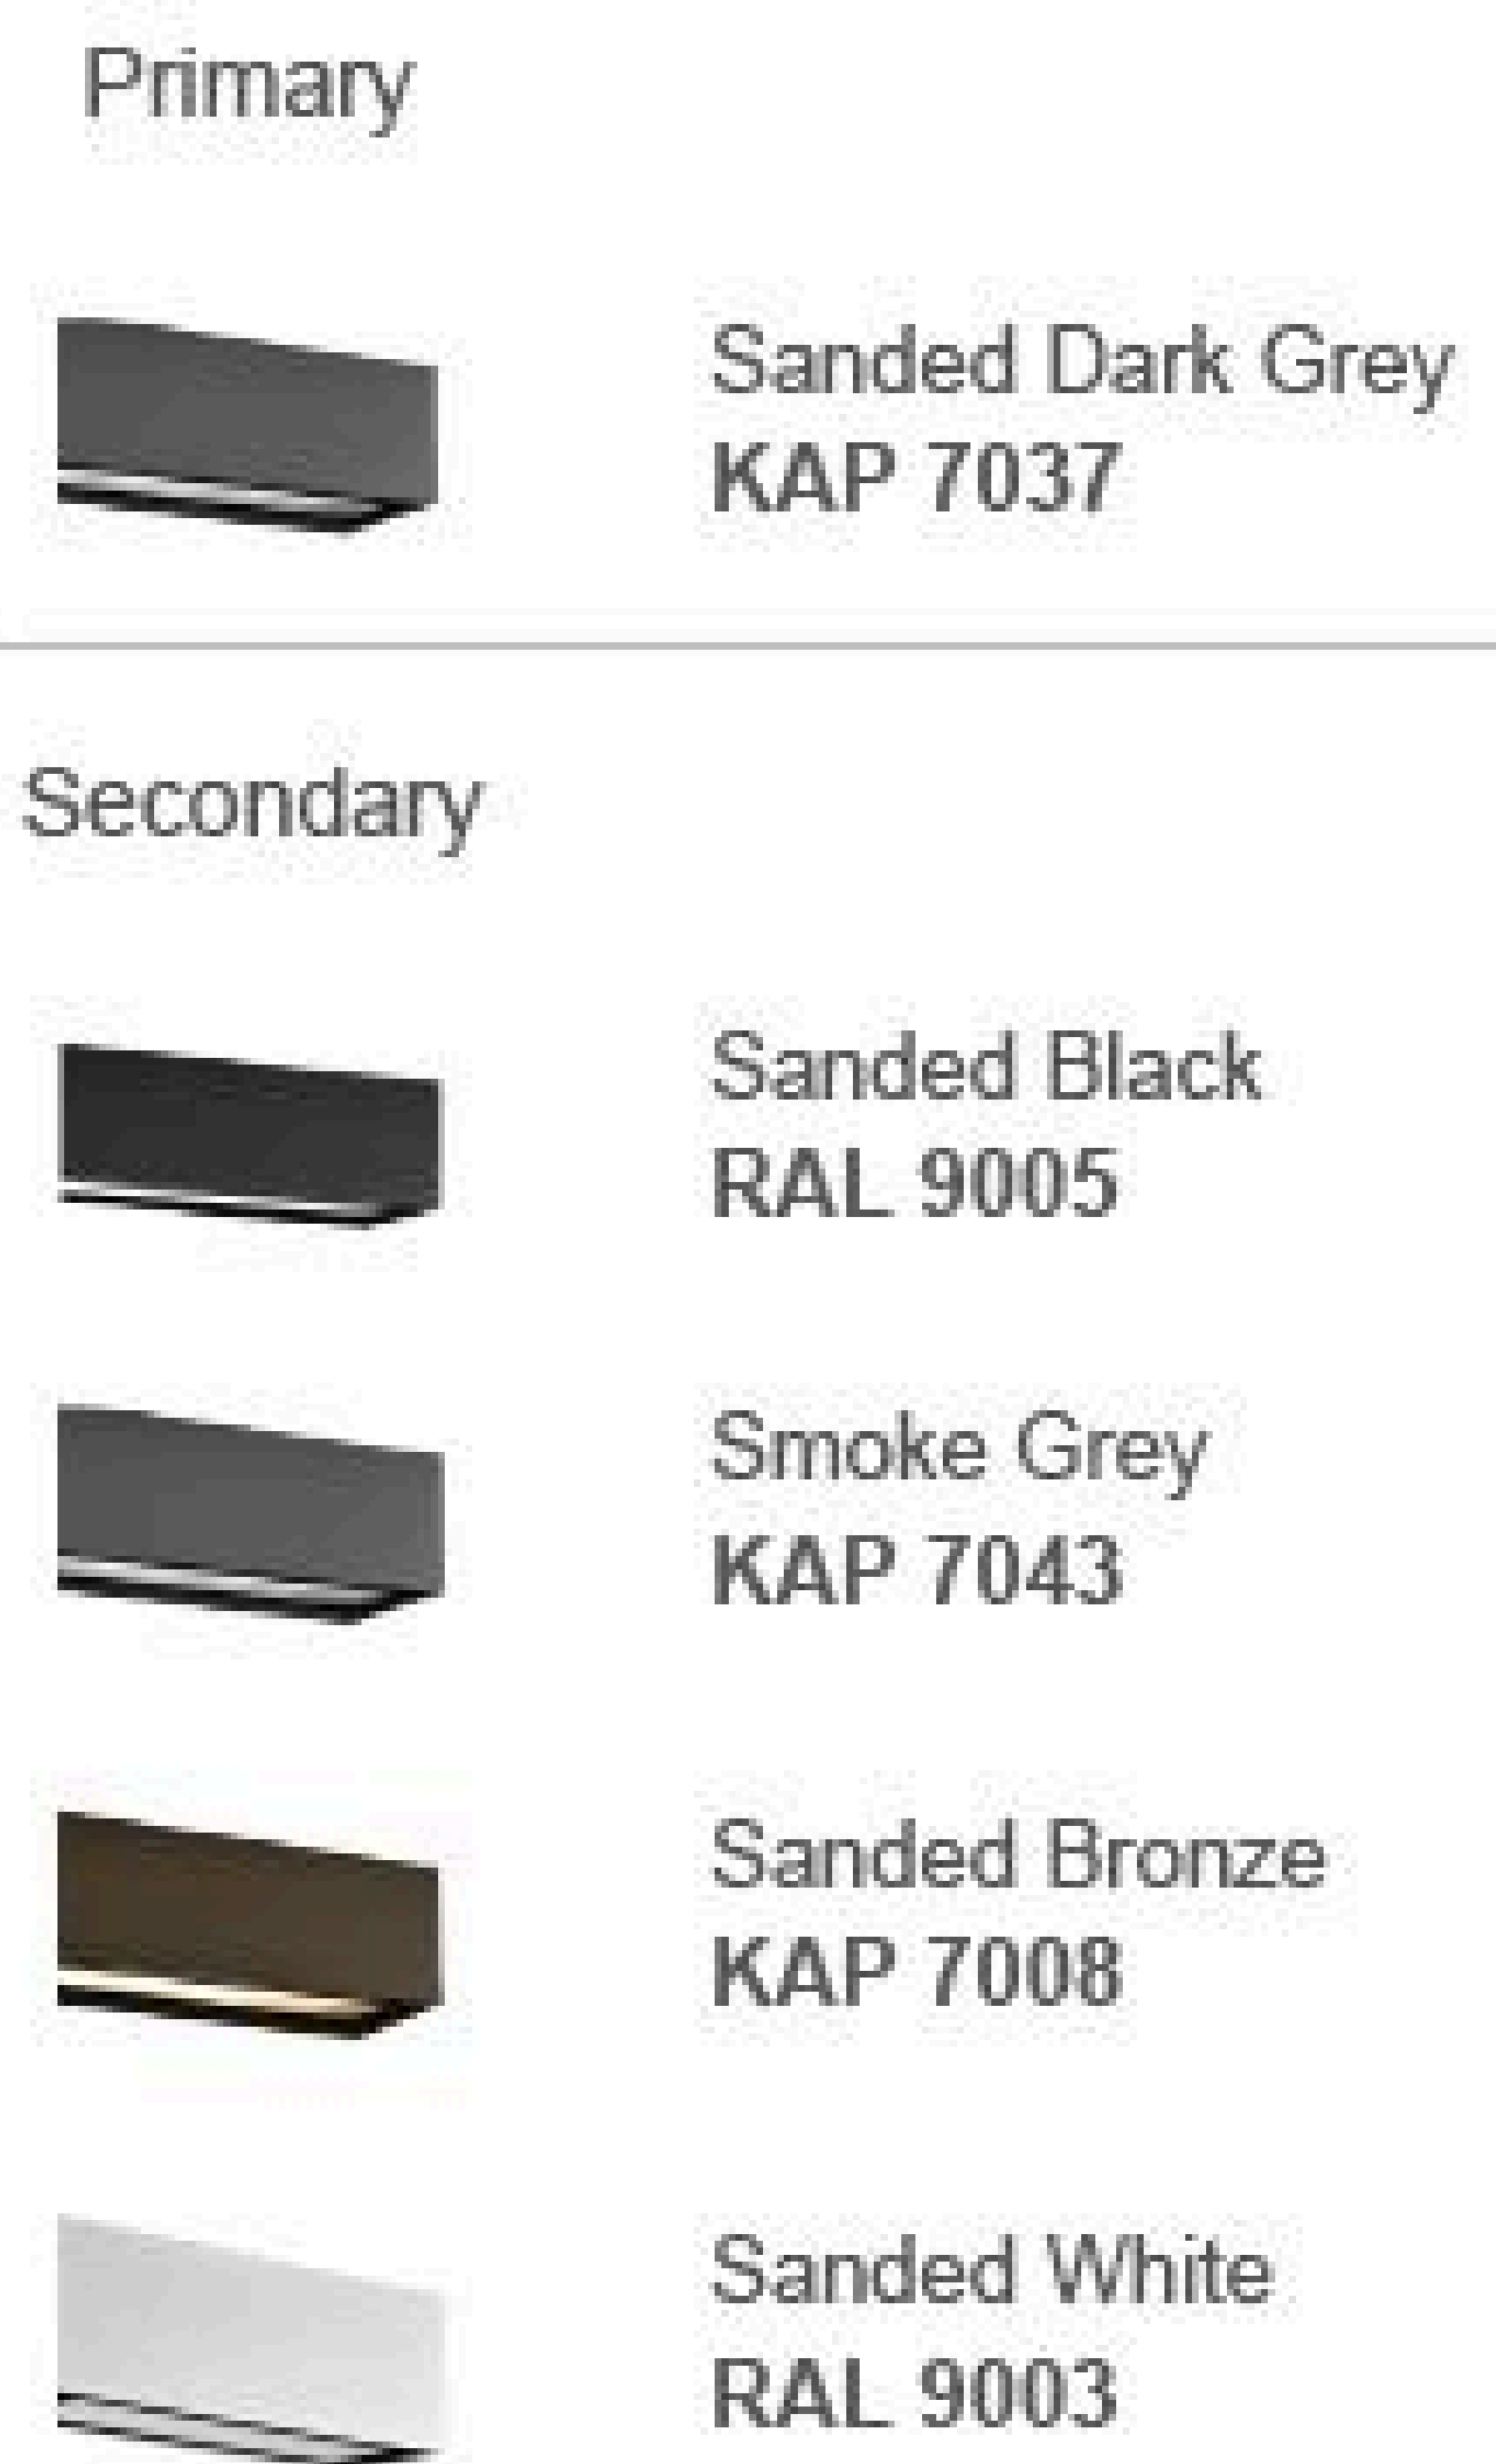


Diagram of Instruction



Photometric

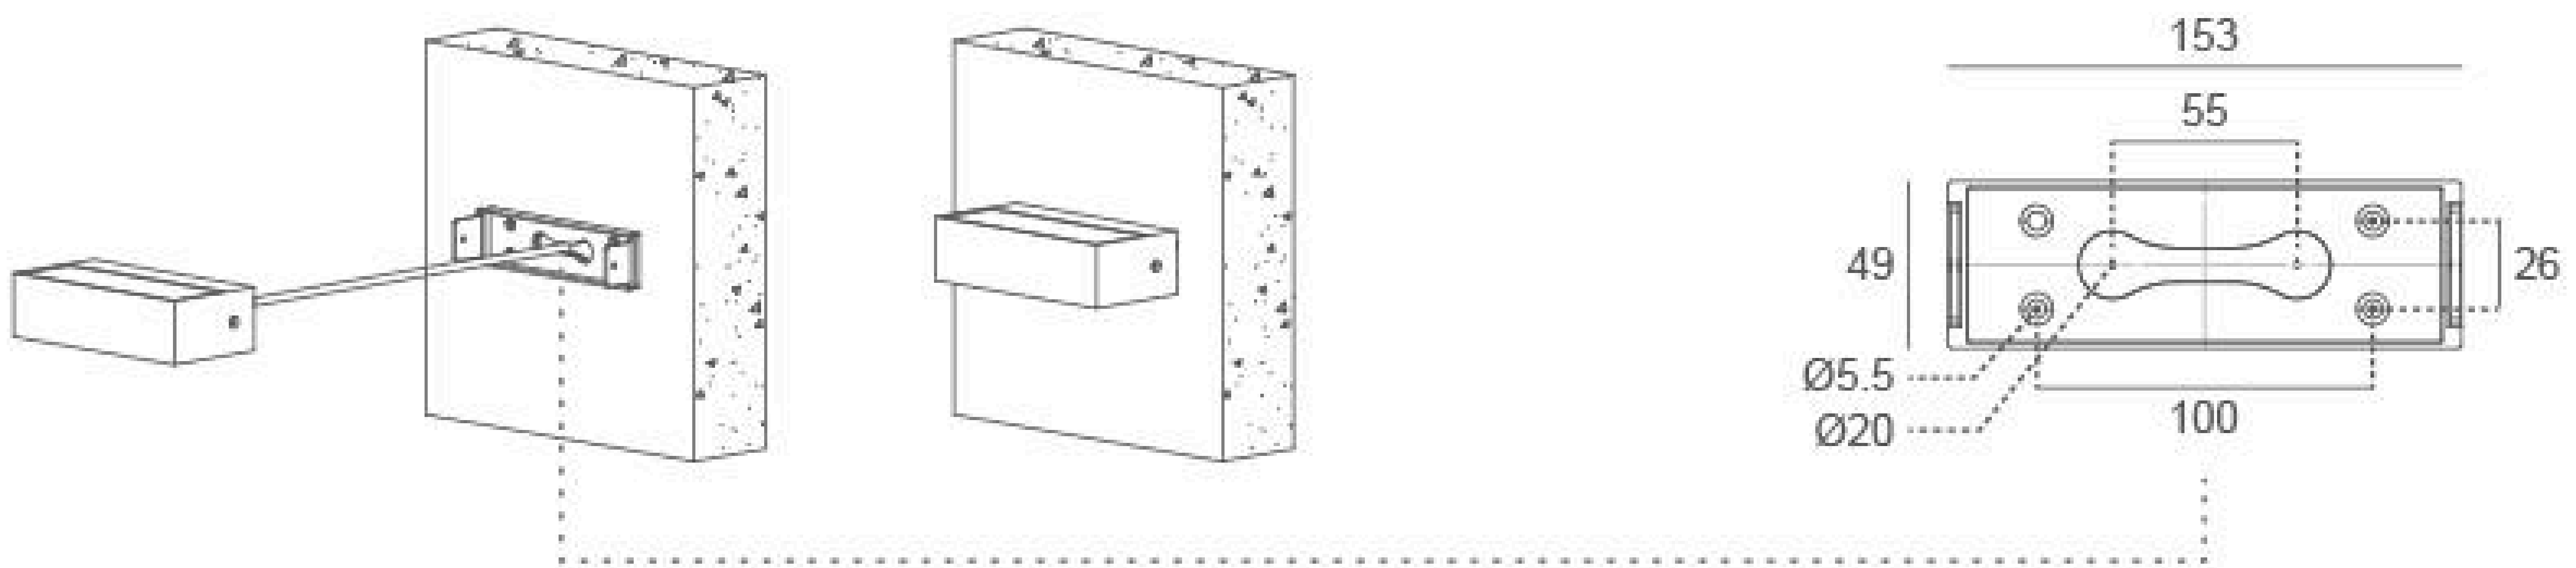