


07PBD2EB2056 (TWO SIDE)

Light Source	20x1W
Lens	B115
Selected Degree (°)θ1/2	40°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=1083 240V=115
Consumption (W)	24V/240V=26
Luminance (LM)	WW=1000x2
IK	06

Linear Drawing

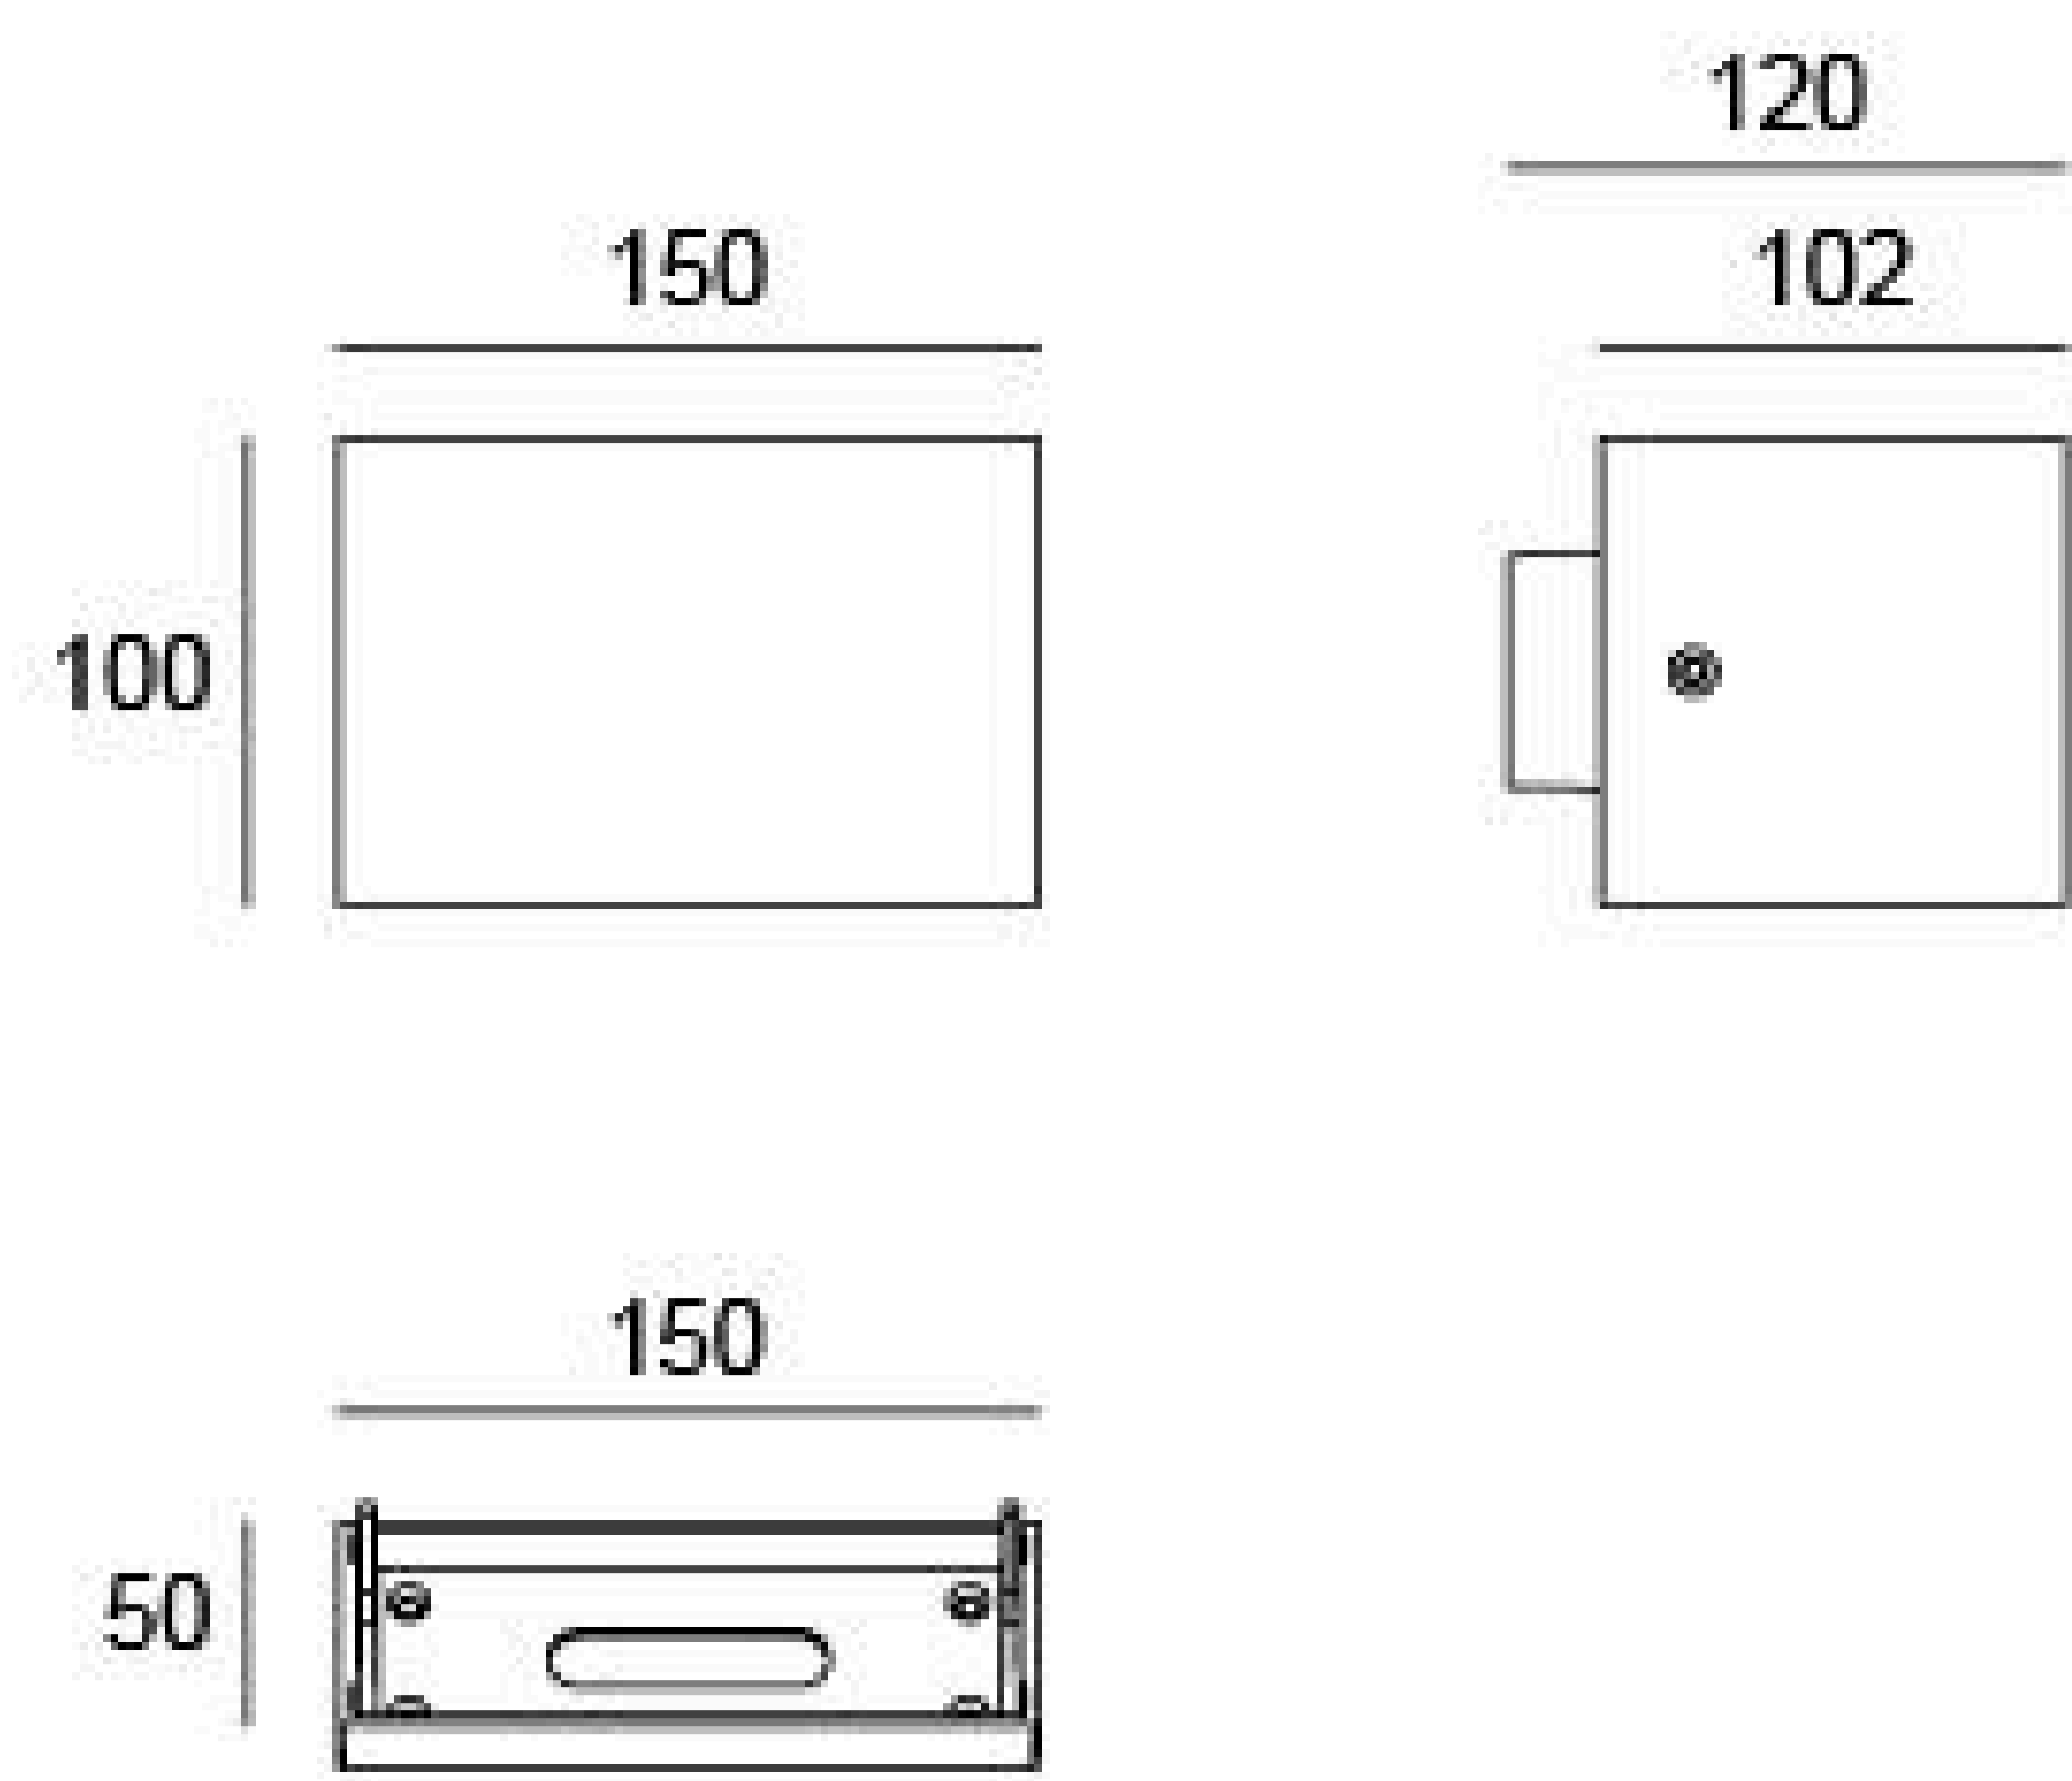

Unit: mm

Specification

Housing	12# Die-casting aluminum finishing or powder Painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	T=3mm
Gasket	Waterproof silicone gasket
LED Type	SMD
Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.3m 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Lens (Item Code)

Referenced Degree(°)θ1/2




B115

40°


Painting Color

Primary

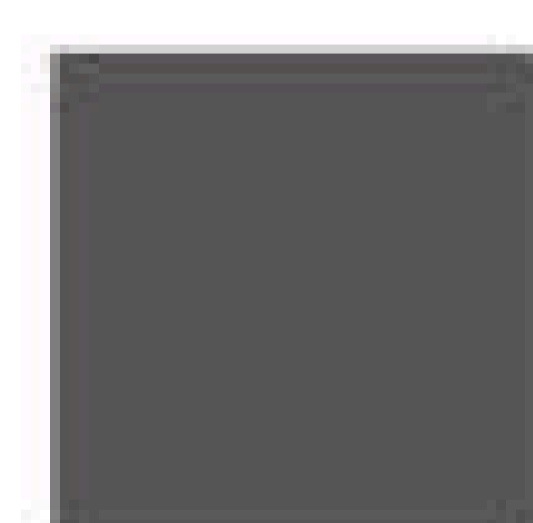


Sanded Dark Grey
KAP 7037

Secondary



Sanded Black
RAL 9005




Sanded White
RAL 9003





Sanded Bronze
KAP 7008

Diagram of Instruction

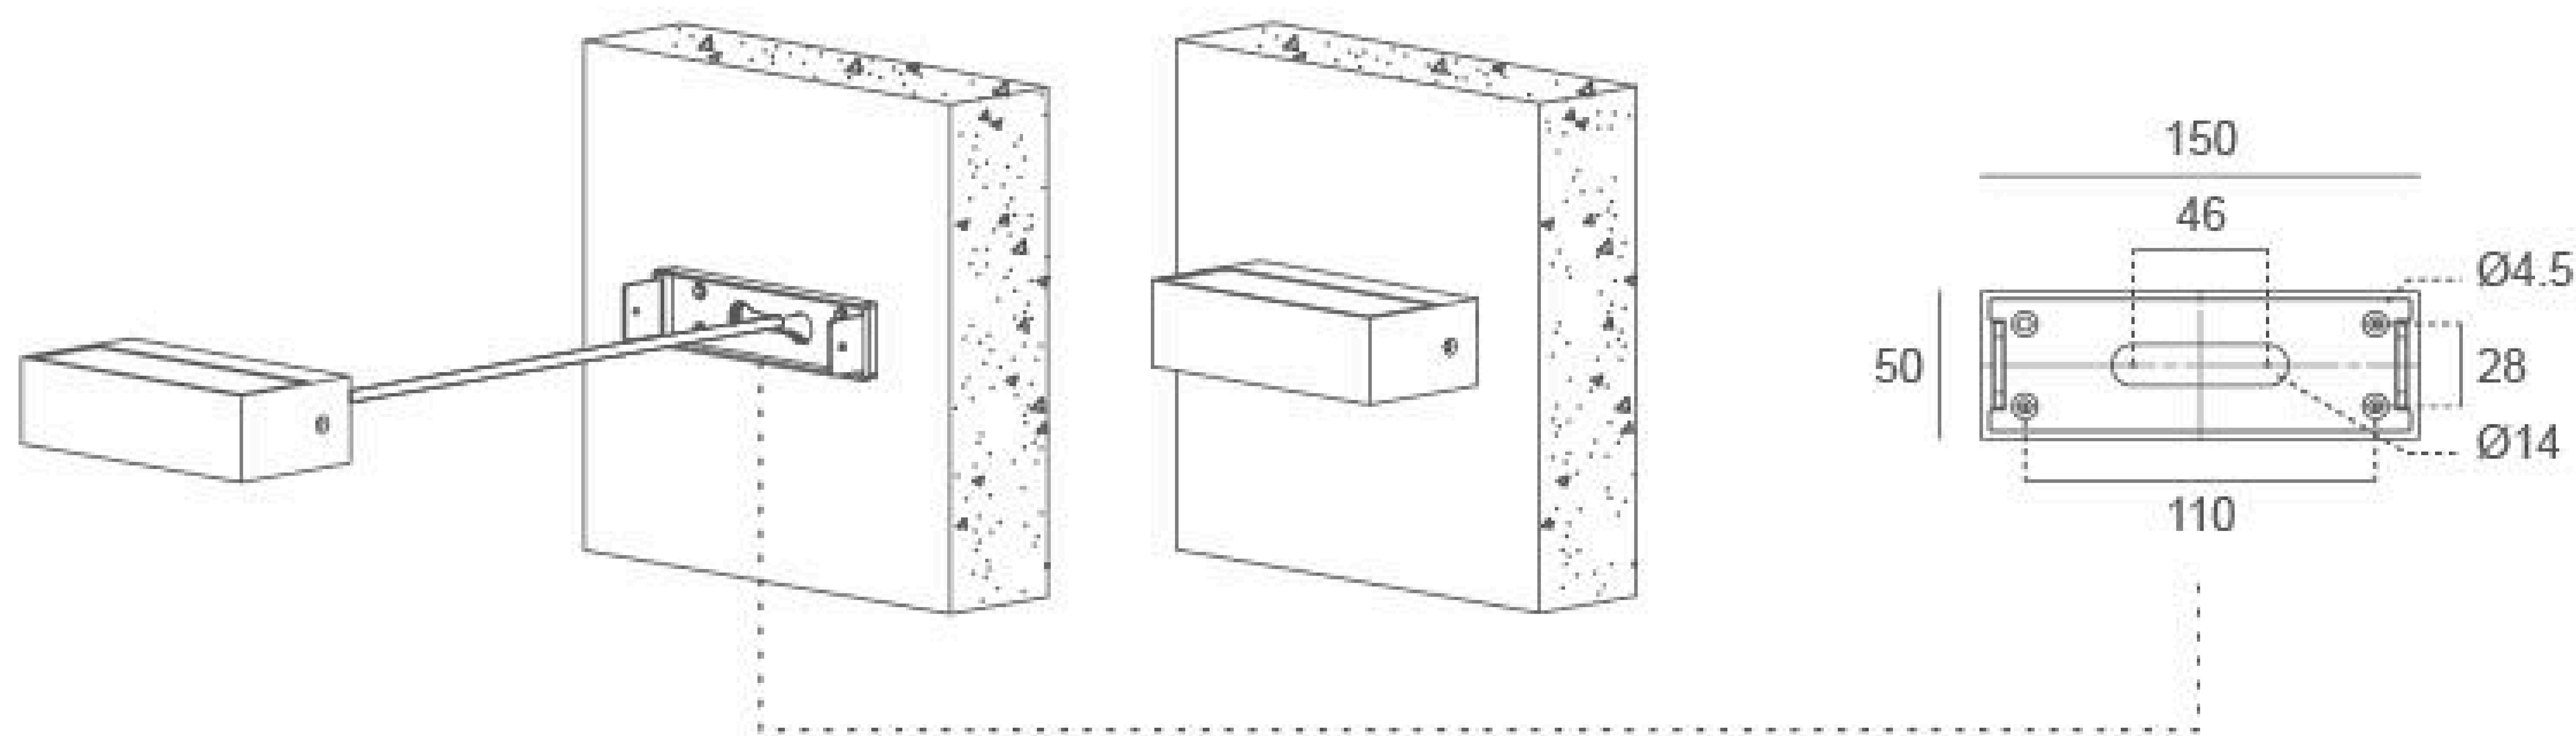

Photometric

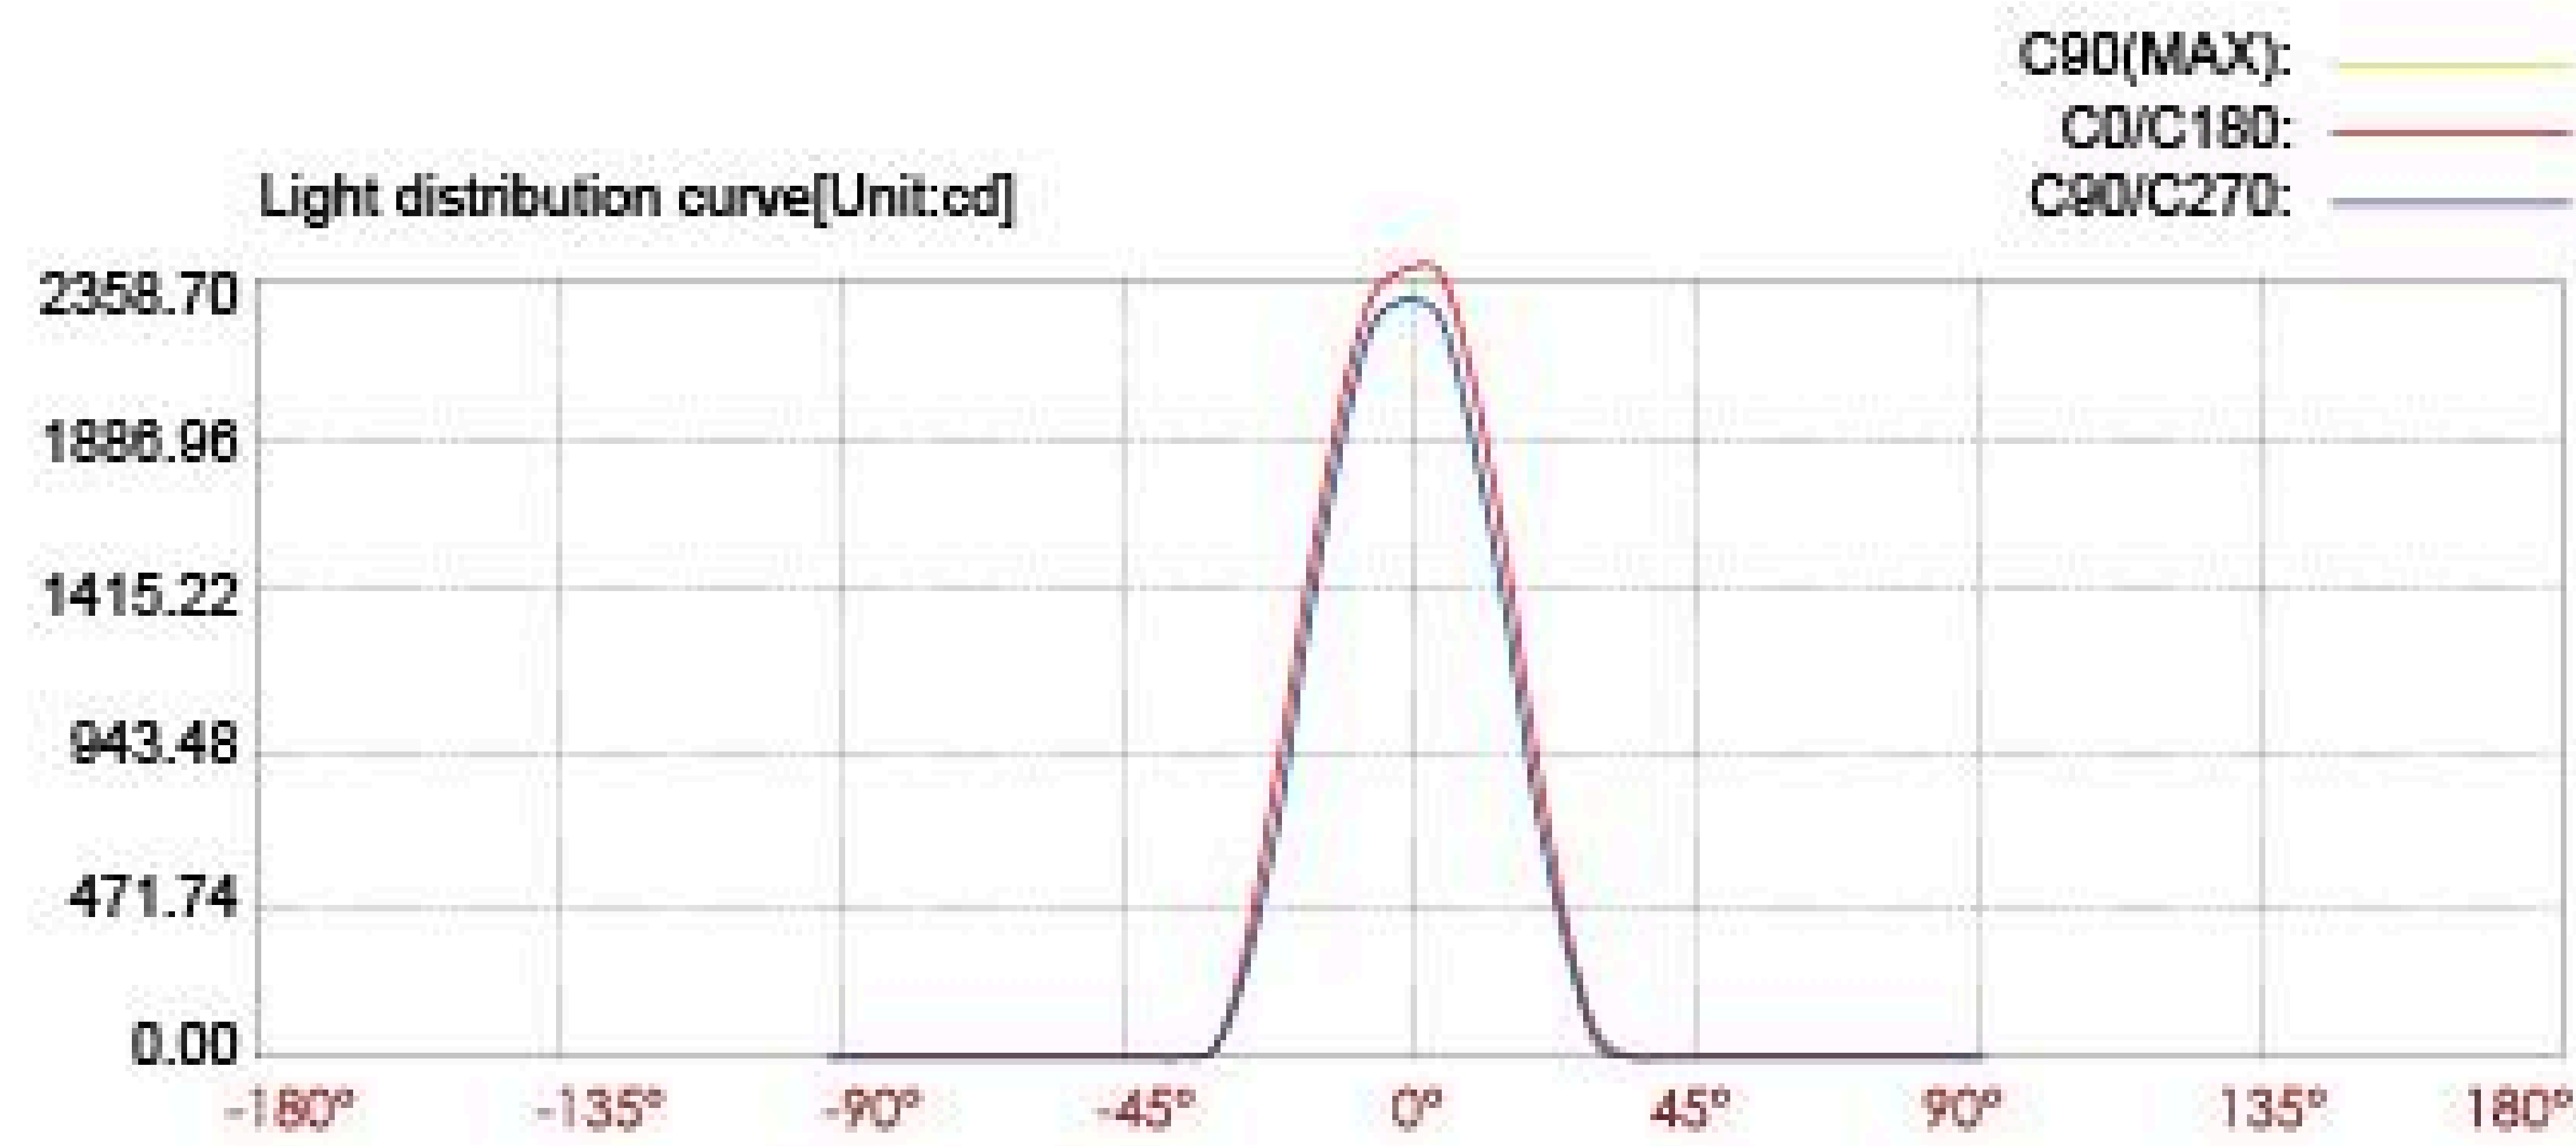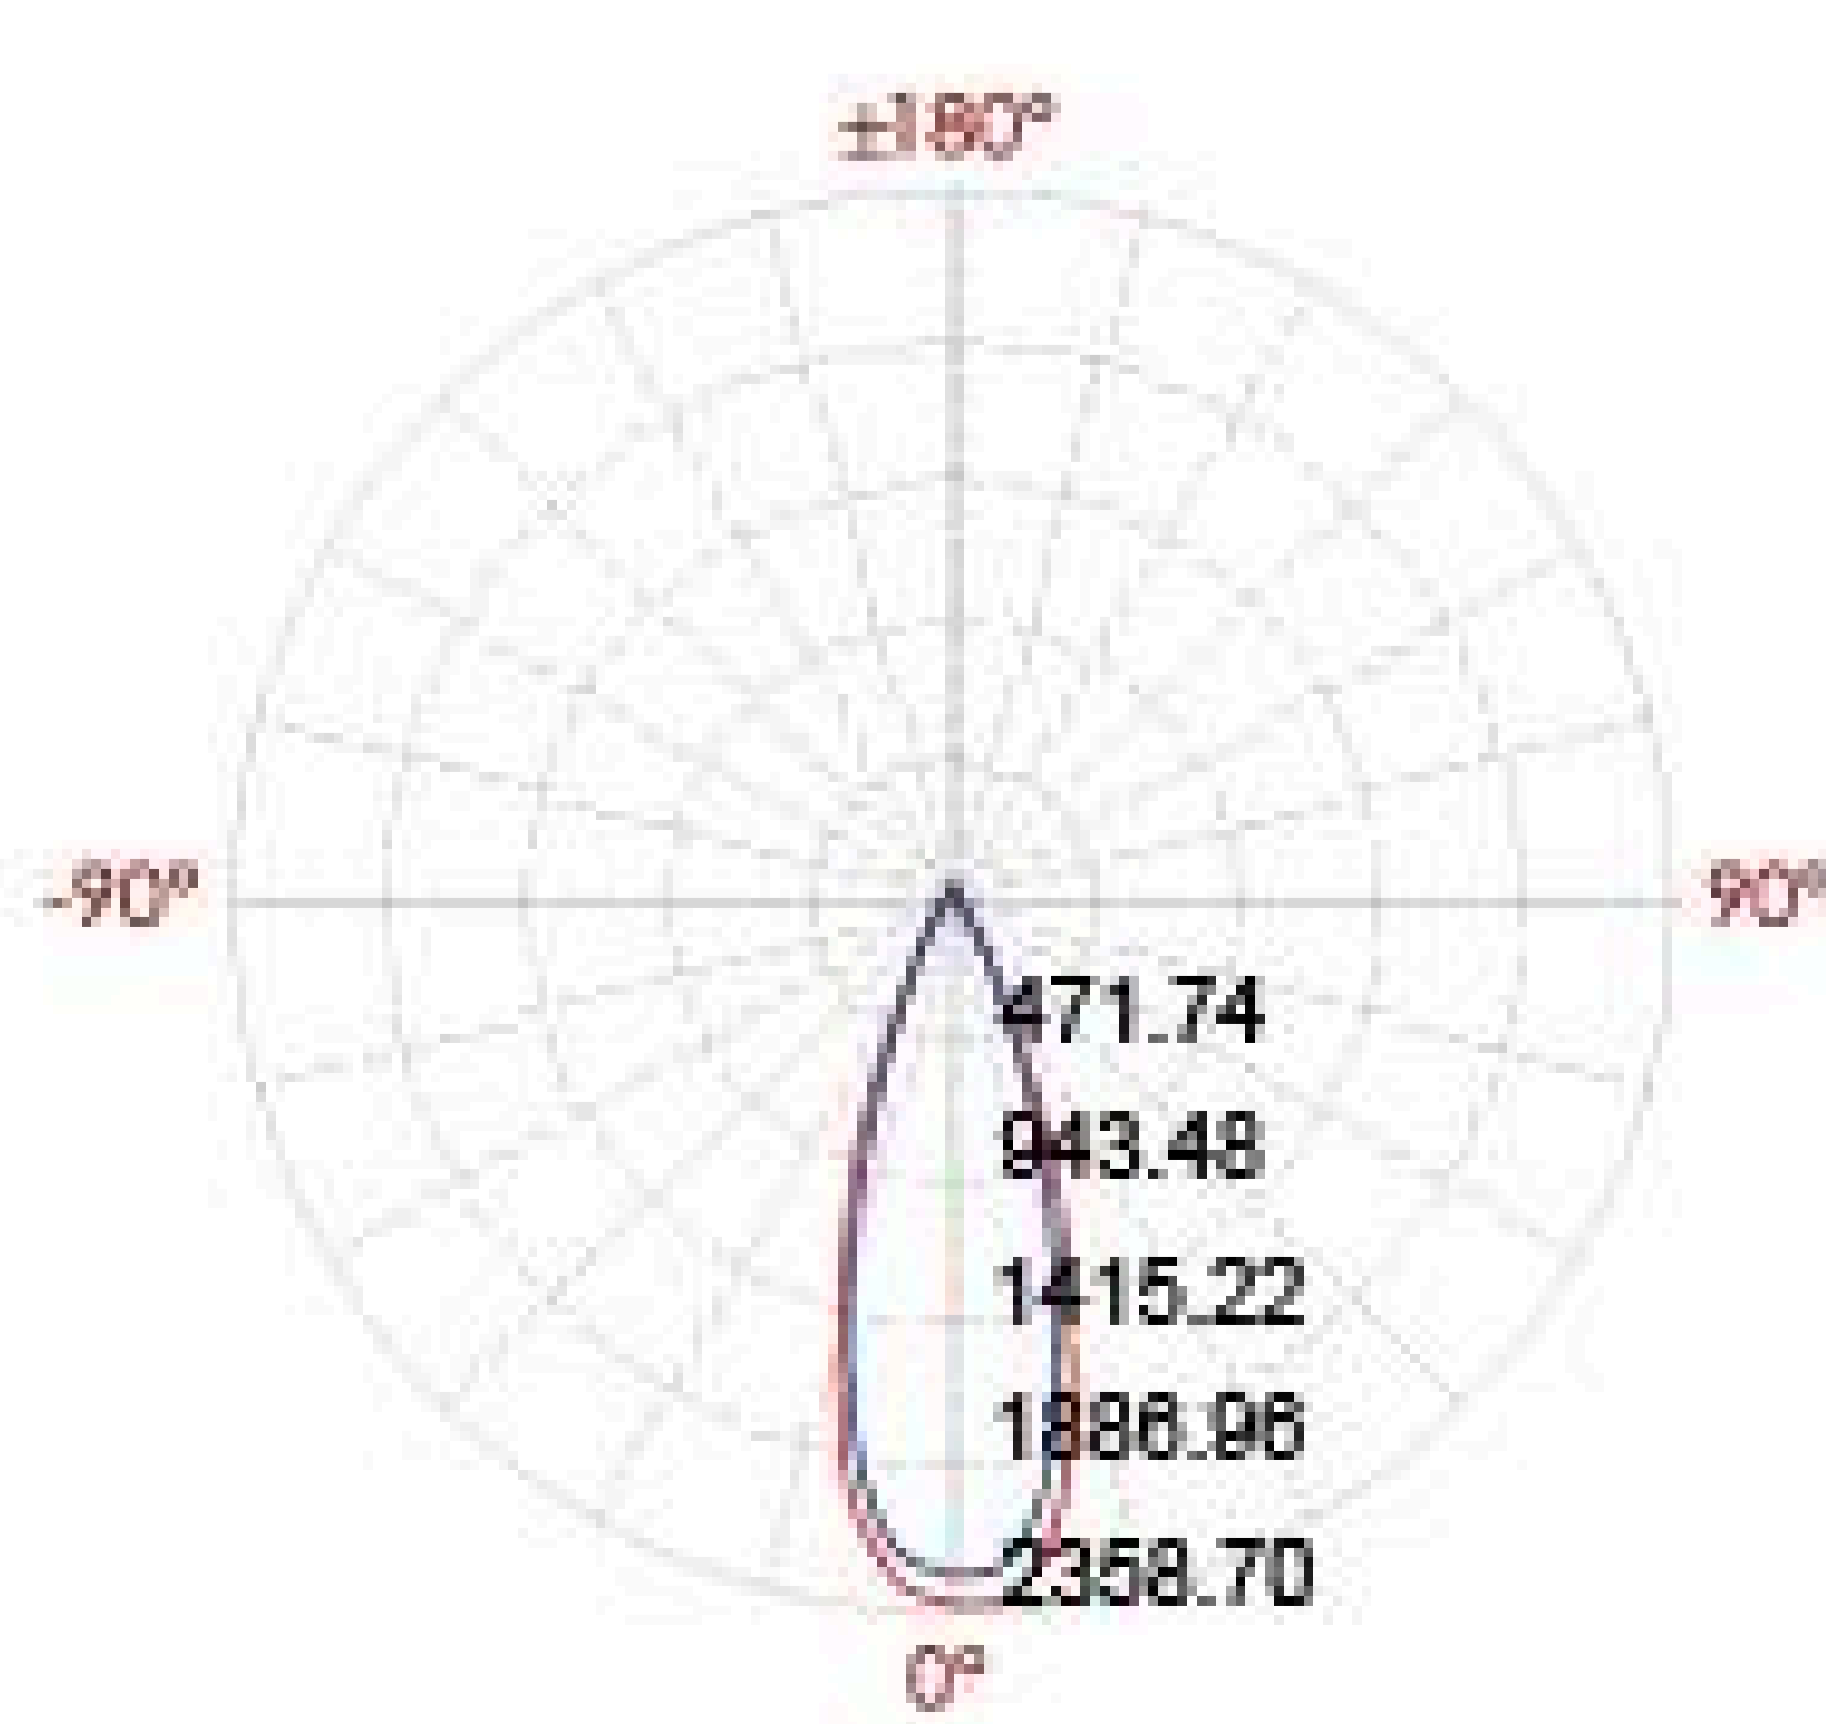

Lux distance curve

Center beam LUX	Beam width V	Beam width H
2m	589.67 LUX	1.3m 1.2m
4m	147.42 LUX	2.6m 2.4m
6m	65.52 LUX	3.8m 3.5m
8m	36.85 LUX	5.1m 4.7m
10m	23.59 LUX	6.4m 5.9m
12m	16.38 LUX	7.7m 7.1m

Ver.Spread:35.4 Horiz.Spread:32.6