

# 08VHB0126

Light Source	1x6W
Lens	B71
Selected Degree (°)θ1/2	60°
Input Voltage (V)	DC 24 AC 240
Operating Current (MA)	24V=330 240V=36
Consumption (W)	24V=7.9 240V=8
Luminance (LM)	240V=699
IK	08

## Specification

Housing	12# Die-casting aluminum powder coated
Painting	Powder coating, T= 60~80 μm. Adhesion of ISO class 1/ASTM class 4B
Lens	OPTICS reflector. efficiency≥85%
LED Type	COB
Power Cable	Outside of luminaire (Without waterstopper) H05RN-F 2×1.0mm <sup>2</sup> , L=0.3m(24V) H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m(240V)
Operating Temperature	-20°C~40°C

## Painting Color

Primary



Sanded Black  
RAL 9005

Secondary



Sanded Dark Grey  
KAP 7037




Sanded White  
RAL 9003




Sanded Bronze  
KAP 7008

## Photometric

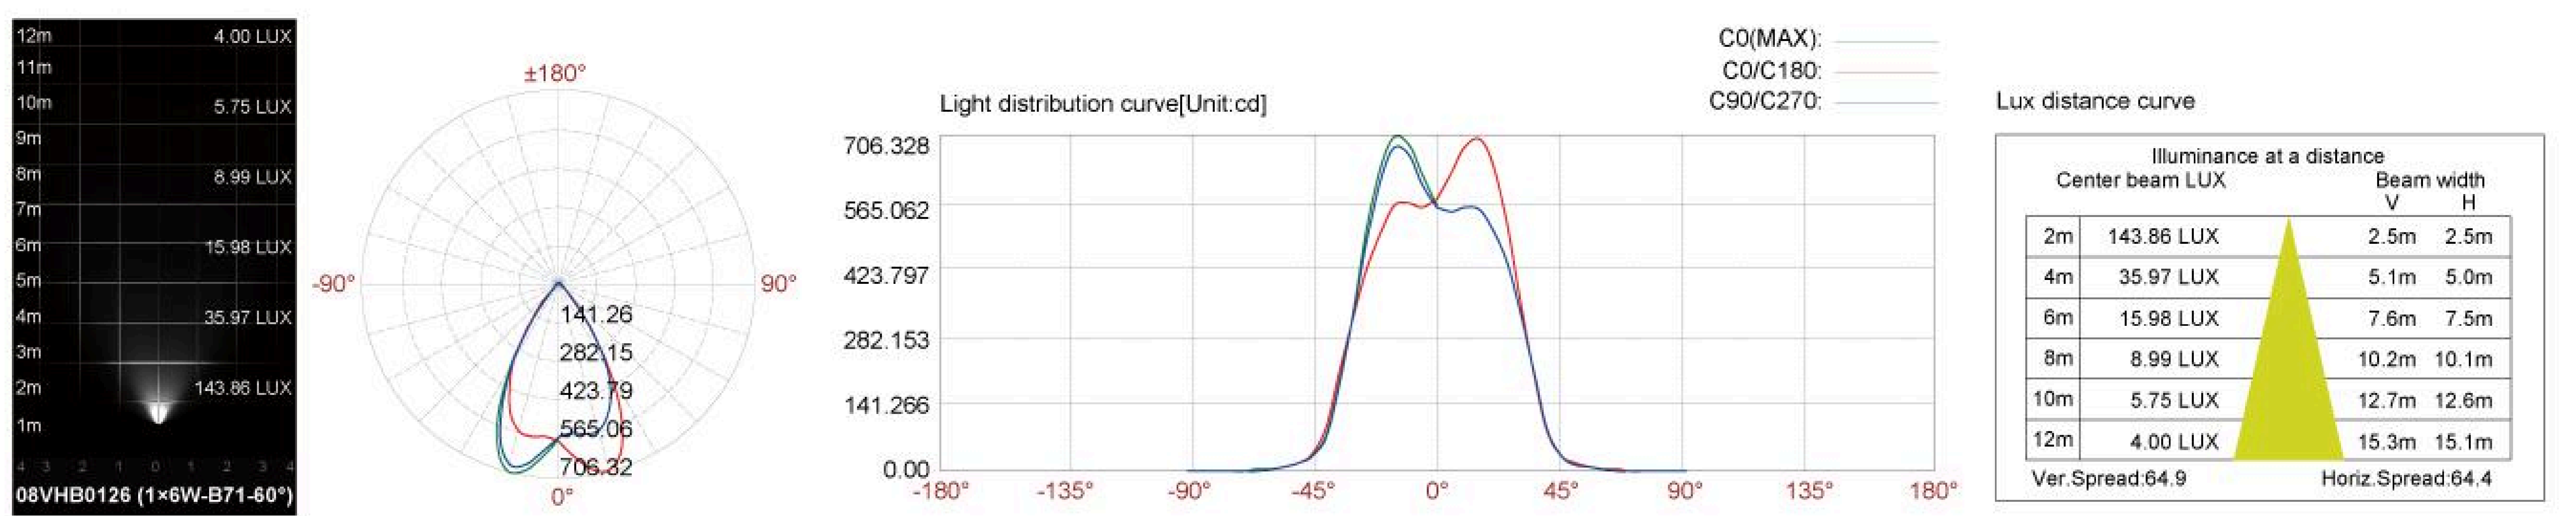

## Linear Drawing

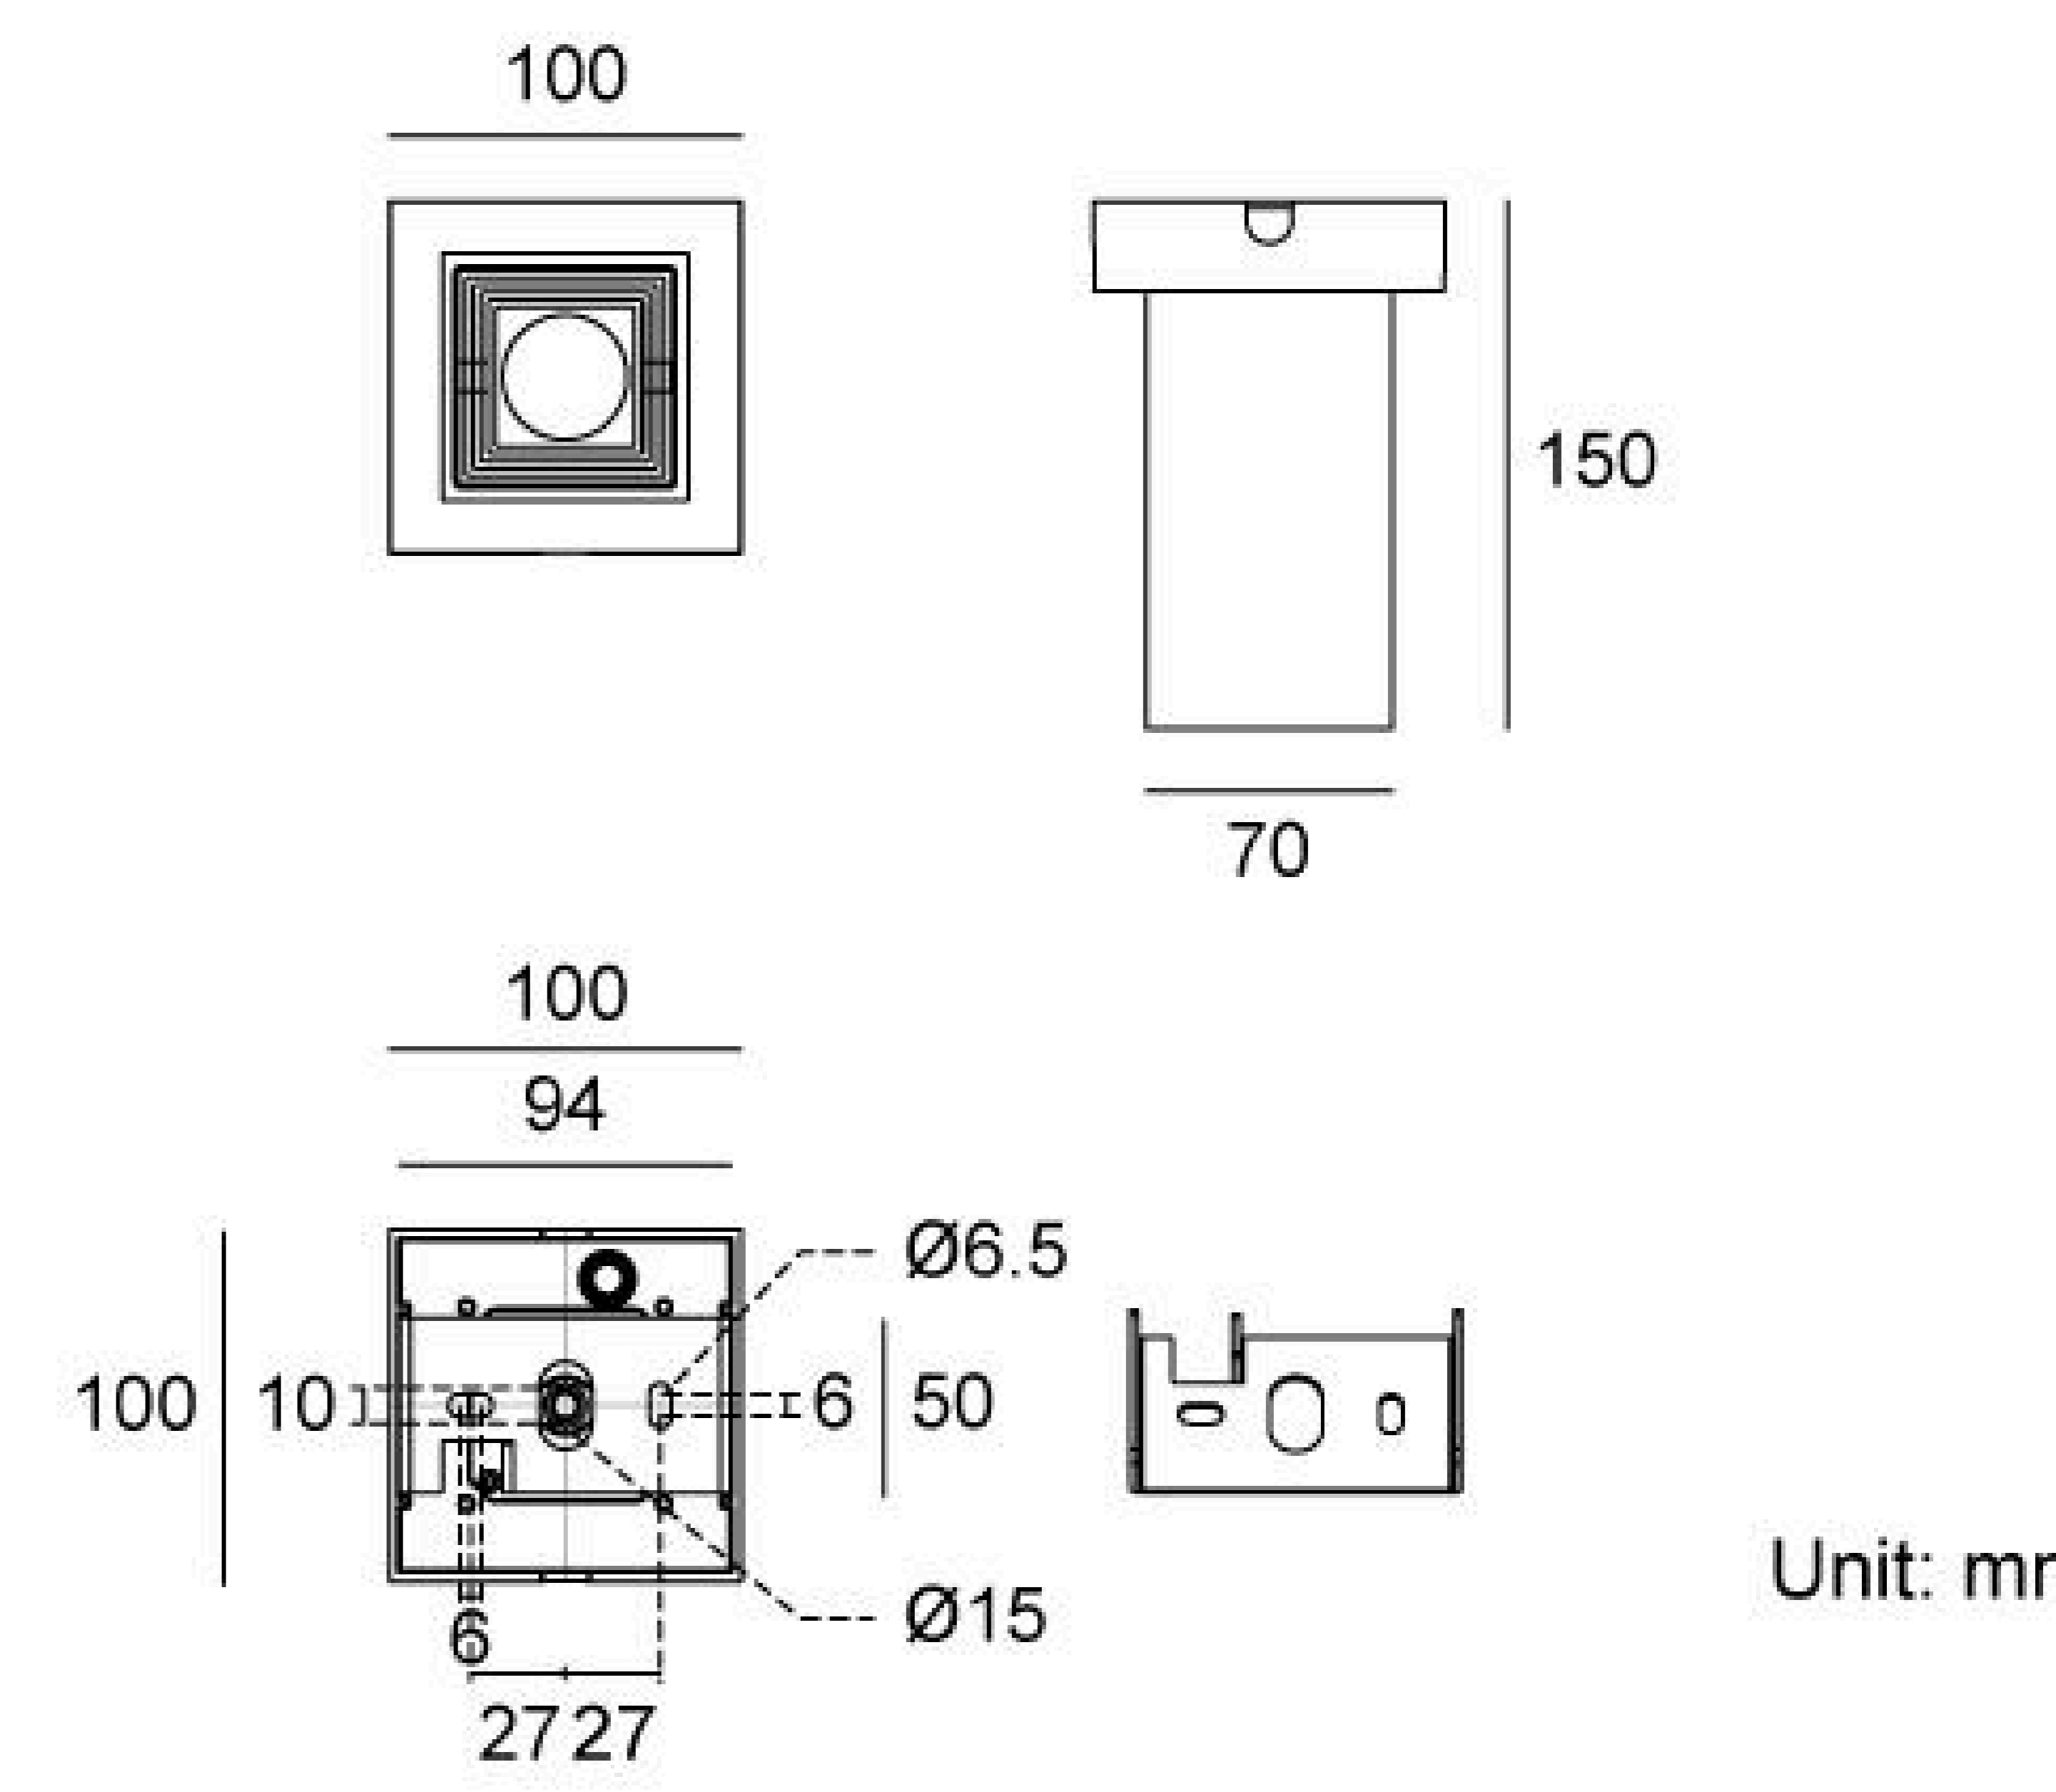

## Lens (Item Code) Referenced Degree(°)θ1/2



15° 24° 33° 45° 60°

B71

## Features



**Safety hook**

Hook at the fixator for safer wiring, leave the hook for protection.