


09AFLD1234

Linear Drawing

Height (mm)	300
Light Source	12x0.5W
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=250 120V=60 240V=35
Consumption (W)	24V=6 120V=7 240V=7
Luminance (LM)	VVV=168
IK	07

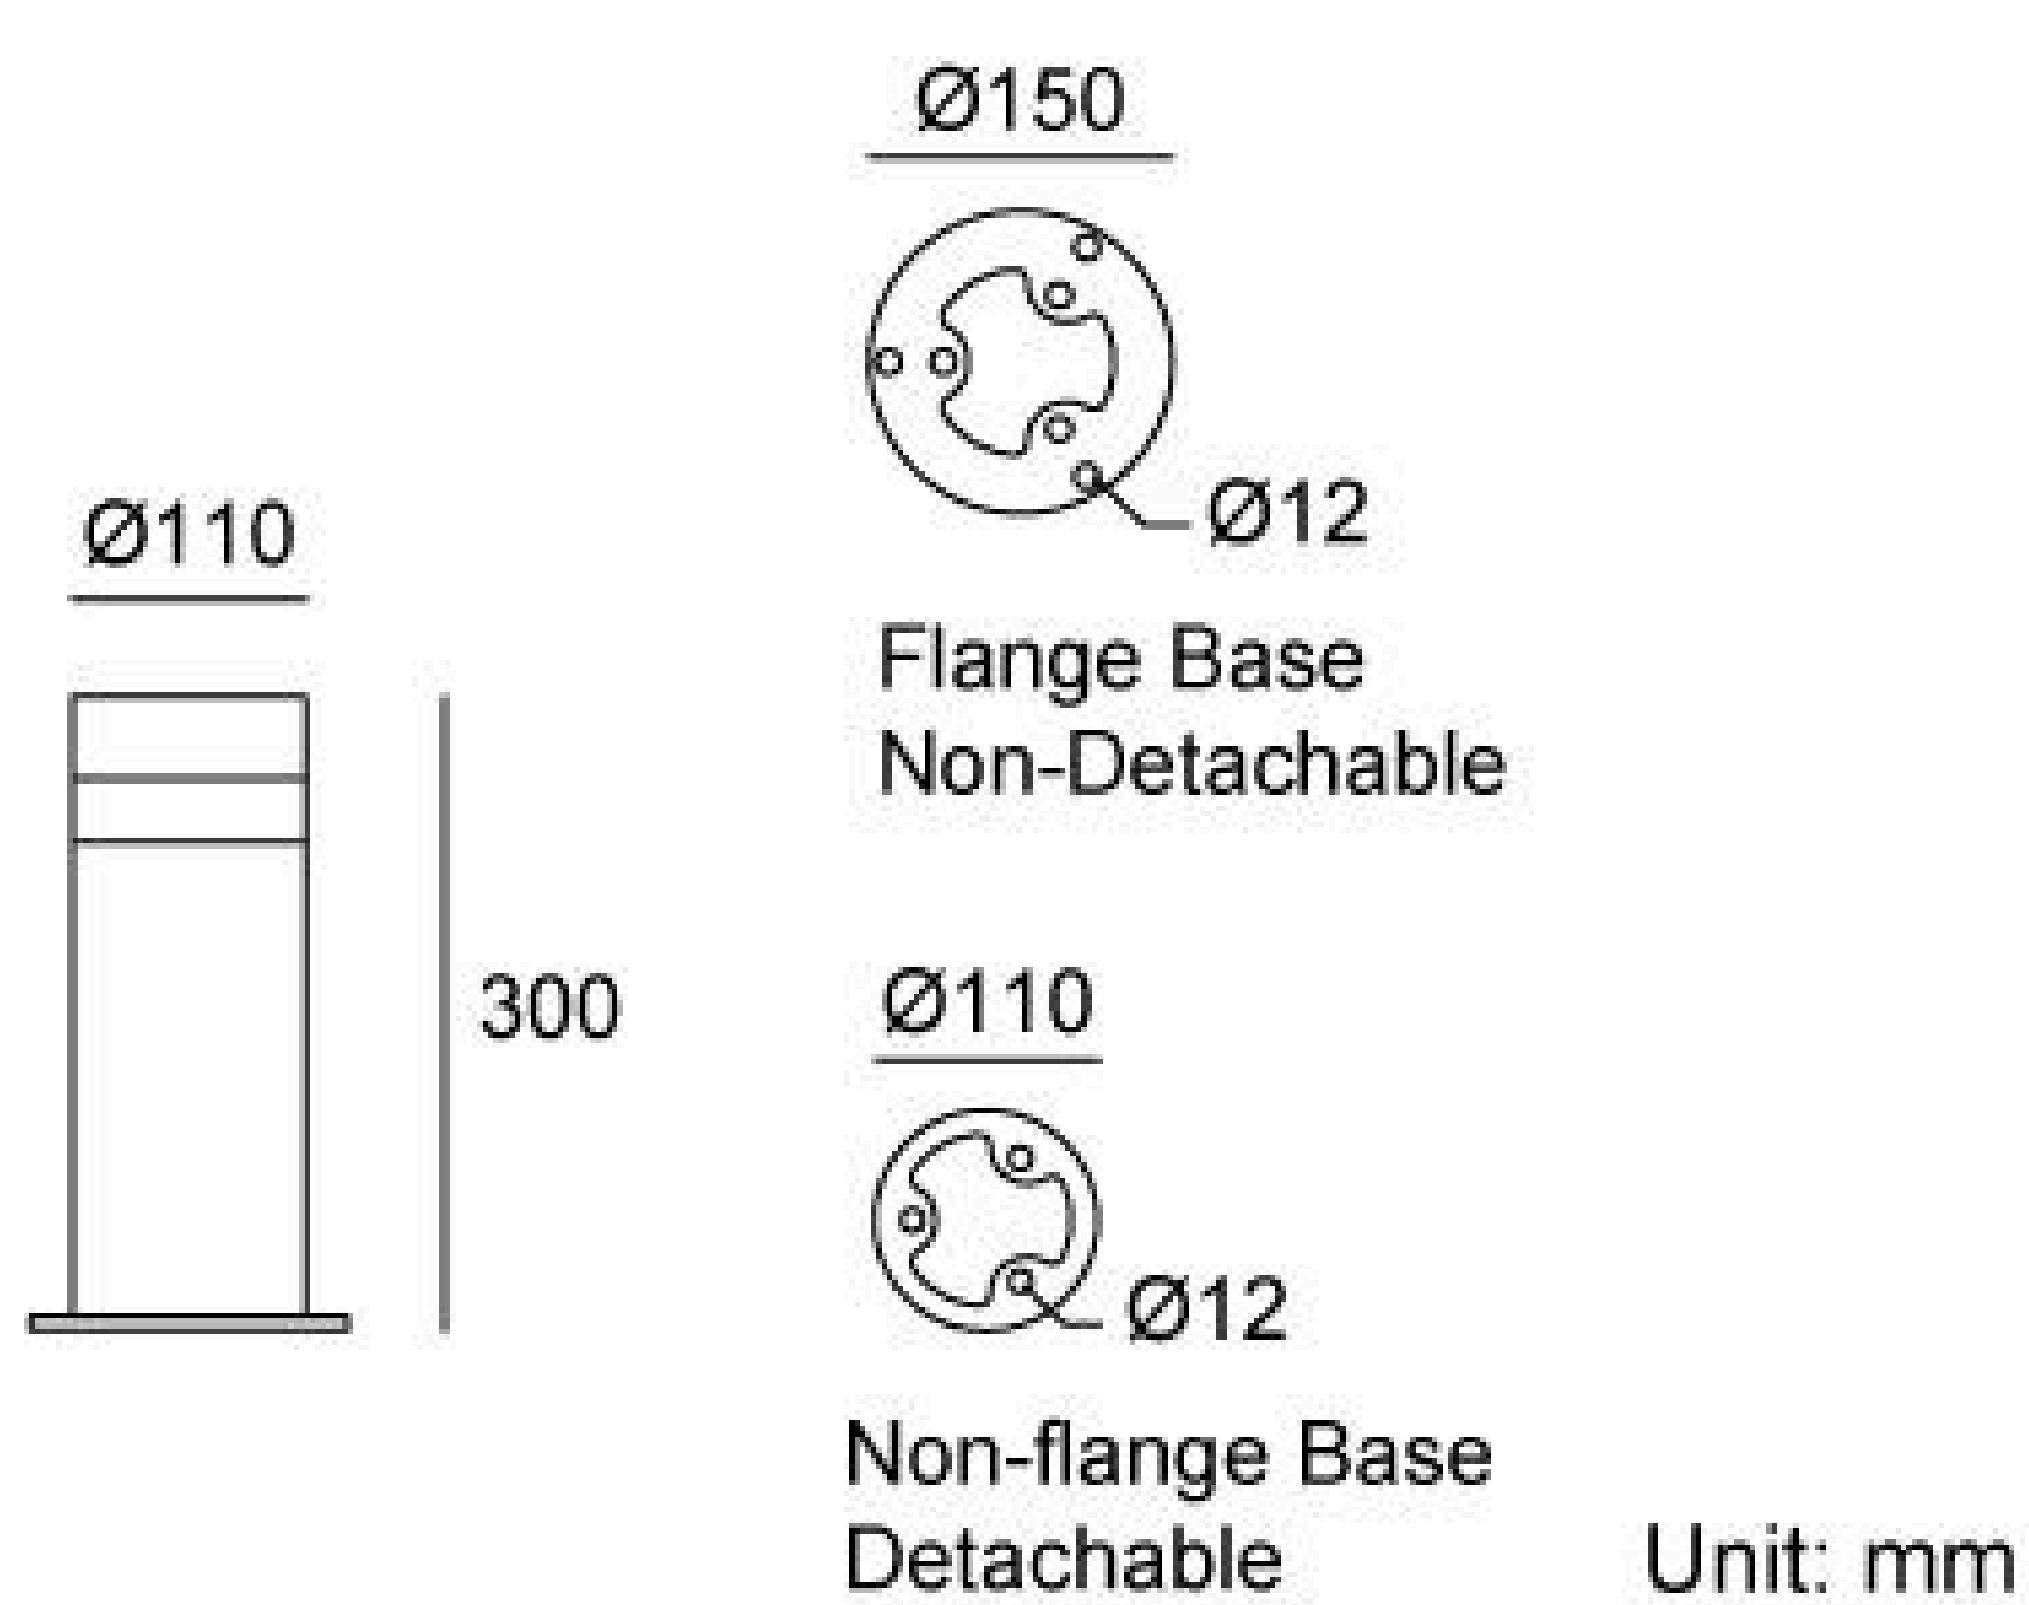

Specification

Housing	12# Die-casting aluminum powder coated. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	PMMA
LED Type	SMD
LED Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.5m 120V/240V: H05RN-F 3×1.0mm ² , L=0.5m
Base	Flange base
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary





Secondary



Base Options

Source Mounting Base	Inground Base (Optional)	Ground Anchor Base (Optional)
<p>Type A Flange Base Non-Detachable</p>	<p>JC3001</p>	<p>22A</p> <p>Installation steps (Optional)</p>
<p>Type B Non-flange Base Detachable</p>	<p>JC3002</p>	<p>25A</p> <p>Installation steps (Optional)</p>

Beam Demo

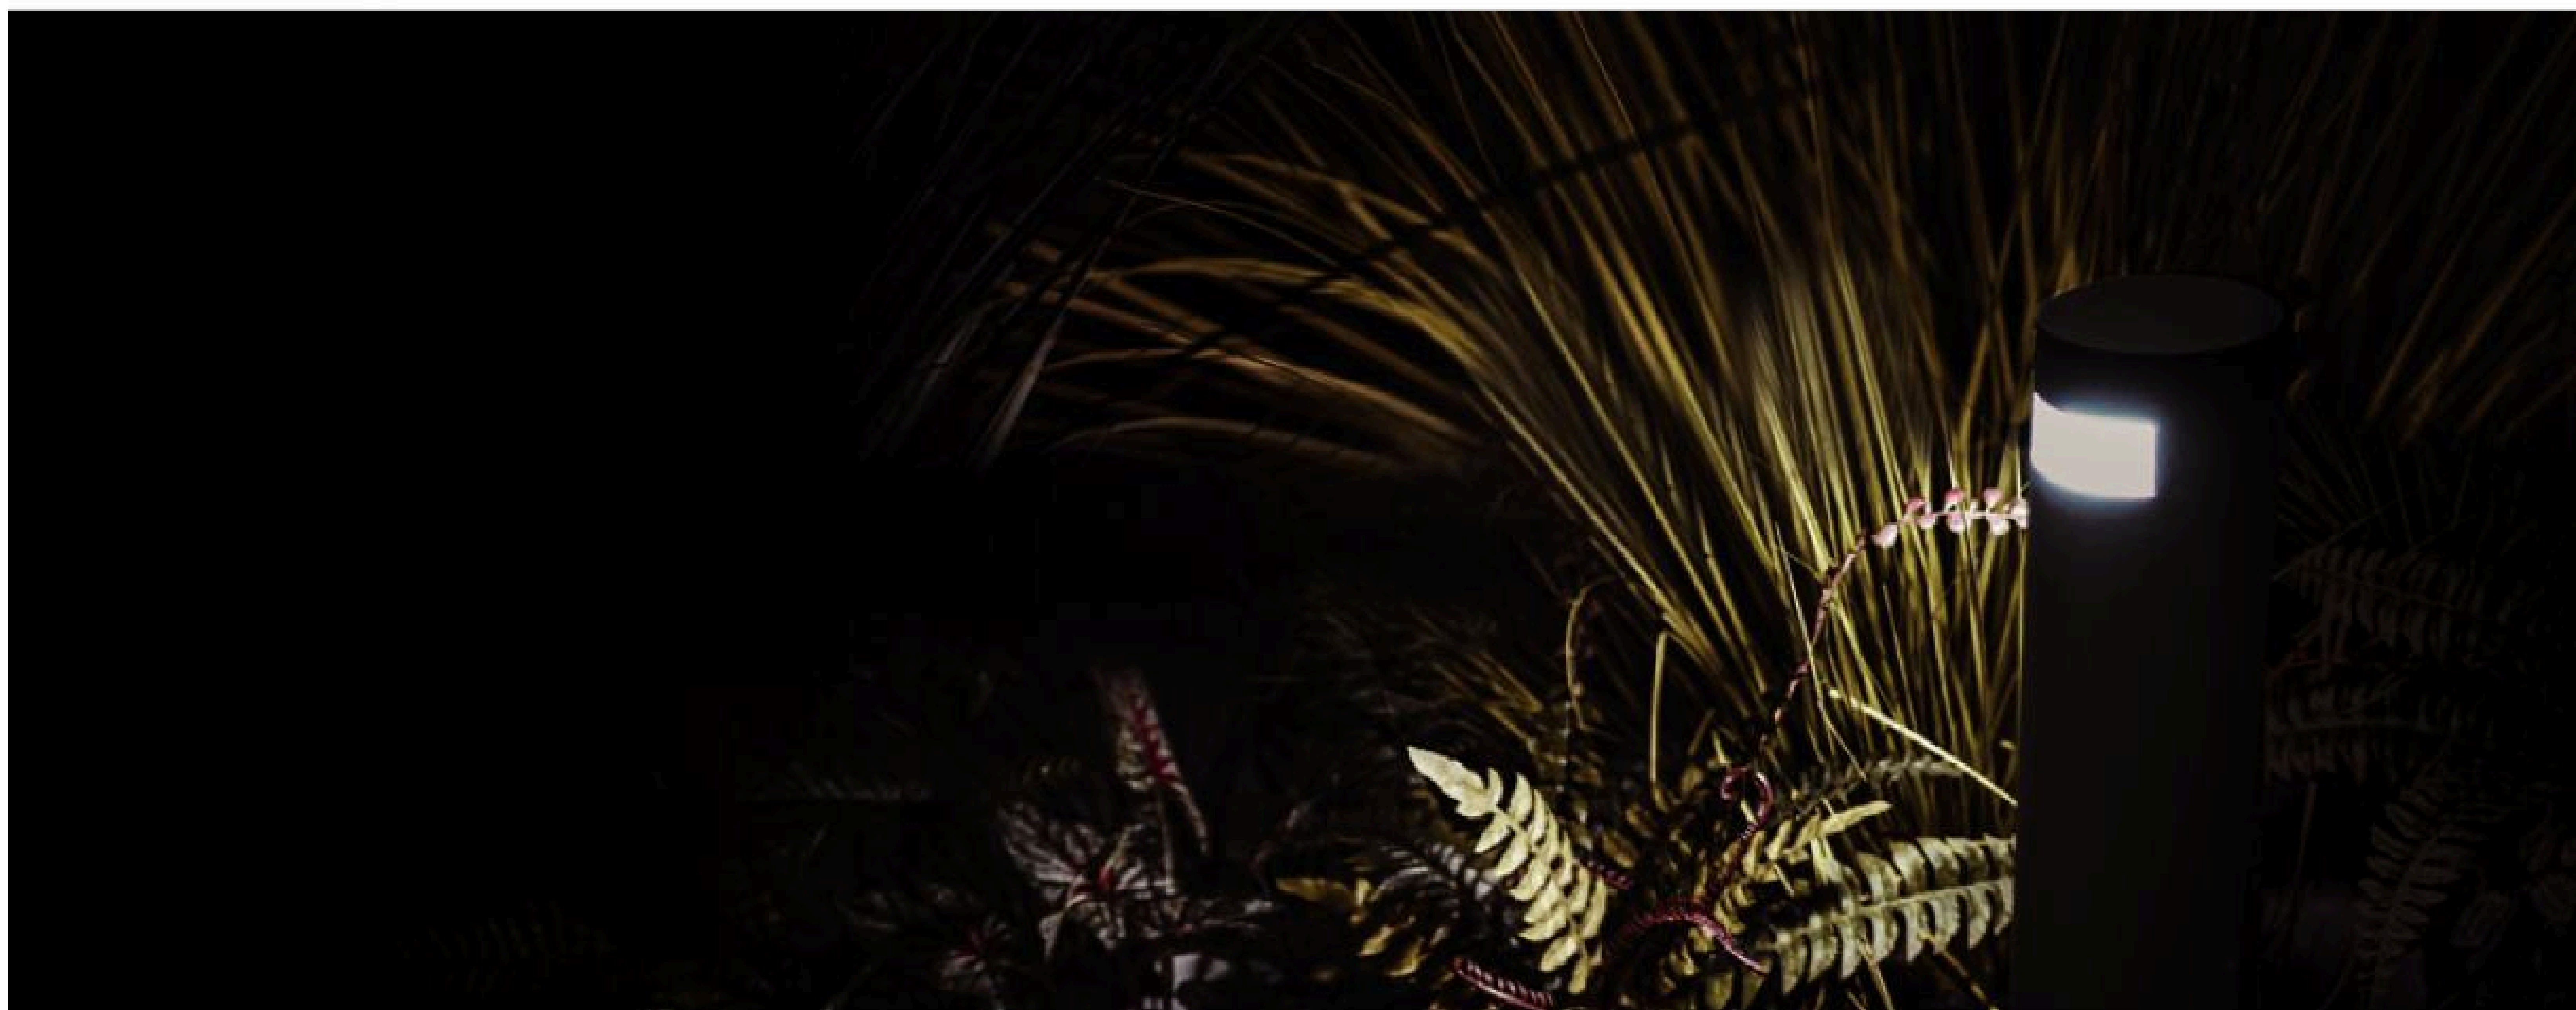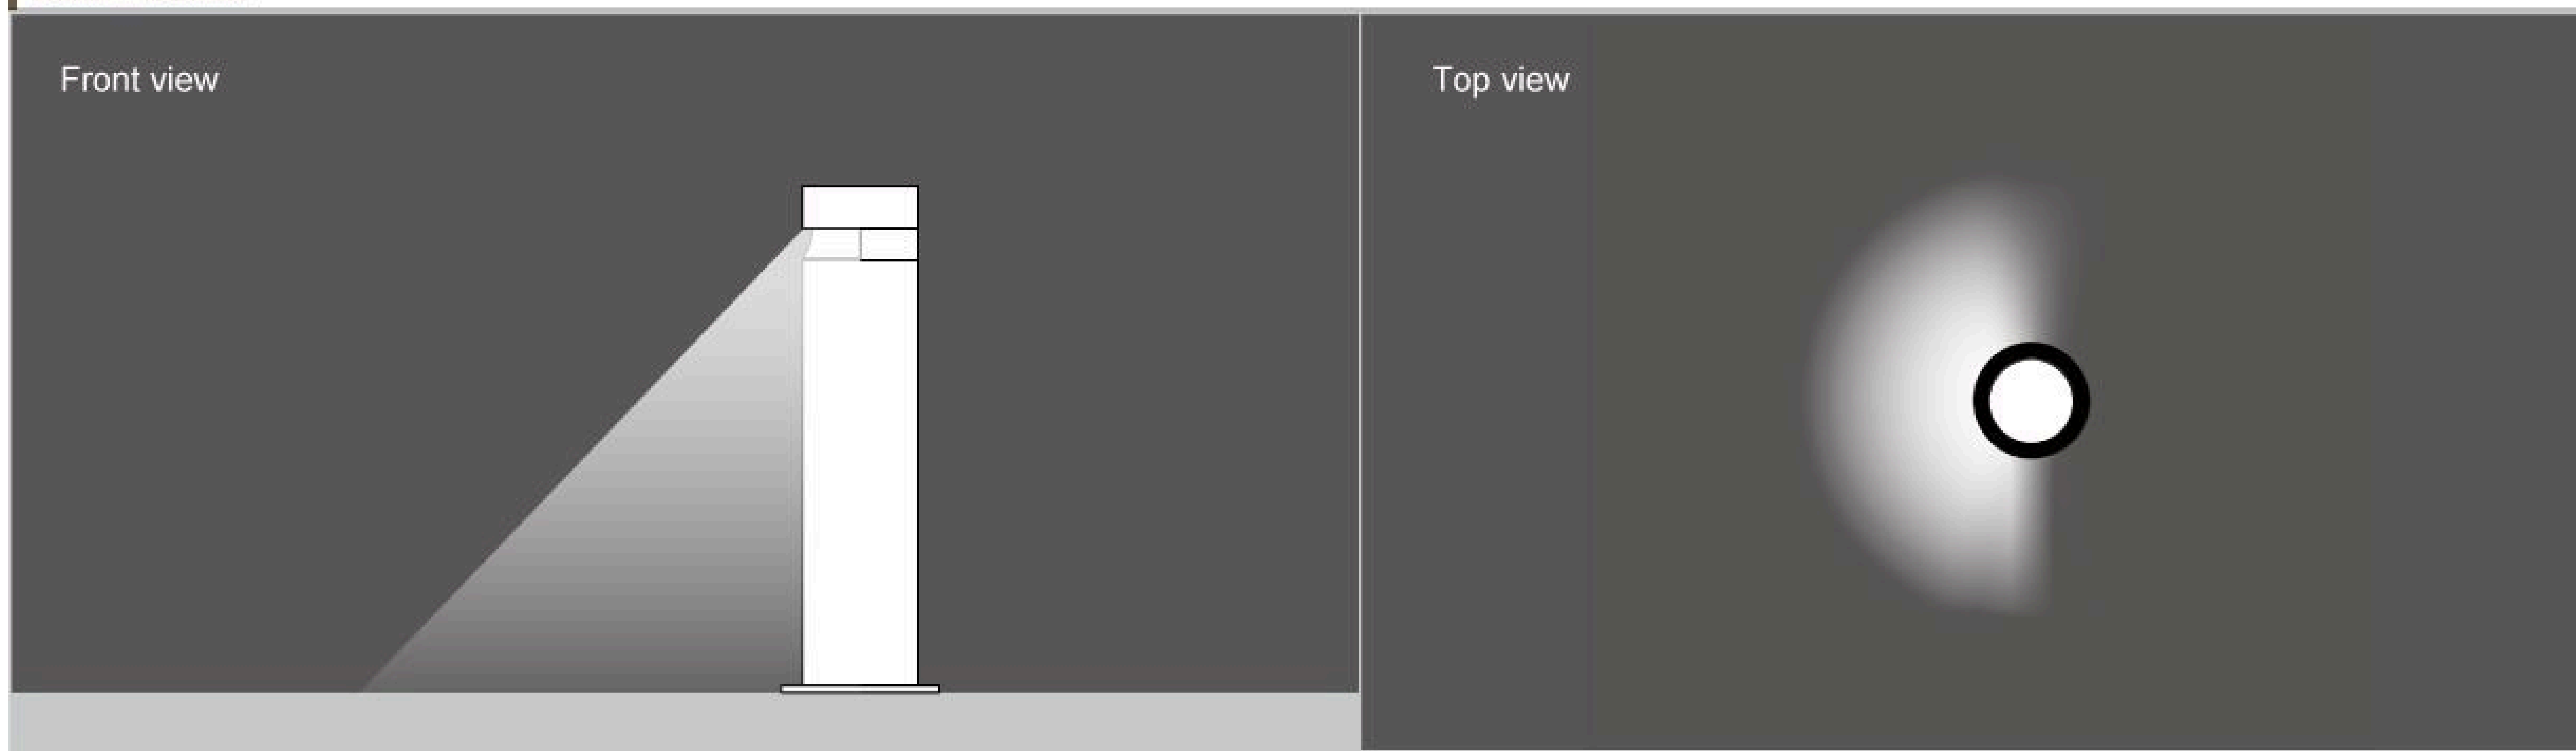

Photometric

