


09AFLD2434

Linear Drawing

Height (mm)	300
Light Source	24x0.25W
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=250 120V=60 240V=35
Consumption (W)	24V=6 120V=7 240V=7
Luminance (LM)	WW=214
IK	07

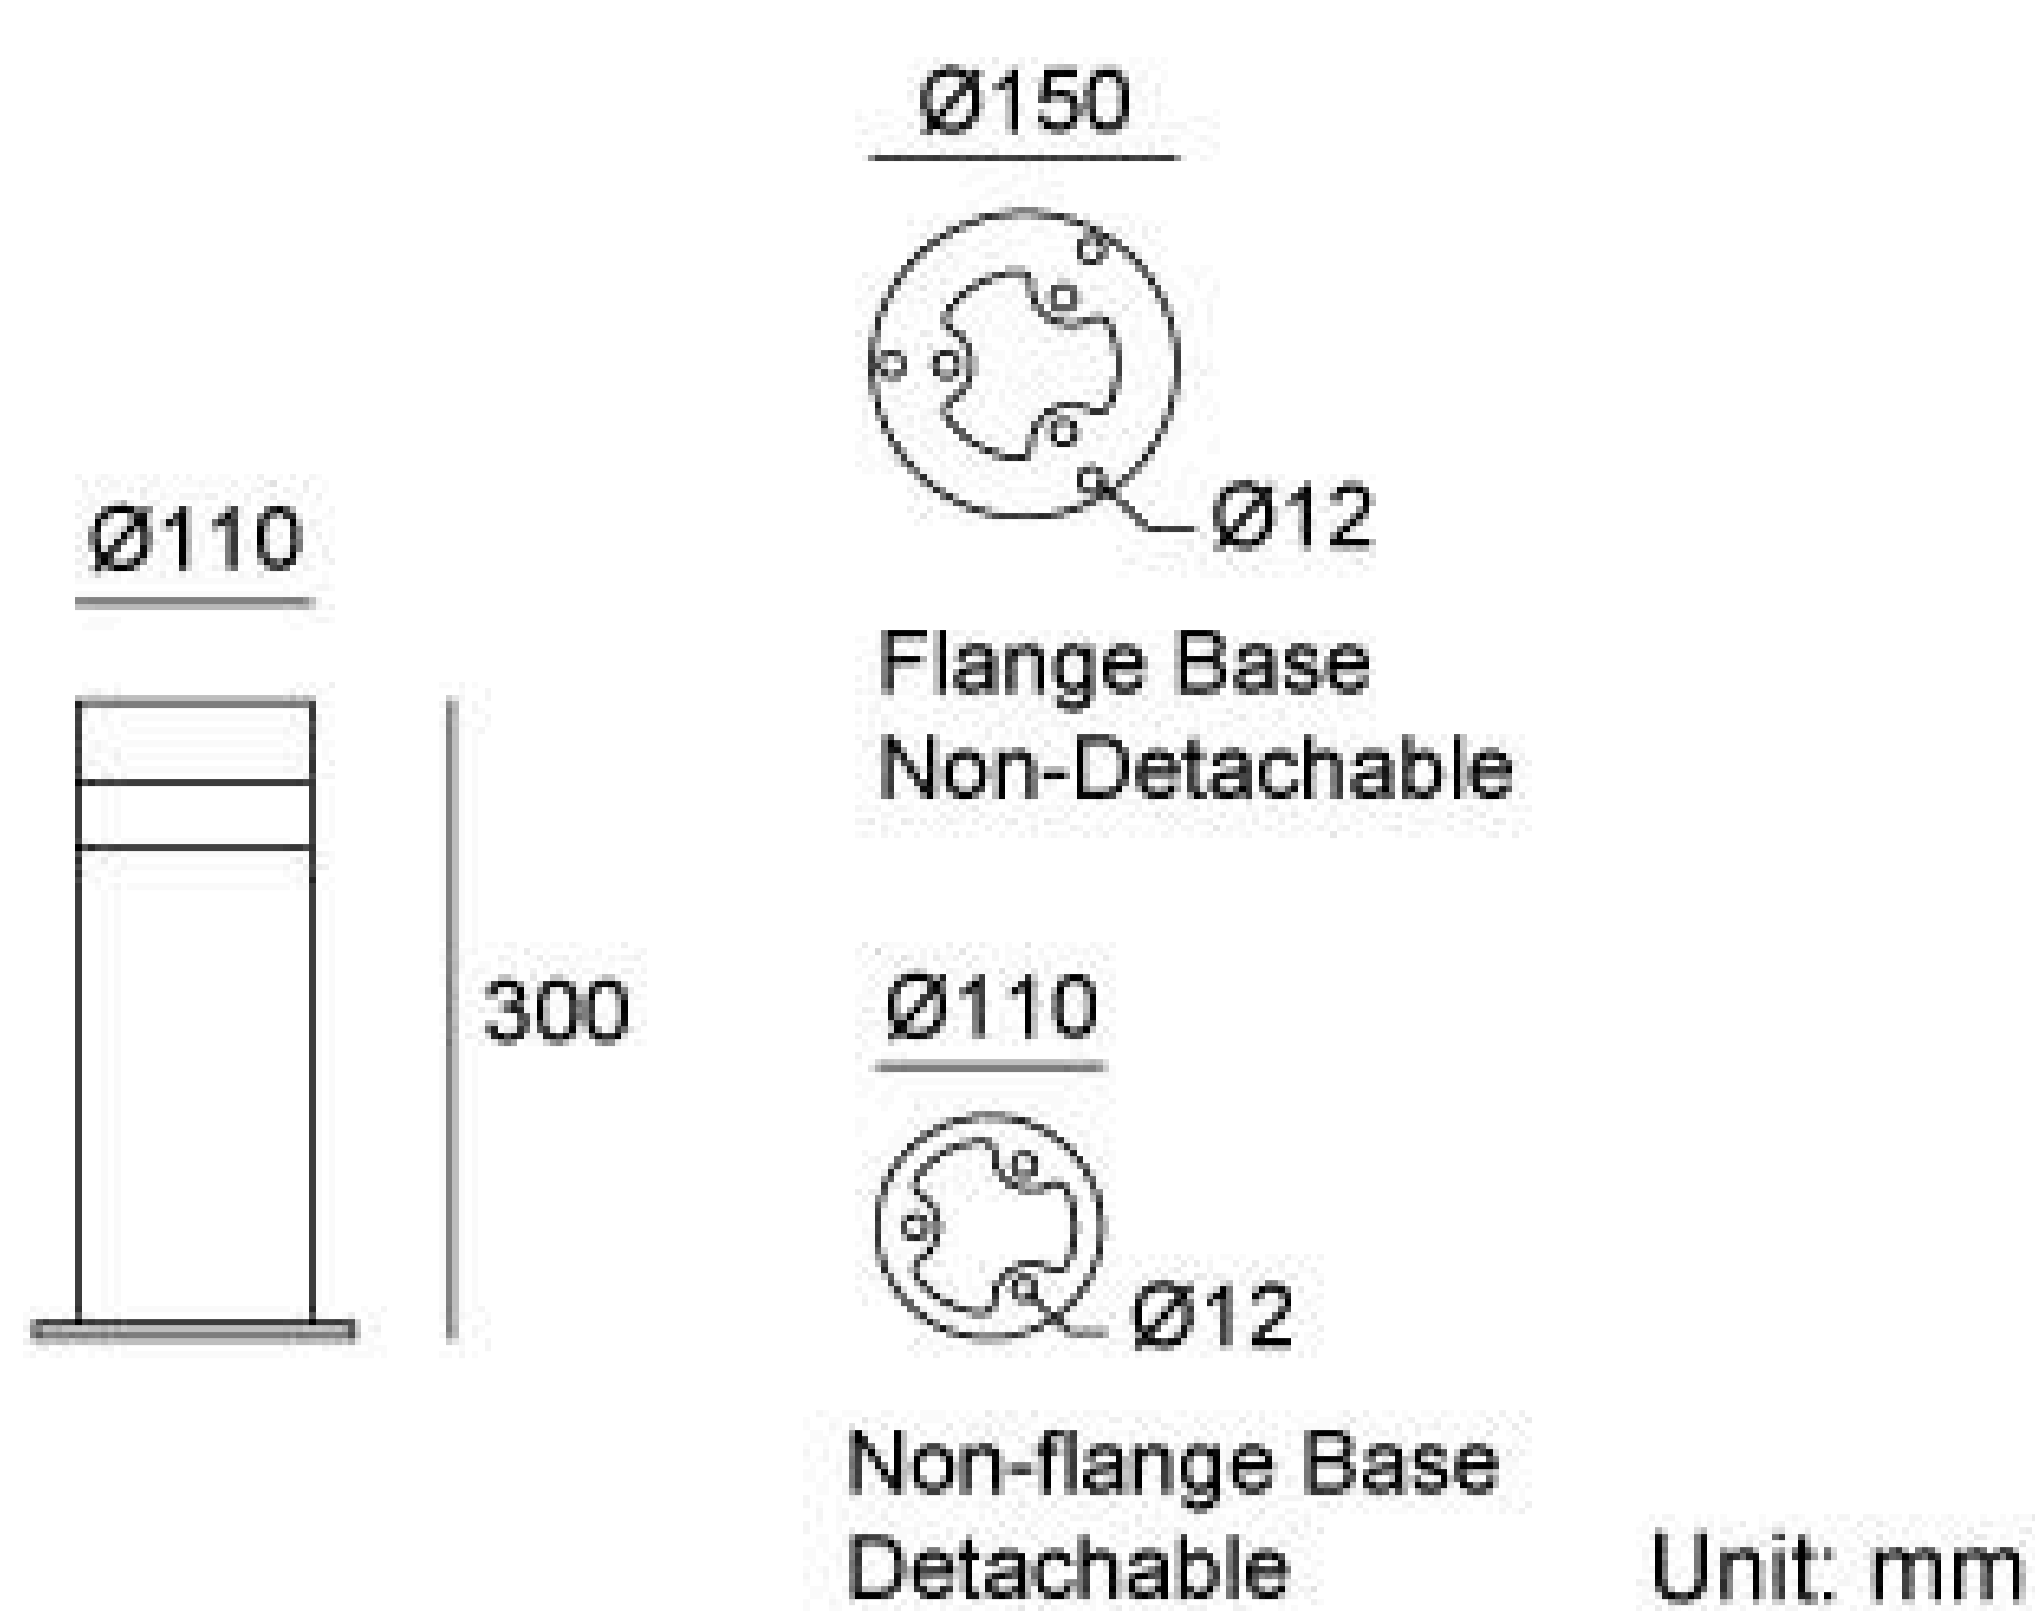

Specification

Housing	12# Die-casting aluminum powder coated. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	PMMA
LED Type	SMD
LED Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm ² , L=0.5m 120V/240V: H05RN-F 3×1.0mm ² , L=0.5m
Base	Flange base
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary

Sanded Black
RAL 9005

Secondary


Sanded Dark Grey
KAP 7037

Sanded Bronze
KAP 7008

Base Options

Source Mounting Base	Inground Base (Optional)	Ground Anchor Base (Optional)
<p>Type A Flange Base Non-Detachable</p>	<p>JC3001</p>	<p>22A</p> <p>Installation steps (Optional)</p>
<p>Type B Non-flange Base Detachable</p>	<p>JC3002</p>	<p>25A</p> <p>Installation steps (Optional)</p>

Beam Demo

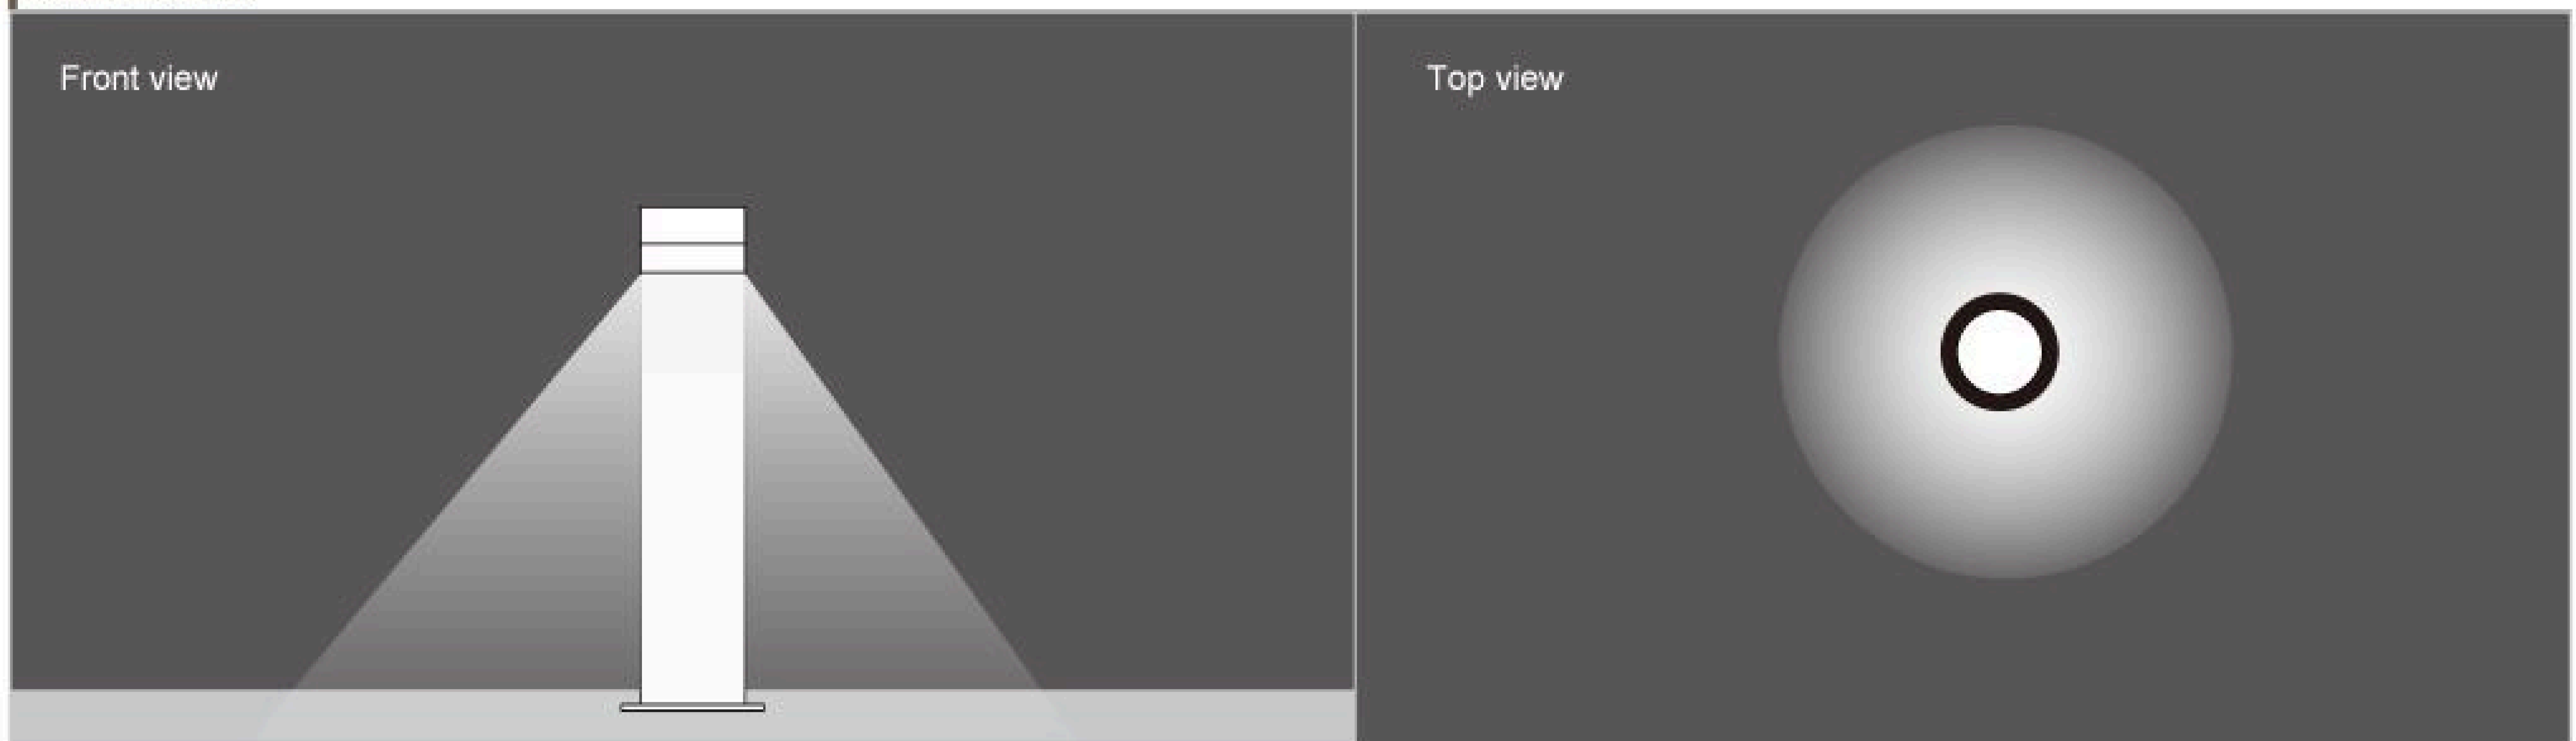

Photometric

