


09AFMD2434

Linear Drawing


| | |
|------------------------|-------------------------|
| Height (mm) | 550 |
| Light Source | 24x0.25W |
| Input Voltage (V) | DC 24 AC 120 240 |
| Operating Current (MA) | 24V=250 120V=60 240V=35 |
| Consumption (W) | 24V=6 120V=7 240V=7 |
| Luminance (LM) | WW=214 |
| IK | 07 |

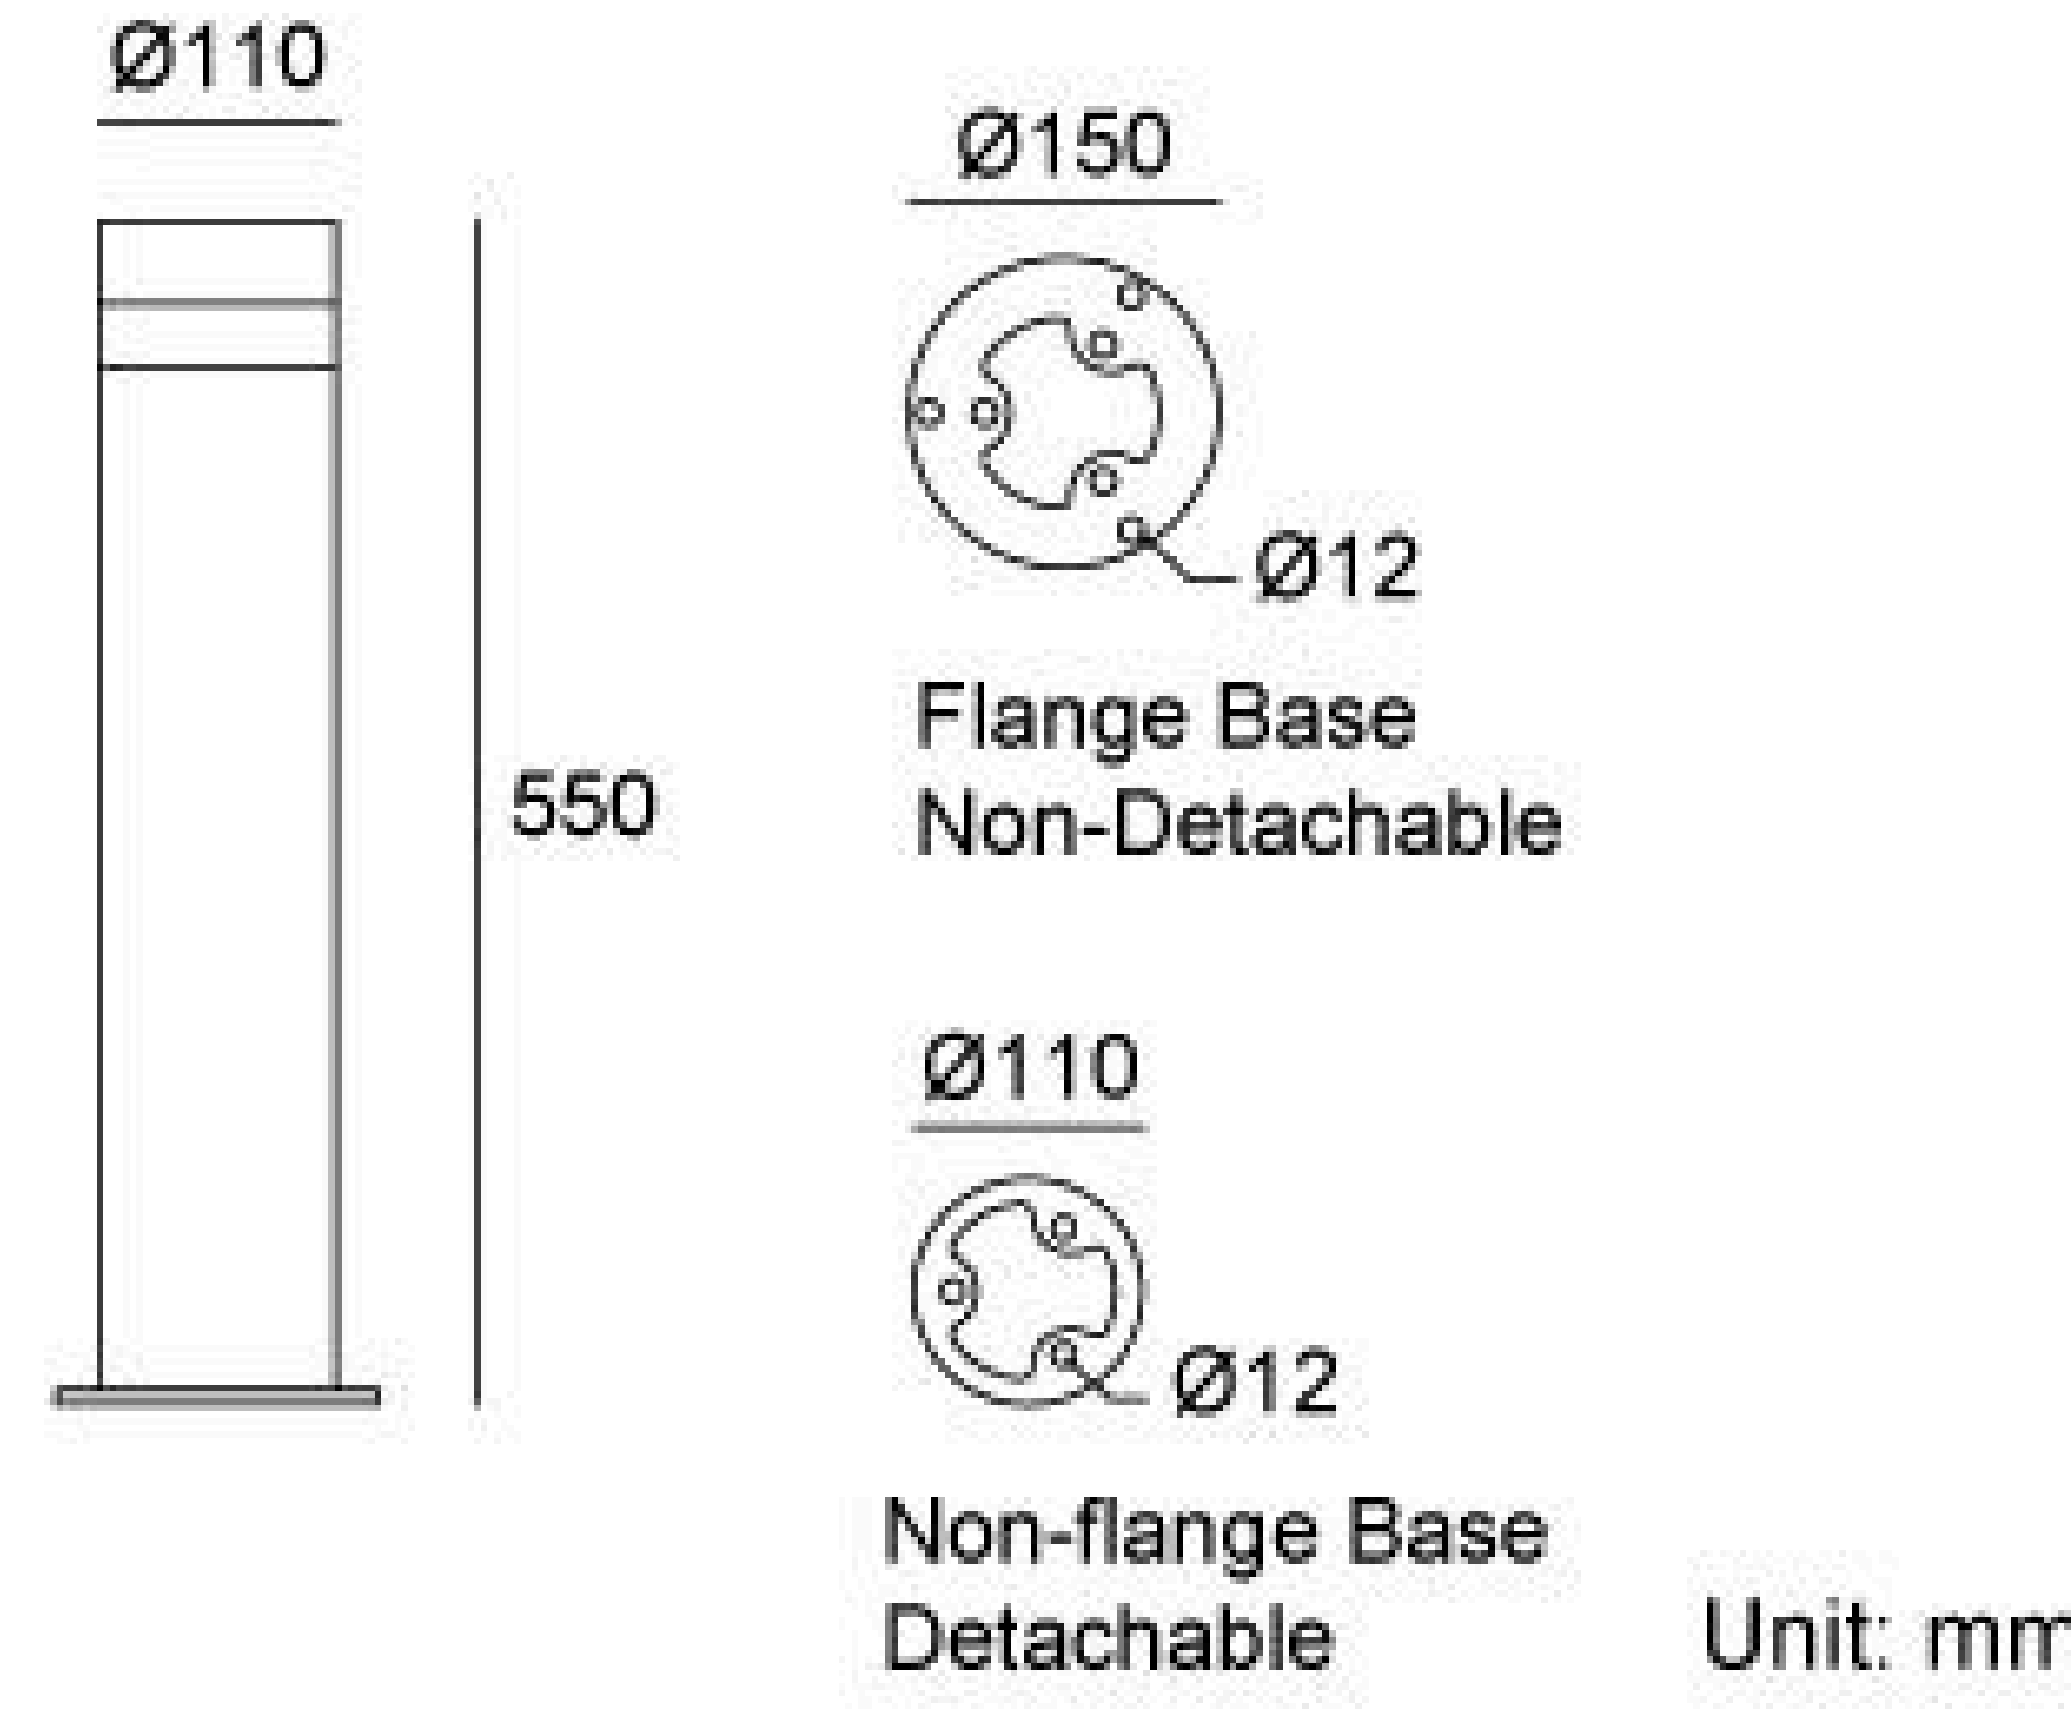

Specification

| | |
|-----------------------|---|
| Housing | 12# Die-casting aluminum powder coated. T=60-80µm Adhesion of ISO class 1/ASTM class 4B |
| Light Window | PMMA |
| LED Type | SMD |
| LED Driver | Built in on/off driver |
| Operating Temperature | -20°C~40°C |
| Power Cable | Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.5m 120V/240V: H05RN-F 3×1.0mm², L=0.5m |
| Base | Flange base |
| Dimming Support | External DALI supported TRIAC,0-10V, PWM via external driver on request |


Painting Color

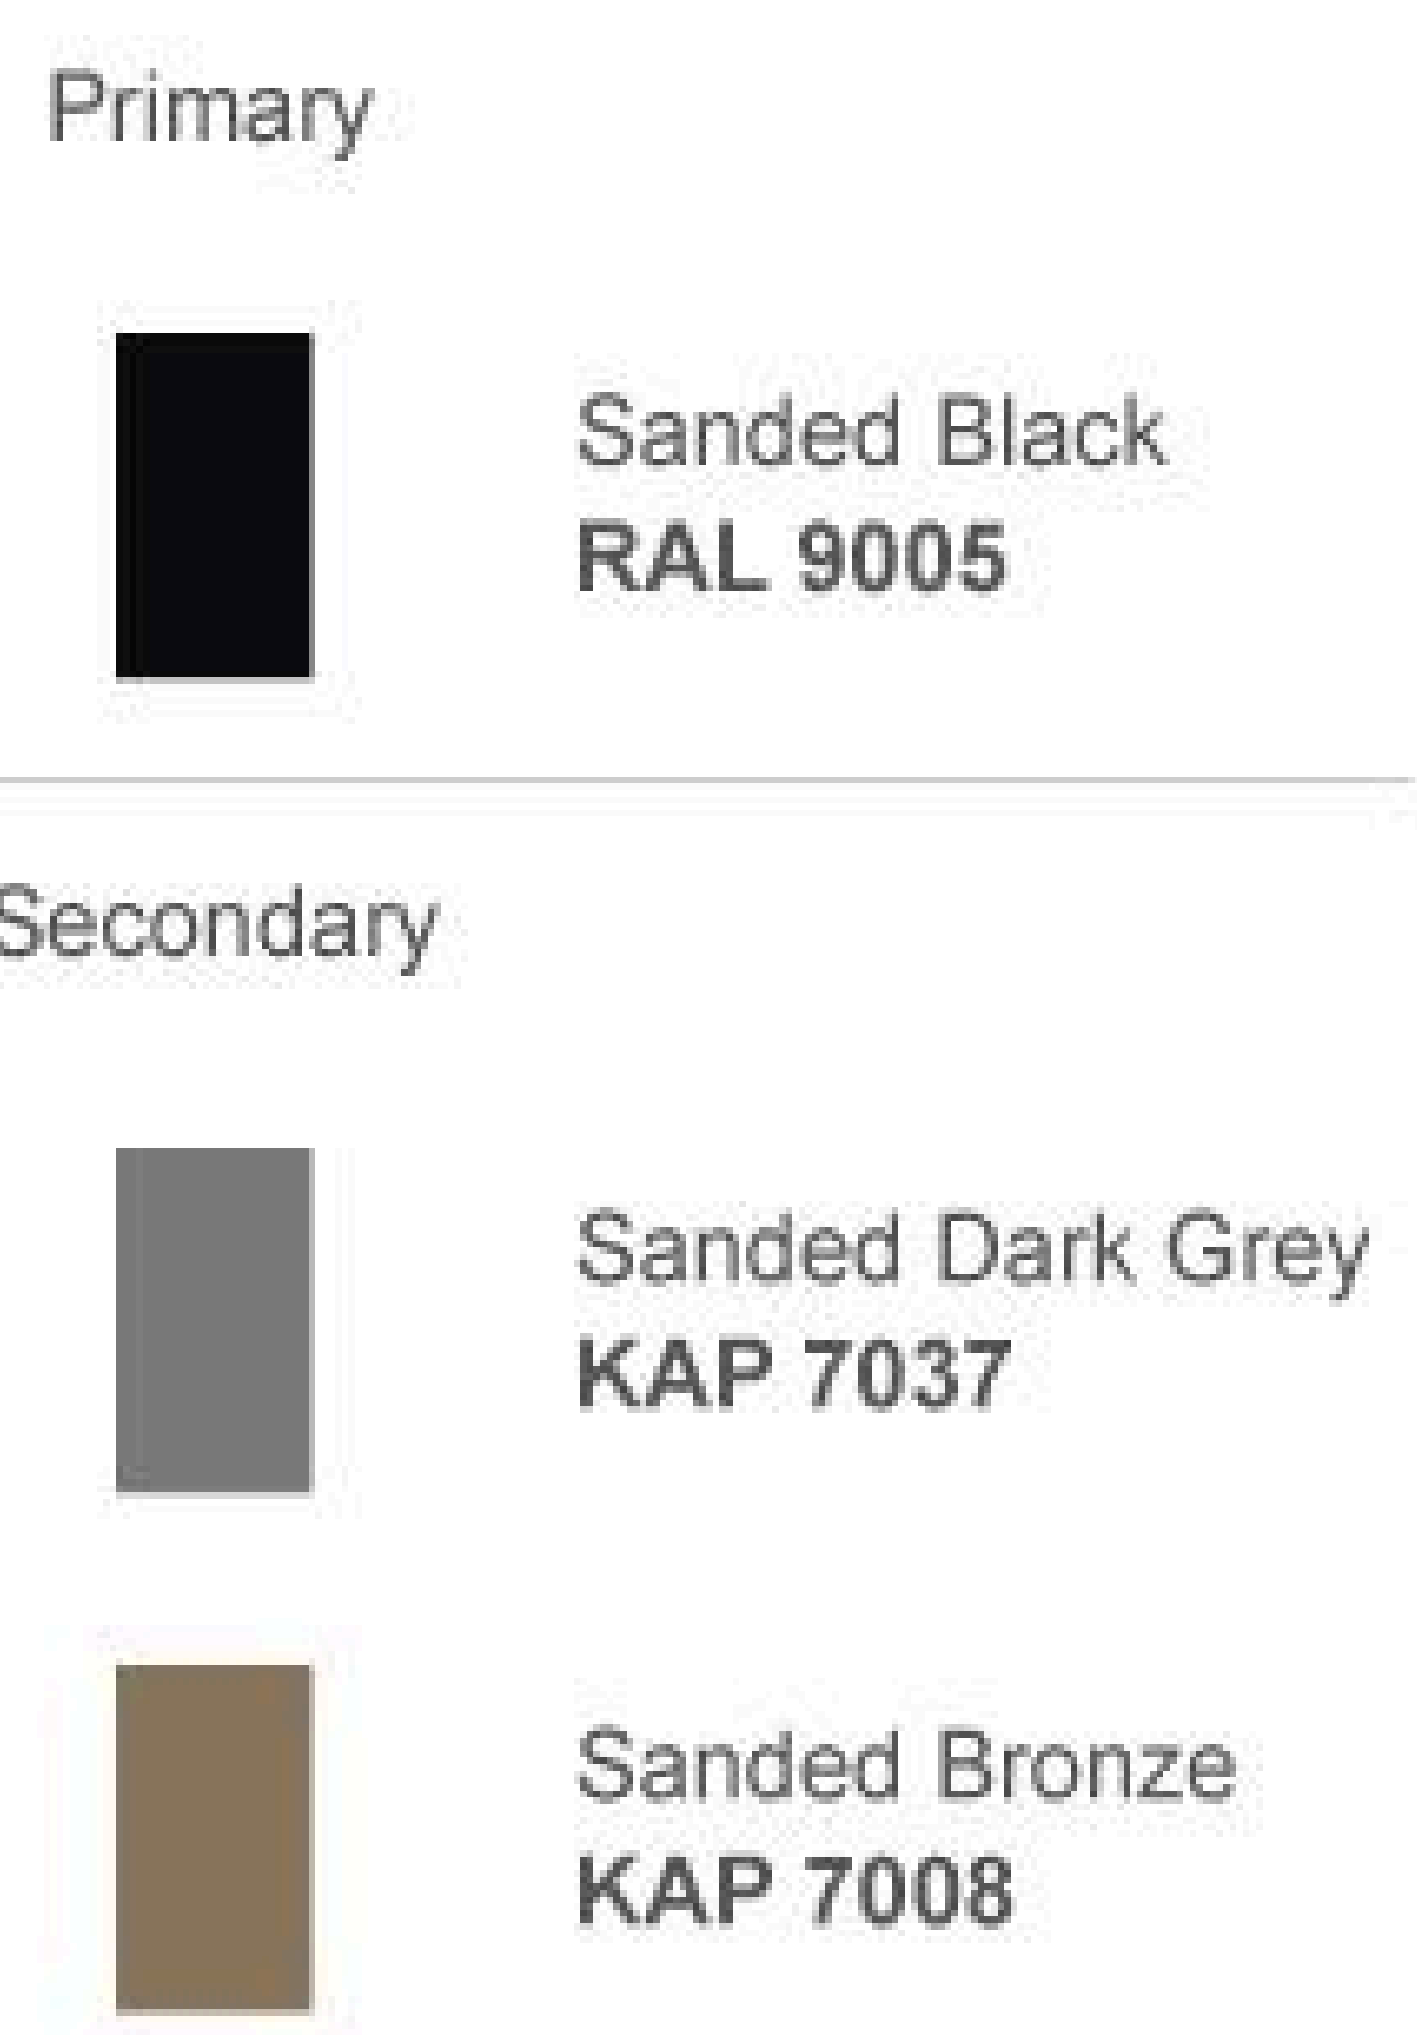

Base Options

| Source Mounting Base | Inground Base (Optional) | Ground Anchor Base (Optional) |
|--|--------------------------|---|
| <p>Type A Flange Base Non-Detachable</p> | <p>JC3001</p> | <p>22A</p> <p>Installation steps (Optional)</p> |
| <p>Type B Non-flange Base Detachable</p> | <p>JC3002</p> | <p>25A</p> <p>Installation steps (Optional)</p> |

Beam Demo

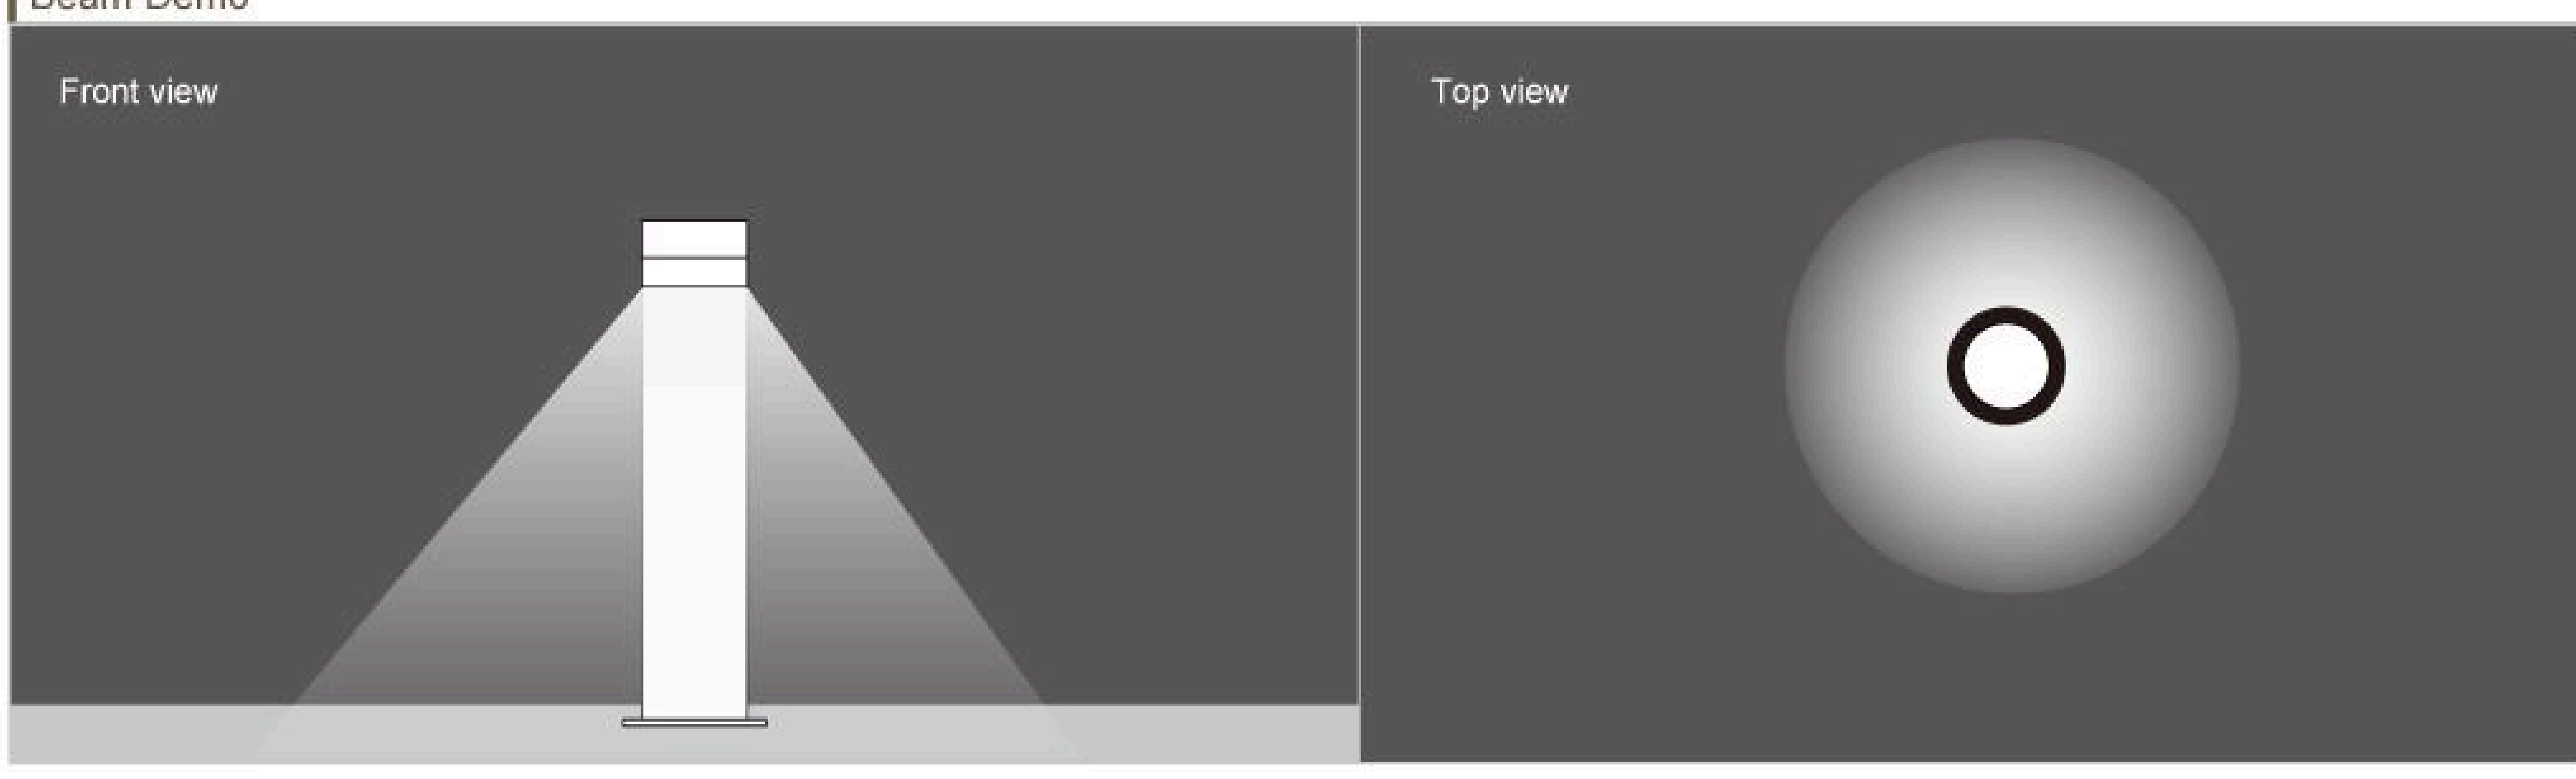

Photometric

